

# Airplane Flying Handbook (FAA-H-8083-3C)

## Chapter 18: Emergency Procedures

### Introduction

This chapter describes certain abnormal and emergency situations that may occur in flight. The key to successful management of an emergency situation, and/or preventing an abnormal situation from progressing into a true emergency, is a thorough familiarity with, and adherence to, the procedures developed by the airplane manufacturer. The following guidelines are generic and are not meant to replace the airplane manufacturer's recommended procedures contained in the Federal Aviation Administration (FAA) approved Airplane Flight Manual and/or Pilot's Operating Handbook (AFM/POH). Rather, they are meant to enhance the pilot's general knowledge in the area of abnormal and emergency operations. If any of the guidance in this chapter conflicts in any way with the manufacturer's recommended procedures for a particular make and model airplane, the manufacturer's recommended procedures take precedence.

### Emergency Landings

This section contains information on emergency landing techniques in small fixed-wing airplanes. The guidelines that are presented apply to the more adverse terrain conditions for which no practical training is possible. The objective is to instill in the pilot the knowledge that almost any terrain can be considered "suitable" for a survivable crash landing if the pilot knows how to use the airplane structure for self-protection and the protection of passengers.

### Types of Emergency Landings

The different types of emergency landings are defined as follows:

- Forced landing—an immediate landing, on or off an airport, necessitated by the inability to continue further flight. A typical example of which is an airplane forced down by engine failure.
- Precautionary landing—a premeditated landing, on or off an airport, when further flight is possible but inadvisable. Examples of conditions that may call for a precautionary landing include deteriorating weather, being lost, fuel shortage, and gradually developing engine trouble.
- Ditching—a forced or precautionary landing on water.

A precautionary landing, generally, is less hazardous than a forced landing because the pilot has more time for terrain selection and the planning of the approach. In addition, the pilot can use power to compensate for errors in judgment or technique. The pilot should be aware that too many situations calling for a precautionary landing are allowed to develop into immediate forced landings, when the pilot uses wishful thinking instead of reason, especially when dealing with a self-inflicted predicament. The non-instrument-rated pilot trapped by weather, or the pilot facing imminent fuel exhaustion who does not give any thought to the feasibility of a precautionary landing, accepts an extremely hazardous alternative.

### Psychological Hazards

There are several factors that may interfere with a pilot's ability to act promptly and properly when faced with an emergency. Some of these factors are listed below.

- Reluctance to accept the emergency situation—a pilot who allows the mind to become paralyzed at the thought that the airplane will be on the ground in a very short time, regardless of the pilot's actions or hopes, is severely handicapped in the handling of the emergency. An unconscious desire to delay the dreaded moment may lead to such errors as: failure to lower the nose to maintain flying speed, delay in the selection of the most suitable landing area within reach, and indecision in general. Desperate attempts to correct whatever went wrong at the expense of airplane control fall into the same category.
- Undue concern about getting hurt—fear is a vital part of the self-preservation mechanism. However, when fear leads to panic, we invite that which we want most to avoid. The survival records favor pilots who maintain their composure and know how to apply the general concepts and procedures that have been developed through the years. The success of an emergency landing is as much a matter of the mind as of skills.

- Desire to save the airplane—the pilot who has been conditioned during training to expect to find a relatively safe landing area, whenever the flight instructor closed the throttle for a simulated forced landing, may ignore all basic rules of airmanship to avoid a touchdown in terrain where airplane damage is unavoidable. Typical consequences are: making a 180° turn back to the runway when available altitude is insufficient; stretching the glide without regard for minimum control speed in order to reach a more appealing field; and accepting an approach and touchdown situation that leaves no margin for error. The desire to save the airplane, regardless of the risks involved, may be influenced by two other factors: the pilot's financial stake in the airplane and the certainty that an undamaged airplane implies no bodily harm. There are times, however, when a pilot should be more interested in sacrificing the airplane so that the occupants can safely walk away from it.

## Basic Safety Concepts

### General

A pilot who is faced with an emergency landing in terrain that makes extensive airplane damage inevitable should keep in mind that the avoidance of crash injuries is largely a matter of: (1) keeping the vital structure (cabin area) relatively intact by using dispensable structure (i.e., wings, landing gear, fuselage bottom) to absorb the violence of the stopping process before it affects the occupants and (2) avoiding forceful bodily contact with interior structure. Avoiding forcible contact with interior structure is a matter of seat and body security. Unless the occupant decelerates at the same rate as the surrounding structure, no benefit is realized from its relative intactness. The occupant is brought to a stop violently in the form of a secondary collision.

The advantage of sacrificing dispensable structure is demonstrated daily on the highways. A head-on car impact against a tree at 20 miles per hour (mph) is less hazardous for a properly restrained driver than a similar impact against the driver's door. Accident experience shows that the extent of crushable structure between the occupants and the principal point of impact on the airplane has a direct bearing on the severity of the transmitted crash forces and, therefore, on survivability.

Dispensable airplane structure is not the only available energy absorbing medium in an emergency situation. Vegetation, trees, and even manmade structures may be used for this purpose. Cultivated fields with dense crops, such as mature corn and grain, are almost as effective in bringing an airplane to a stop with repairable damage as an emergency arresting device on a runway. [Figure 18-1] Brush and small trees provide considerable cushioning and braking effect without destroying the airplane. When dealing with natural and manmade obstacles with greater strength than the dispensable airplane structure, the pilot should plan the touchdown in such a manner that only nonessential structure is "used up" in the principal slowing-down process.


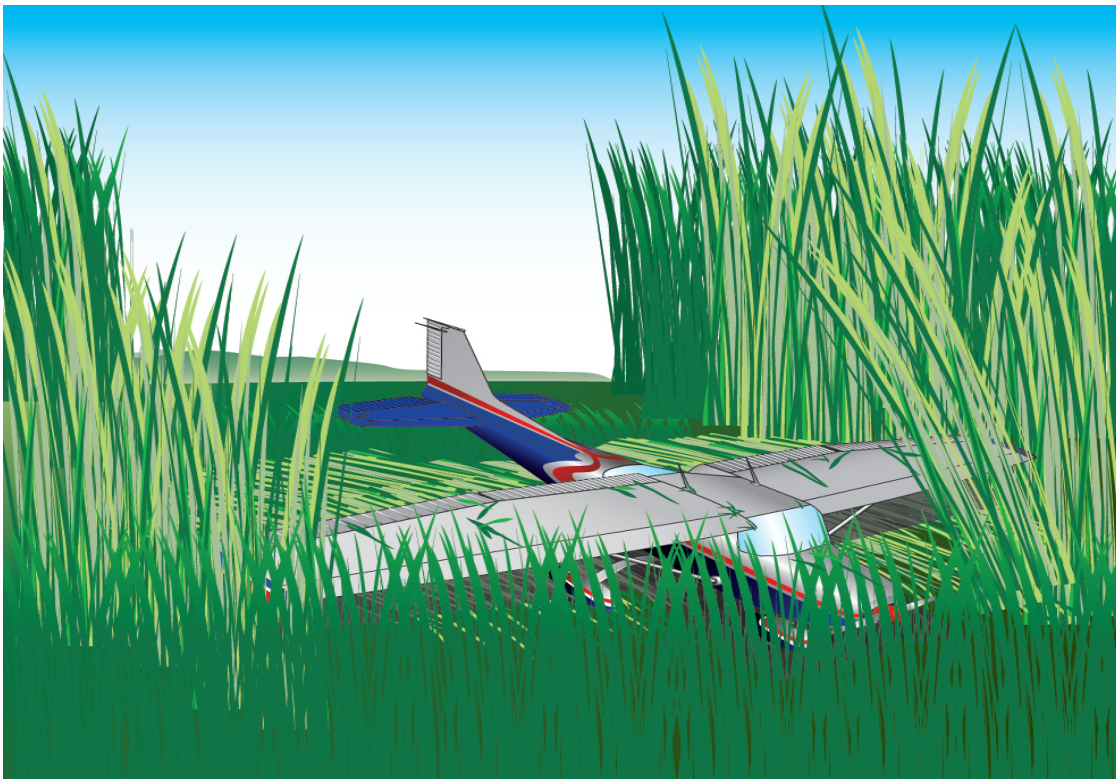


Figure 18-1. Using vegetation to absorb energy.

The overall severity of a deceleration process is governed by speed (groundspeed) and stopping distance. The most critical of these is speed; doubling the groundspeed means quadrupling the total destructive energy and vice versa. Even a small change in groundspeed at touchdown—be it as a result of wind or pilot technique—affects the outcome of a controlled crash. It is important that the actual touchdown during an emergency landing be made at the lowest possible controllable airspeed, using all available aerodynamic devices.

Most pilots instinctively—and correctly—look for the largest available flat and open field for an emergency landing. Actually, very little stopping distance is required if the speed can be dissipated uniformly; that is, if the deceleration forces can be spread evenly over the available distance. This concept is designed into the arresting gear of aircraft carriers that provides a nearly constant stopping force from the moment of hookup.

The typical light airplane is designed to provide protection in crash landings that expose the occupants to nine times the acceleration of gravity (9G) in a forward direction. Assuming a uniform 9G deceleration, at 50 mph the required stopping distance is about 9.4 feet. While at 100 mph, the stopping distance is about 37.6 feet—about four times as great. [Figure 18-2] Although these figures are based on an ideal deceleration process, it is interesting to note what can be accomplished in an effectively used short stopping distance. Understanding the need for a firm but uniform deceleration process in very poor terrain enables the pilot to select touchdown conditions that spread the breakup of dispensable structure over a short distance, thereby reducing the peak deceleration of the cabin area.

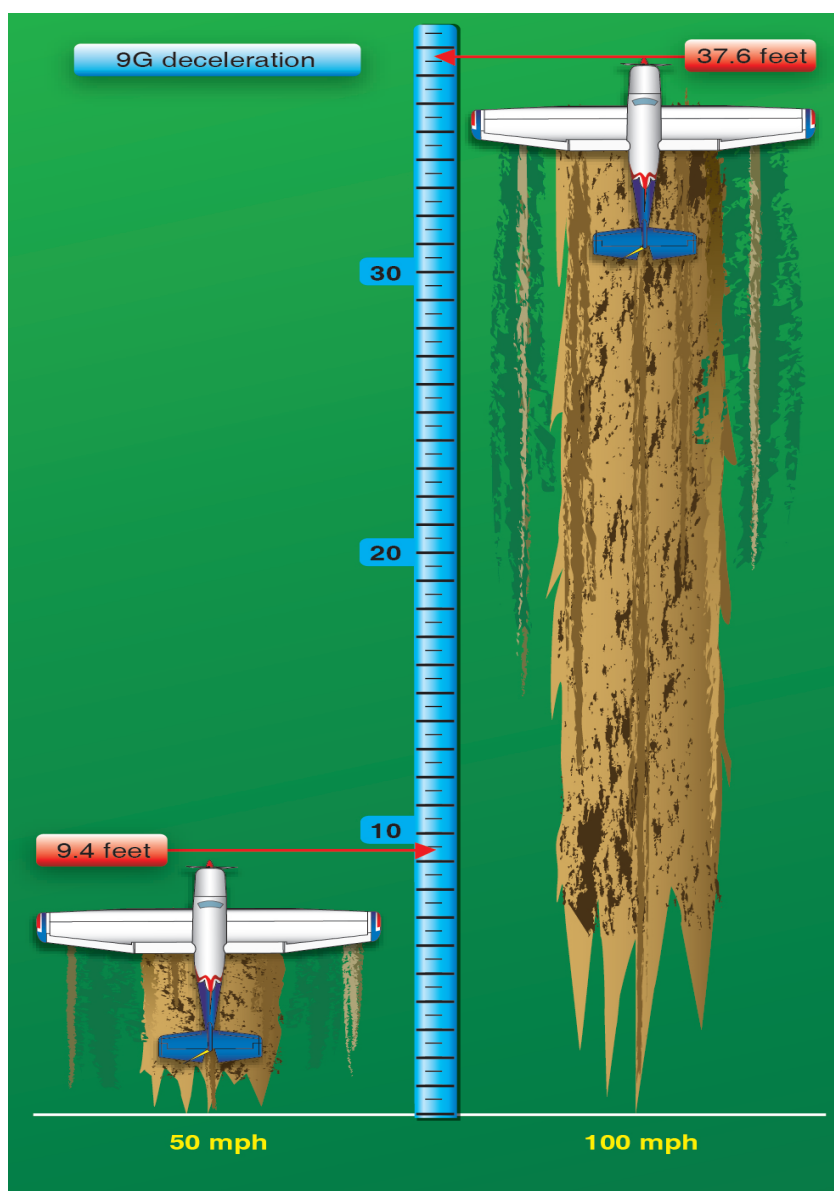

**Figure 18-2.** *Stopping distance vs. groundspeed.*

## Attitude and Sink Rate Control

The most critical and often the most inexcusable error that can be made in the planning and execution of an emergency landing, even in ideal terrain, is the loss of initiative over the airplane's attitude and sink rate at touchdown. When the touchdown is made on flat, open terrain, an excessive nose-low pitch attitude brings the risk of "sticking" the nose in the ground. Steep bank angles just before touchdown should also be avoided, as they increase the stalling speed and the likelihood of a wingtip strike.

Since the airplane's vertical component of velocity is immediately reduced to zero upon ground contact, it should be kept well under control. A flat touchdown at a high sink rate (well in excess of 500 feet per minute (fpm)) on a hard surface can be injurious without destroying the cabin structure, especially during gear-up landings in low-wing airplanes. A rigid bottom construction of these airplanes may preclude adequate cushioning by structural deformation. Similar impact conditions may cause structural collapse of the overhead structure in high-wing airplanes. On soft terrain, an excessive sink rate may cause digging in of the lower nose structure and severe forward deceleration.

## Terrain Selection

A pilot's choice of emergency landing sites is governed by:

- The route selected during preflight planning
- The height above the ground when the emergency occurs
- Excess airspeed (excess airspeed can be converted into distance and/or altitude)

The only time the pilot has a very limited choice is during the low and slow portion of the takeoff. However, even under these conditions, the ability to change the impact heading only a few degrees may ensure a survivable crash.

If beyond gliding distance of a suitable open area, the pilot should judge the available terrain for its energy absorbing capability. If the emergency starts at a considerable height above the ground, the pilot should be more concerned about first selecting the desired general area than a specific spot. Terrain appearances from altitude can be very misleading and considerable altitude may be lost before the best spot can be pinpointed. For this reason, the pilot should not hesitate to discard the original plan for one that is obviously better. However, as a general rule, the pilot should not change his or her mind more than once; a well-executed crash landing in poor terrain can be less hazardous than an uncontrolled touchdown on an established field.

## Airplane Configuration

Since flaps improve maneuverability at slow speed, and lower the stalling speed, their use during final approach is recommended when time and circumstances permit. However, the associated increase in drag and decrease in gliding distance call for caution in the timing and the extent of their application; premature use of flap and dissipation of altitude may jeopardize an otherwise sound plan.

A hard and fast rule concerning the position of a retractable landing gear at touchdown cannot be given. In rugged terrain and trees, or during impacts at high sink rate, an extended gear would definitely have a protective effect on the cabin area. However, this advantage has to be weighed against the possible side effects of a collapsing gear, such as a ruptured fuel tank. As always, the manufacturer's recommendations as outlined in the AFM/POH should be followed.

When a normal touchdown is assured, and ample stopping distance is available, a gear-up landing on level, but soft terrain or across a plowed field may result in less airplane damage than a gear-down landing. [Figure 18-3] Deactivation of the airplane's electrical system before touchdown reduces the likelihood of a post-crash fire.


However, the battery master switch should not be turned off until the pilot no longer has any need for electrical power to operate vital airplane systems. Positive airplane control during the final part of the approach has priority over all other considerations, including airplane configuration and checklist tasks. The pilot should attempt to exploit the power available from an irregularly running engine; however, it is generally better to switch the engine and fuel off just before touchdown. This not only ensures the pilot's initiative over the situation, but a cooled-down engine reduces the fire hazard considerably.

## Approach

When the pilot has time to maneuver, the planning of the approach should be governed by the following three factors:

- Wind direction and velocity
- Dimensions and slope of the chosen field
- Obstacles in the final approach path



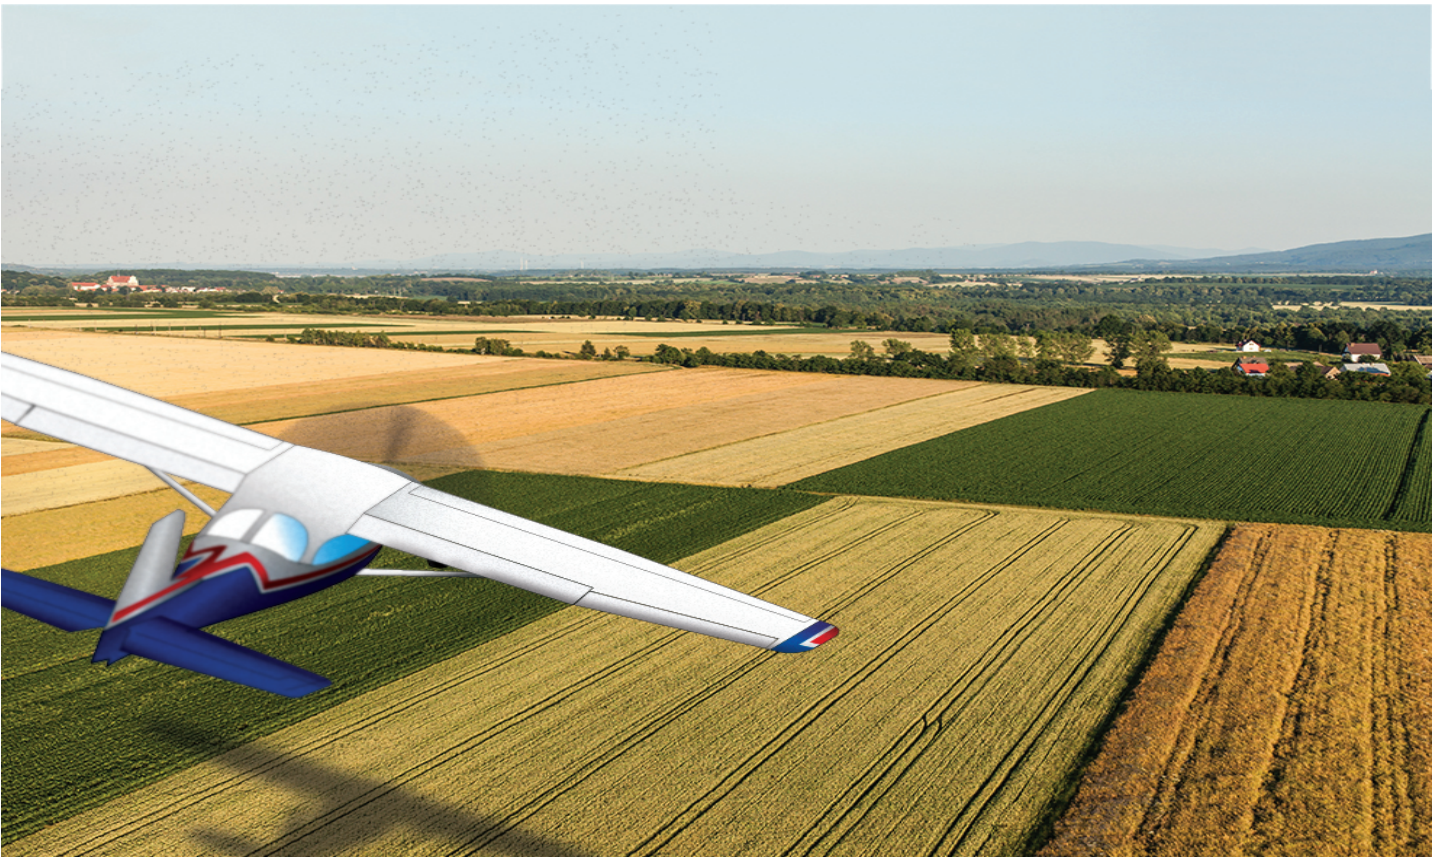

**Figure 18-3.** *Intentional gear-up landing.*

These three factors are seldom compatible. When compromises have to be made, the pilot should aim for a wind/obstacle/terrain combination that permits a final approach with some margin for error in judgment or technique. A pilot who overestimates the gliding range may be tempted to stretch the glide across obstacles in the approach path. For this reason, it is sometimes better to plan the approach over an unobstructed area, regardless of wind direction. Experience shows that a collision with obstacles at the end of a ground roll or slide is much less hazardous than striking an obstacle at flying speed before the touchdown point is reached.

## **Terrain Types**

Since an emergency landing on suitable terrain resembles a situation in which the pilot should be familiar through training, only the more unusual situations are discussed.

### **Confined Areas**

The natural preference to set the airplane down on the ground should not lead to the selection of an open spot between trees or obstacles where the ground cannot be reached without making a steep descent.

Once the intended touchdown point is reached, and the remaining open and unobstructed space is very limited, it may be better to force the airplane down on the ground than to delay touchdown until it stalls (settles). An airplane decelerates faster after it is on the ground than while airborne. Thought may also be given to the desirability of ground-looping or retracting the landing gear in certain conditions.

A river or creek can be an inviting alternative in otherwise rugged terrain. The pilot should ensure that the water or creek bed can be reached without snagging the wings. The same concept applies to road landings with one additional reason for caution: manmade obstacles on either side of a road may not be visible until the final portion of the approach.

When planning the approach across a road, it should be remembered that most highways and even rural dirt roads are paralleled by power or telephone lines. Only a sharp lookout for the supporting structures or poles may provide timely warning.

### **Trees (Forest)**

Although a tree landing is not an attractive prospect, the following general guidelines help to make the experience survivable.



- Use the normal landing configuration (full flaps, gear down).
- Keep the groundspeed low by heading into the wind.
- Make contact at minimum indicated airspeed, but not below stall speed, and “hang” the airplane in the tree branches in a nose-high landing attitude. Involving the underside of the fuselage and both wings in the initial tree contact provides a more even and positive cushioning effect, while preventing penetration of the windshield. [Figure 18-4]
- Avoid direct contact of the fuselage with heavy tree trunks.
- Low, closely spaced trees with wide, dense crowns (branches) close to the ground are much better than tall trees with thin tops; the latter allow too much free fall height (a free fall from 75 feet results in an impact speed of about 40 knots, or about 4,000 fpm).
- Ideally, initial tree contact should be symmetrical; that is, both wings should meet equal resistance in the tree branches. This distribution of the load helps to maintain proper airplane attitude. It may also preclude the loss of one wing, which invariably leads to a more rapid and less predictable descent to the ground.
- If heavy tree trunk contact is unavoidable once the airplane is on the ground, it is best to involve both wings simultaneously by directing the airplane between two properly spaced trees. Do not attempt this maneuver, however, while still airborne.



**Figure 18-4.** *Tree landing.*

## Water (Ditching) and Snow

A well-executed water landing normally involves less deceleration violence than a poor tree landing or a touchdown on extremely rough terrain. Also, an airplane that is ditched at minimum speed and in a normal landing attitude does not immediately sink upon touchdown. Intact wings and fuel tanks (especially when empty) provide floatation for at least several minutes, even if the cabin may be just below the water line in a high-wing airplane.

Loss of depth perception may occur when landing on a wide expanse of smooth water with the risk of flying into the water or stalling in from excessive altitude. To avoid this hazard, the airplane should be “dragged in” when possible. Use no more than intermediate flaps on low-wing airplanes. The water resistance of fully extended flaps may result in asymmetrical flap failure and slowing of the airplane. Keep a retractable gear up unless the AFM/POH advises otherwise.

A landing in snow should be executed like a ditching, in the same configuration and with the same regard for loss of depth perception (white out) in reduced visibility and on wide-open terrain.

## Engine Failure After Takeoff (Single-Engine)

A number of variables and pilot actions factor into a successful emergency landing shortly after takeoff. When an engine failure occurs during the initial climb, the pilot should lower the nose of the airplane and establish the proper glide attitude. What happens next if the engine does not restart? Does the pilot select a field directly ahead (or slightly to the side of the takeoff path) or should the pilot turn back toward the point of departure? There's not much time to decide and a lot to consider.


Continuing straight ahead or making a slight turn gives the pilot time to establish a safe landing attitude, and the landing occurs under control and as slowly as possible (assuming a takeoff made into a headwind). This minimizes the risk of injury and usually represents the option with the lowest risk—i.e. the safest option. Turning back requires a more complex analysis and consideration of risk. At some urban airports, there may be numerous hazards in the departure path. In that case, the pilot might turn back, but only if certain the airplane can reach the field from its current position and the pilot has trained and practiced the turn back maneuver.

Turning back to an airport after a low-altitude engine failure, also known as “the impossible turn,” presents many challenges, and a pilot who attempts to turn back without due consideration and training will need considerable luck to prevent disaster. If the airplane strikes the ground during the turn, cartwheeling could occur. If the pilot does not lower the nose sufficiently during the turn, an accelerated stall and fatal crash may occur. Even after executing a successful turn, a return to the airport often results in a downwind approach. The increased groundspeed could rush a pilot not properly trained for landing downwind. The increased groundspeed and associated increase in kinetic energy also raise the likelihood of serious injury if unable to make the field.

If considering a turn back to the runway following an engine failure on takeoff, the pilot should know the expected altitude loss during the turn for the specific make and model airplane as well as whether the airplane can physically glide back to the field after executing the turn. Traditionally, the FAA has given the following example. An airplane has taken off and climbed to an altitude of 300 feet above ground level (AGL) when the engine fails. [Figure 18-5] After a typical 4-second reaction time, the pilot elects to turn back to the runway. Using a standard rate ( $3^\circ$  change in direction per second) turn, it takes 1 minute to turn  $180^\circ$ . At a glide speed of 65 knots, the radius of the turn is 2,100 feet, so at the completion of the turn, the airplane is 4,200 feet to one side of the runway. The pilot needs to turn another  $45^\circ$  to head the airplane toward the runway. By this time, the total change in direction is  $225^\circ$  equating to 75 seconds plus the 4-second reaction time. If the airplane in a power-off glide descends at approximately 1,000 fpm, it has descended 1,316 feet placing it 1,016 feet below the runway.

The preceding example illustrates why a turn back, if attempted, requires a turn with a higher bank angle. A standard rate or shallow turn consumes too much time, requires too much distance, and generates an unacceptable solution.

Training for a turn back includes practicing turns in both directions at a safe altitude in the make and model flown after simulating an engine failure from a climb. Practice should result in consistent altitude loss and the ability to avoid an accelerated stall when executing a gliding steep turn. Pilots should be alert for and respond appropriately to any stall warning and reduce wing loading during the turn as necessary. There will be some observed variation in altitude loss during training. The pilot should anticipate that during an actual emergency, the expected altitude loss could end up at the high end of the range observed while practicing. Success in training involves the demonstrated ability to evaluate the effect of climb performance of the airplane, determine the better direction to turn back (usually into a crosswind), predict the altitude above ground after the turn, know the distance to the landing zone, and know if the glide performance of the airplane will allow the pilot to make the field. Some airplanes cannot usually make the return successfully, some can make the return under certain conditions, and some can usually return. The pilot should not attempt a turn back unless a successful turn back will result.

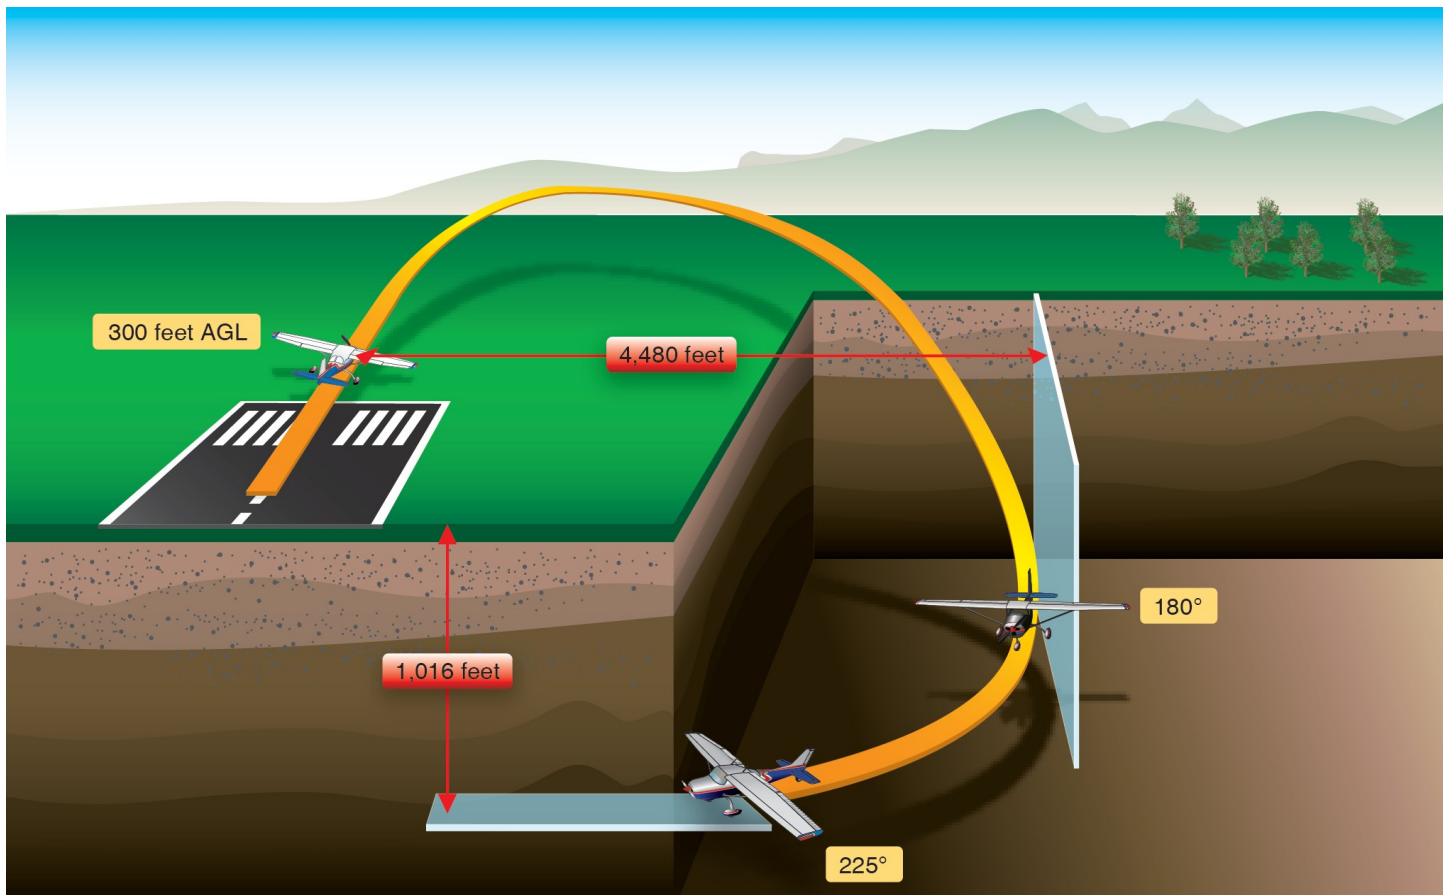

**Figure 18-5.** *Turning back to the runway after engine failure.*


A turn back to the departure runway may require more than a 180° change in direction. There could also be cases where turning back results in overshooting the runway, and the pilot needs to sense the aiming point within seconds after completing a turn back and make any necessary adjustments to achieve the best possible outcome. A turn back at low altitudes presents an unacceptable risk for student pilots, low-time pilots, untrained pilots, pilots without adequate proficiency, and pilots flying airplanes with insufficient glide performance to return to the field. However, experienced pilots interested in knowing when and how to make an emergency turn back after takeoff should use the services of an authorized flight instructor who can explain and demonstrate the practicality (or impracticality) of “the impossible turn” in the specific make and model used during training.

## Emergency Descents

An emergency descent is a maneuver for descending as rapidly as possible to a lower altitude or to the ground for an emergency landing. [Figure 18-6] The need for this maneuver may result from an uncontrollable fire, a sudden loss of cabin pressurization, or any other situation demanding an immediate and rapid descent. The objective is to descend the airplane as soon and as rapidly as possible while not exceeding any structural limitations of the airplane. Simulated emergency descents should be made in a turn to check for other air traffic below and to look around for a possible emergency landing area. A radio call announcing descent intentions may be appropriate to alert other aircraft in the area. When initiating the descent, a bank of approximately 30 to 45° should be established to maintain positive load factors (G forces) on the airplane.

Emergency descent training should be performed as recommended by the manufacturer, including the configuration and airspeeds. Except when prohibited by the manufacturer, the power should be reduced to idle, and the propeller control (if equipped) should be placed in the low pitch (or high revolutions per minute (rpm)) position. This allows the propeller to act as an aerodynamic brake to help prevent an excessive airspeed buildup during the descent. The landing gear and flaps should be extended as recommended by the manufacturer. This provides maximum drag so that the descent can be made as rapidly as possible, without excessive airspeed. The pilot should not allow the airplane’s airspeed to pass the never-exceed speed ( $V_{NE}$ ), the maximum landing gear extended speed ( $V_{LE}$ ), or the maximum flap extended speed ( $V_{FE}$ ), as applicable. In the case of an engine fire, a high airspeed descent could blow out the fire. However, the weakening of the airplane structure is a major concern and descent at low airspeed would place less stress on the airplane. If the descent is conducted in turbulent conditions, the pilot also needs to comply with the design maneuvering speed ( $V_A$ ) limitations. The descent should be made at the maximum allowable airspeed consistent with the procedure used. This provides increased drag and a high rate of descent. The recovery from an emergency descent should be initiated at a high enough altitude to ensure a safe recovery back to level flight or a precautionary landing.



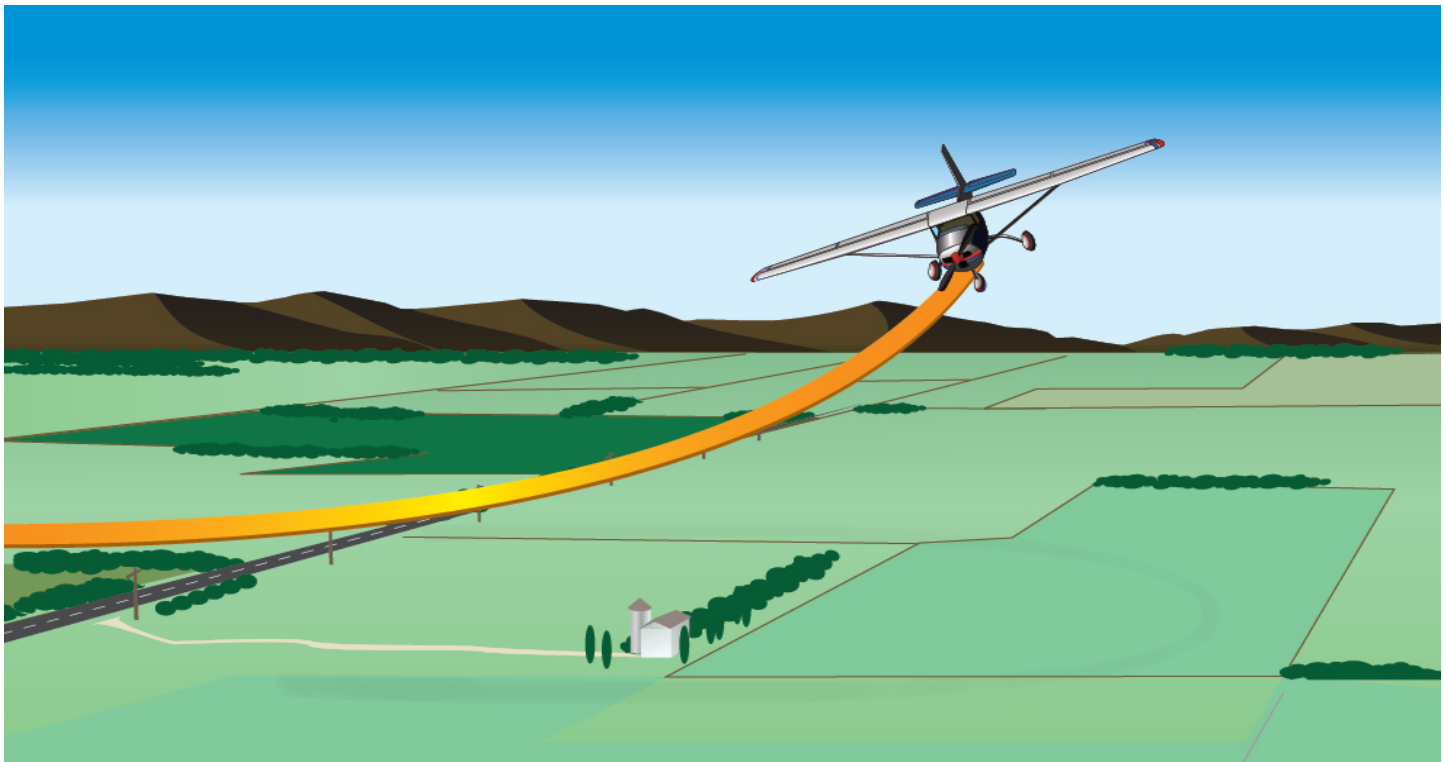

**Figure 18-6. Emergency descent.**

When the descent is established and stabilized during training and practice, the descent should be terminated. In airplanes with piston engines, prolonged practice of emergency descents should be avoided to prevent excessive cooling of the engine cylinders.

## **In-Flight Fire**

A fire in-flight demands immediate and decisive action. The pilot should be familiar with the procedures outlined to meet this emergency contained in the AFM/POH for the particular airplane. For the purposes of this handbook, in-flight fires are classified as in-flight engine fires, electrical fires, and cabin fires.

### **Engine Fire**

An in-flight engine compartment fire is usually caused by a failure that allows a flammable substance, such as fuel, oil, or hydraulic fluid, to come in contact with a hot surface. This may be caused by a mechanical failure of the engine itself, an engine-driven accessory, a defective induction or exhaust system, or a broken line. Engine compartment fires may also result from maintenance errors, such as improperly installed/fastened lines and/or fittings resulting in leaks.

Engine compartment fires can be indicated by smoke and/or flames coming from the engine cowling area. They can also be indicated by discoloration, bubbling, and/or melting of the engine cowling skin in cases where flames and/or smoke are not visible to the pilot. By the time a pilot becomes aware of an in-flight engine compartment fire, it usually is well developed. Unless the airplane manufacturer directs otherwise in the AFM/POH, the first step on discovering a fire should be to shut off the fuel supply to the engine by placing the mixture control in the idle cut off position and the fuel selector shutoff valve to the OFF position. The ignition switch should be left ON in order to use up the fuel that remains in the fuel lines and components between the fuel selector/shutoff valve and the engine. This procedure may starve the engine compartment of fuel and cause the fire to die naturally. If the flames are snuffed out, no attempt should be made to restart the engine.

If the engine compartment fire is oil-fed, as evidenced by thick black smoke, as opposed to a fuel-fed fire, which produces bright orange flames, the pilot should consider stopping the propeller rotation by feathering or other means, such as (with constant-speed propellers) placing the pitch control lever to the minimum rpm position and raising the nose to reduce airspeed until the propeller stops rotating. This procedure stops an engine-driven oil (or hydraulic) pump from continuing to pump the flammable fluid that is feeding the fire.

Some light airplane emergency checklists direct the pilot to shut off the electrical master switch. However, the pilot should consider that unless the fire is electrical in nature, or a crash landing is imminent, deactivating the electrical system prevents the use of panel radios for transmitting distress messages and also causes air traffic control (ATC) to lose transponder returns.



Pilots of powerless single-engine airplanes are left with no choice but to make a forced landing. Pilots of twin-engine airplanes may elect to continue the flight to the nearest airport. However, consideration should be given to the possibility that a wing could be seriously impaired and lead to structural failure. Even a brief but intense fire could cause dangerous structural damage. In some cases, the fire could continue to burn under the wing (or engine cowling in the case of a single-engine airplane) out of view of the pilot. Engine compartment fires that appear to have been extinguished have been known to rekindle with changes in airflow pattern and airspeed.

The pilot should be familiar with the airplane's emergency descent procedures. The pilot should also bear in mind the following:

- The airplane may be severely structurally damaged to the point that its ability to remain under control could be lost at any moment.
- The airplane may still be on fire and susceptible to explosion.
- The airplane is expendable and the only thing that matters is the safety of those on board.

## **Electrical Fires**

The initial indication of an electrical fire is usually the distinct odor of burning insulation. Once an electrical fire is detected, the pilot should attempt to identify the faulty circuit by checking circuit breakers, instruments, avionics, and lights. If the faulty circuit cannot be readily detected and isolated, and flight conditions permit, the battery master switch and alternator/generator switches should be turned off to remove the possible source of the fire. However, any materials that have been ignited may continue to burn.

If electrical power is absolutely essential for the flight, an attempt may be made to identify and isolate the faulty circuit by:

1. Turning the electrical master switch OFF.
2. Turning all individual electrical switches OFF.
3. Turning the master switch back ON.
4. Selecting electrical switches that were ON before the fire indication one at a time, permitting a short time lapse after each switch is turned on to check for signs of odor, smoke, or sparks.

This procedure, however, has the effect of recreating the original problem. The most prudent course of action is to land as soon as possible.

## **Cabin Fire**

Cabin fires generally result from one of three sources: (1) careless smoking on the part of the pilot and/or passengers; (2) electrical system malfunctions; or (3) heating system malfunctions. A fire in the cabin presents the pilot with two immediate demands: attacking the fire and getting the airplane safely on the ground as quickly as possible. A fire or smoke in the cabin should be controlled by identifying and shutting down the faulty system. In many cases, smoke may be removed from the cabin by opening the cabin air vents. This should be done only after the fire extinguisher (if available) is used. Then the cabin air control can be opened to purge the cabin of both smoke and fumes. If smoke increases in intensity when the cabin air vents are opened, they should be immediately closed. This indicates a possible fire in the heating system, nose compartment baggage area (if so equipped), or that the increase in airflow is feeding the fire.

On pressurized airplanes, the pressurization air system removes smoke from the cabin; however, if the smoke is intense, it may be necessary to either depressurize at altitude, if oxygen is available for all occupants, or execute an emergency descent.

In unpressurized single-engine and light twin-engine airplanes, the pilot can attempt to expel the smoke from the cabin by opening the foul weather windows. These windows should be closed immediately if the fire becomes more intense. If the smoke is severe, the passengers and crew should use oxygen masks if available, and the pilot should initiate an immediate descent. The pilot should also be aware that on some airplanes, lowering the landing gear and/or wing flaps can aggravate a cabin smoke problem.

## **Flight Control Malfunction/Failure**

### **Total Flap Failure**

The inability to extend the wing flaps necessitates a no-flap approach and landing. In light airplanes, a no-flap approach and landing is not particularly difficult or dangerous. However, there are certain factors that should be considered in the execution of this maneuver. A no-flap landing requires substantially more runway than normal. The increase in required landing distance could be as much as 50 percent.

When flying in the traffic pattern with the wing flaps retracted, the airplane should be flown in a relatively nose-high attitude to maintain altitude, as compared to flight with flaps extended. Losing altitude can be more of a problem without the benefit of the drag normally provided by flaps. A wider, longer traffic pattern may be required in order to avoid the necessity of diving to lose altitude and consequently building up excessive airspeed.

On final approach, a nose-high attitude can make it difficult to see the runway. This situation, if not anticipated, can result in serious errors in judgment of height and distance. Approaching the runway in a relatively nose-high attitude can also cause the perception that the airplane is close to a stall. This may cause the pilot to lower the nose abruptly and risk touching down on the nose-wheel.

With the flaps retracted and the power reduced for landing, the airplane is slightly less stable in the pitch and roll axes. Without flaps, the airplane tends to float considerably during roundout. The pilot should avoid the temptation to force the airplane onto the runway at an excessively high speed. Neither should the pilot flare excessively because without flaps, this might cause the tail to strike the runway.

### **Asymmetric (Split) Flap**

An asymmetric “split” flap situation is one in which one flap deploys or retracts while the other remains in position. The problem is indicated by a pronounced roll toward the wing with the least flap deflection when wing flaps are extended/retracted.

The roll encountered in a split flap situation is countered with opposite aileron. The yaw caused by the additional drag created by the extended flap requires substantial opposite rudder resulting in a cross-control condition. Almost full aileron may be required to maintain a wings-level attitude, especially at the reduced airspeed necessary for approach and landing. The pilot should not attempt to land with a crosswind from the side of the deployed flap because the additional roll control required to counteract the crosswind may not be available.

The approach to landing with a split flap condition should be flown at a higher than normal airspeed. The pilot should not risk an asymmetric stall and subsequent loss of control by flaring excessively. Rather, the airplane should be flown onto the runway so that the touchdown occurs at an airspeed consistent with a safe margin above flaps-up stall speed.

### **Loss of Elevator Control**

In many airplanes, the elevator is controlled by two cables: a “down” cable and an “up” cable. Normally, a break or disconnect in only one of these cables does not result in a total loss of elevator control. In most airplanes, a failed cable results in a partial loss of pitch control. In the failure of the “up” elevator cable (the “down” elevator being intact and functional), the control yoke moves aft easily but produces no response. Forward yoke movement, however, beyond the neutral position produces a nose-down attitude. Conversely, a failure of the “down” elevator cable, forward movement of the control yoke produces no effect. The pilot, however, has partial control of pitch attitude with aft movement.

When experiencing a loss of up-elevator control, the pilot can retain pitch control by:

- Applying considerable nose-up trim
- Pushing the control yoke forward to attain and maintain desired attitude
- Increasing forward pressure to lower the nose and relaxing forward pressure to raise the nose
- Releasing forward pressure to flare for landing

When experiencing a loss of down-elevator control, the pilot can retain pitch control by:

- Applying considerable nose-down trim
- Pulling the control yoke aft to attain and maintain attitude
- Releasing back pressure to lower the nose and increasing back pressure to raise the nose
- Increasing back pressure to flare for landing

Trim mechanisms can be useful in the event of an in-flight primary control failure. For example, if the linkage between the cabin and the elevator fails in flight, leaving the elevator free to weathervane in the wind, the trim tab can be used to raise or lower the elevator within limits. The trim tabs are not as effective as normal linkage control in conditions such as low airspeed, but they do have some positive effect—usually enough to bring about a safe landing.

If an elevator becomes jammed, resulting in a total loss of elevator control movement, various combinations of power and flap extension offer a limited amount of pitch control. A successful landing under these conditions, however, can be problematic.

## Landing Gear Malfunction

Once the pilot has confirmed that the landing gear has in fact malfunctioned and that one or more gear legs refuses to respond to the conventional or alternate methods of gear extension contained in the AFM/POH, a gear-up landing is considered inevitable. The pilot should select an airport with crash and rescue facilities, if possible. The pilot should not hesitate to request that emergency equipment is standing by.

When selecting a landing surface, the pilot should consider that a smooth, hard-surface runway usually causes less damage than a rough, unimproved grass strip. A hard surface does, however, create sparks that can ignite fuel. If the airport is so equipped, the pilot can request that the runway surface be foamed. The pilot should consider burning off excess fuel. This reduces landing speed and fire potential.

If the landing gear malfunction is limited to one main landing gear leg, the pilot should consume as much fuel from that side of the airplane as practicable, thereby reducing the weight of the wing on that side. The reduced weight makes it possible to delay the unsupported wing from contacting the surface during the landing roll until the last possible moment. Reduced impact speeds result in less damage.

If only one landing gear leg fails to extend, the pilot has the option of landing on the available gear legs or landing with all the gear legs retracted. Landing on only one main gear usually causes the airplane to veer strongly in the direction of the faulty gear leg after touchdown. If the landing runway is narrow and/or ditches and obstacles line the runway edge, maximum directional control after touchdown is a necessity. In this situation, a landing with all three gear retracted may be the safest course of action.

If the pilot elects to land with one main gear retracted (and the other main gear and nose gear down and locked), the landing should be made in a nose-high attitude with the wings level. As airspeed decays, the pilot should apply whatever aileron control is necessary to keep the unsupported wing airborne as long as possible. [Figure 18-7] Once the wing contacts the surface, the pilot can anticipate a strong yaw in that direction. The pilot should be prepared to use full opposite rudder and aggressive braking to maintain some degree of directional control.



**Figure 18-7.** *Landing with one main gear retracted.*

When landing with a retracted nose-wheel (and the main gear extended and locked), the pilot should hold the nose off the ground until almost full up-elevator has been applied. [Figure 18-8] The pilot should then release back pressure in such a manner that the nose settles slowly to the surface. Applying and holding full up-elevator results in the nose abruptly dropping to the surface as airspeed decays, possibly resulting in burrowing and/or additional damage. Brake pressure should not be applied during the landing roll unless absolutely necessary to avoid a collision with obstacles.





**Figure 18-8.** *Landing with nose-wheel retracted.*

If the landing occurs with only the nose gear extended, the initial contact should be made on the aft fuselage structure with a nose-high attitude. This procedure helps prevent porpoising and/or wheelbarrowing. The pilot should then allow the nose-wheel to gradually touchdown, using nose-wheel steering as necessary for directional control.

## **System Malfunctions**

### **Electrical System**

The loss of electrical power can deprive the pilot of numerous critical systems, and therefore should not be taken lightly even in day/visual flight rules (VFR) conditions. Most in-flight failures of the electrical system are located in the generator or alternator. Once the generator or alternator system goes off line, the electrical source in a typical light airplane is a battery. If a warning light or ammeter indicates the probability of an alternator or generator failure in an airplane with only one generating system, however, the pilot may have very little time available from the battery.

The rating of the airplane battery provides a clue as to how long it may last. With batteries, the higher the amperage load, the faster any available stored energy gets consumed. Thus, a 25-amp hour battery could produce 5 amps per hour for 5 hours, but if the load were increased to 10 amps, it might last only 2 hours. A 40-amp load might discharge the battery fully in about 10 or 15 minutes. Much depends on the battery condition at the time of the system failure. If the battery has been in service for a few years, its power may be reduced substantially because of internal resistance. Or if the system failure was not detected immediately, much of the stored energy may have already been used. It is essential, therefore, that the pilot immediately shed non-essential loads when the generating source fails. [Figure 18-9] The pilot should then plan to land at the nearest suitable airport.

What constitutes an “emergency” load following a generating system failure cannot be predetermined because the actual circumstances are always somewhat different—for example, whether the flight is VFR or instrument flight rules (IFR), conducted in day or at night, in clouds or in the clear. Distance to nearest suitable airport can also be a factor.

The pilot should remember that the electrically-powered (or electrically-selected) landing gear and flaps do not function properly on the power left in a partially-depleted battery. Landing gear and flap motors use power at rates much greater than most other types of electrical equipment. The result of selecting these motors on a partially-depleted battery may well result in an immediate total loss of electrical power.

| Electrical Loads for Light Single                                                                                                                                                       | Number of units | Total Amperes |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------|
| <b>A. Continuous Load</b>                                                                                                                                                               |                 |               |
| Pitot Heating (Operating)                                                                                                                                                               | 1               | 3.30          |
| Wingtip Lights                                                                                                                                                                          | 4               | 3.00          |
| Heater Igniter                                                                                                                                                                          | 1               | 1-20          |
| **Navigation Receivers                                                                                                                                                                  | 1-4             | 1-2 each      |
| **Communications Receivers                                                                                                                                                              | 1-2             | 1-2 each      |
| Fuel Indicator                                                                                                                                                                          | 1               | 0.40          |
| Instrument Lights (overhead)                                                                                                                                                            | 2               | 0.60          |
| Engine Indicator                                                                                                                                                                        | 1               | 0.30          |
| Compass Light                                                                                                                                                                           | 1               | 0.20          |
| Landing Gear Indicator                                                                                                                                                                  | 1               | 0.17          |
| Flap Indicator                                                                                                                                                                          | 1               | 0.17          |
| <b>B. Intermittent Load</b>                                                                                                                                                             |                 |               |
| Starter                                                                                                                                                                                 | 1               | 100.00        |
| Landing Lights                                                                                                                                                                          | 2               | 17.80         |
| Heater Blower Motor                                                                                                                                                                     | 1               | 14.00         |
| Flap Motor                                                                                                                                                                              | 1               | 13.00         |
| Landing Gear Motor                                                                                                                                                                      | 1               | 10.00         |
| Cigarette Lighter                                                                                                                                                                       | 1               | 7.50          |
| Transceiver (keyed)                                                                                                                                                                     | 1               | 5-7           |
| Fuel Boost Pump                                                                                                                                                                         | 1               | 2.00          |
| Cowl Flap Motor                                                                                                                                                                         | 1               | 1.00          |
| Stall Warning Horn                                                                                                                                                                      | 1               | 1.50          |
| ** Amperage for radios varies with equipment.<br>In general, the more recent the model, the less amperage required.<br>NOTE: Panel and indicator lights usually draw less than one amp. |                 |               |

**Figure 18-9.** *Electrical load for light single.*


If the pilot expects an imminent and complete in-flight loss of electrical power, the following steps should be taken:

- Shed all but the most necessary electrically-driven equipment.
- Understand that any loss of electrical power is critical in a small airplane—notify ATC of the situation immediately. Request radar vectors for a landing at the nearest suitable airport.
- If landing gear or flaps are electrically controlled or operated, plan the arrival well ahead of time. Expect to make a no-flap landing and anticipate a manual landing gear extension.

### Pitot-Static System

The source of the pressure for operating the airspeed indicator, the vertical speed indicator (VSI), and the altimeter is the pitot-static system. The major components of the pitot-static system are the impact pressure chamber and lines and the static pressure chamber and lines, each of which are subject to total or partial blockage by ice, dirt, and/or other foreign matter. Blockage of the pitot-static system adversely affects instrument operation. *[Figure 18-10]*

Partial static system blockage is insidious in that it may go unrecognized until a critical phase of flight. During takeoff, climb, and level-off at cruise altitude the altimeter, airspeed indicator, and VSI may operate normally. No indication of malfunction may be present until the airplane begins a descent.

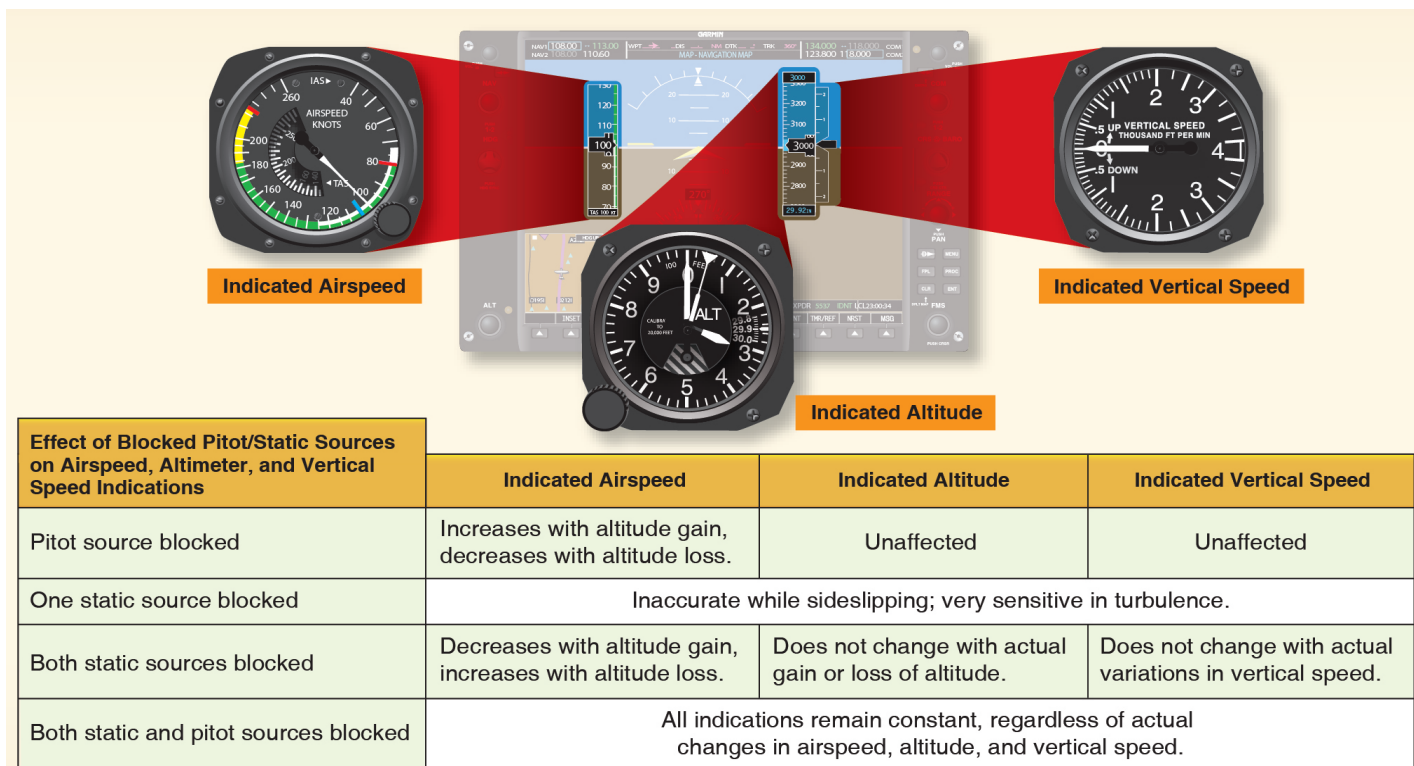

**Figure 18-10.** *Effects of blocked pitot-static sources.*

If the static reference system is severely restricted, but not entirely blocked, as the airplane descends, the static reference pressure at the instruments begins to lag behind the actual outside air pressure. While descending, the altimeter may indicate that the airplane is higher than actual because the obstruction slows the airflow from the static port to the altimeter. The VSI confirms the altimeter's information regarding rate of change because the reference pressure is not changing at the same rate as the outside air pressure. The airspeed indicator, unable to tell whether it is experiencing more airspeed pitot pressure or less static reference pressure, indicates a higher airspeed than actual. To the pilot, the instruments indicate that the airplane is too high, too fast, and descending at a rate much lower than desired.

If the pilot levels off and then begins a climb, the altitude indication may still lag. The VSI indicates that the airplane is not climbing as fast as actual. The indicated airspeed, however, may begin to decrease at an alarming rate. The least amount of pitch-up attitude may cause the airspeed needle to indicate dangerously near stall speed.

Managing a static system malfunction requires that the pilot know and understand the airplane's pitot-static system. If a system malfunction is suspected, the pilot should confirm it by opening the alternate static source. This should be done while the airplane is climbing or descending. If the instrument needles move significantly when this is done, a static pressure problem exists and the alternate source should be used during the remainder of the flight.

Failure of the pitot-static system may also have serious consequences for Electronic Flight Instrument Systems (EFIS). To satisfy the requirements of Title 14 of the Code of Federal Regulations (14 CFR) part 23, section 23.2615(b)(2), information essential for continued safe flight and landing will be available to the flightcrew in a timely manner after any single failure or probable combination of failures. However, many of the light aircraft equipped with glass displays typically share the same pitot-static inputs for the backup instrumentation. Since both systems are receiving the same input signals, both could fail if affected by obstructed or blocked pitot tubes and static ports and create a difficult situation for a pilot flying in IMC. Some manufacturers combine both the air data computer (ADC) and the attitude and heading reference system (AHRS) functions so that a blockage of the input system may also affect the attitude display.

With conventional instrumentation, the design and operation are similar regardless of aircraft or manufacturer. By comparing information between the six conventional instruments, pilots are able to diagnose common failure modes. Instrument failure indications of conventional instruments and electronic flight displays may be entirely different, and electronic systems failure indications are not standardized. With the wide diversity in system design of glass displays, the primary display and the backup display may respond differently to any interruption of data input, and both displays may function differently than conventional instruments under the same conditions.

It is imperative for pilots to obtain equipment-specific information in reference to both the aircraft and the avionics that fully prepare them to interpret and properly respond to equipment malfunctions of electronic flight instrument displays. Rapidly changing equipment, complex systems, and the difficulty or inability to simulate failure modes and functions can impose training limitations. Pilots still should be able to respond to equipment malfunctions in a timely manner without impairing other critical flight tasks should the need arise.

## Abnormal Engine Instrument Indication

The AFM/POH for the specific airplane contains information that should be followed in the event of any abnormal engine instrument indications. The table shown in *Figure 18-11* offers generic information on some of the more commonly experienced in-flight abnormal engine instrument indications, their possible causes, and corrective actions.

| Malfunction                                                               | Probable Cause                                                                                  | Corrective Action                                                                                                              |
|---------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Loss of rpm during cruise flight (non-altitude engines)                   | Carburetor or induction icing or air filter clogging                                            | Apply carburetor heat. If dirty filter is suspected and non-filtered air is available, switch selector to unfiltered position. |
| Loss of manifold pressure during cruise flight                            | Same as above                                                                                   | Same as above.                                                                                                                 |
|                                                                           | Turbocharger failure                                                                            | Possible exhaust leak. Shut down engine or use lowest practicable power setting. Land as soon as possible.                     |
| Gain of manifold pressure during cruise flight                            | Throttle has opened, propeller control has decreased rpm, or improper method of power reduction | Readjust throttle and tighten friction lock. Reduce manifold pressure prior to reducing rpm.                                   |
| High oil temperature                                                      | Oil congealed in cooler                                                                         | Reduce power. Land. Preheat engine.                                                                                            |
|                                                                           | Inadequate engine cooling                                                                       | Reduce power. Increase airspeed.                                                                                               |
|                                                                           | Detonation or preignition                                                                       | Observe cylinder head temperatures for high reading. Reduce manifold pressure. Enrich mixture.                                 |
|                                                                           | Forthcoming internal engine failure                                                             | Land as soon as possible or feather propeller and stop engine.                                                                 |
|                                                                           | Defective thermostatic oil cooler control                                                       | Land as soon as possible. Consult maintenance personnel.                                                                       |
| Low oil temperature                                                       | Engine not warmed up to operating temperature                                                   | Warm engine in prescribed manner.                                                                                              |
| High oil pressure                                                         | Cold oil                                                                                        | Same as above.                                                                                                                 |
|                                                                           | Possible internal plugging                                                                      | Reduce power. Land as soon as possible.                                                                                        |
| Low oil pressure                                                          | Broken pressure relief valve                                                                    | Land as soon as possible or feather propeller and stop engine.                                                                 |
|                                                                           | Insufficient oil                                                                                | Same as above.                                                                                                                 |
|                                                                           | Burned out bearings                                                                             | Same as above.                                                                                                                 |
| Fluctuating oil pressure                                                  | Low oil supply, loose oil lines, defective pressure relief valve                                | Same as above.                                                                                                                 |
| High cylinder head temperature                                            | Improper cowl flap adjustment                                                                   | Adjust cowl flaps.                                                                                                             |
|                                                                           | Insufficient airspeed for cooling                                                               | Increase airspeed.                                                                                                             |
|                                                                           | Improper mixture adjustment                                                                     | Adjust mixture.                                                                                                                |
|                                                                           | Detonation or preignition                                                                       | Reduce power, enrich mixture, increase cooling airflow.                                                                        |
| Low cylinder head temperature                                             | Excessive cowl flap opening                                                                     | Adjust cowl flaps.                                                                                                             |
|                                                                           | Excessively rich mixture                                                                        | Adjust mixture control.                                                                                                        |
|                                                                           | Extended glides without clearing engine                                                         | Clear engine long enough to keep temperatures at minimum range.                                                                |
| Ammeter indicating discharge                                              | Alternator or generator failure                                                                 | Shed unnecessary electrical load. Land as soon as practicable.                                                                 |
| Load meter indicating zero                                                | Same as above                                                                                   | Same as above                                                                                                                  |
| Surging rpm and overspeeding                                              | Defective propeller                                                                             | Adjust propeller rpm.                                                                                                          |
|                                                                           | Defective engine                                                                                | Consult maintenance.                                                                                                           |
|                                                                           | Defective propeller governor                                                                    | Adjust propeller control. Attempt to restore normal operation.                                                                 |
|                                                                           | Defective tachometer                                                                            | Consult maintenance.                                                                                                           |
|                                                                           | Improper mixture setting                                                                        | Readjust mixture for smooth operation.                                                                                         |
| Loss of airspeed in cruise flight with manifold pressure and rpm constant | Possible loss of one or more cylinders                                                          | Land as soon as possible.                                                                                                      |
| Rough running engine                                                      | Improper mixture control setting                                                                | Adjust mixture for smooth operation                                                                                            |
|                                                                           | Defective ignition or valves                                                                    | Consult maintenance personnel.                                                                                                 |
|                                                                           | Detonation or preignition                                                                       | Reduce power, enrich mixture, open cowl flaps to reduce cylinder head temp. Land as soon as practicable.                       |
|                                                                           | Induction air leak                                                                              | Reduce power. Consult maintenance.                                                                                             |
|                                                                           | Plugged fuel nozzle (fuel injection)                                                            | Same as above.                                                                                                                 |
|                                                                           | Excessive fuel pressure or fuel flow                                                            | Lean mixture control.                                                                                                          |
| Loss of fuel pressure                                                     | Engine-driven pump failure                                                                      | Turn on boost pumps.                                                                                                           |
|                                                                           | No fuel                                                                                         | Switch tanks, turn on fuel.                                                                                                    |

**Figure 18-11.** Commonly experienced in-flight abnormal engine instrument indications, their possible causes, and corrective actions.



## Door Opening In-Flight

In most instances, the occurrence of an inadvertent door opening is not of great concern to the safety of a flight, but rather, the pilot's reaction at the moment the incident happens. A door opening in flight may be accompanied by a sudden loud noise, sustained noise level, and possible vibration or buffeting. If a pilot allows himself or herself to become distracted to the point where attention is focused on the open door rather than maintaining control of the airplane, loss of control may result even though disruption of airflow by the door is minimal.

In the event of an inadvertent door opening in flight or on takeoff, the pilot should adhere to the following:

- Concentrate on flying the airplane. Particularly in light single and twin-engine airplanes; a cabin door that opens in flight seldom if ever compromises the airplane's ability to fly. There may be some handling effects, such as roll and/or yaw, but in most instances these can be easily overcome.
- If the door opens after lift-off, do not rush to land. Climb to normal traffic pattern altitude, fly a normal traffic pattern, and make a normal landing.
- Do not release the seat belt and shoulder harness in an attempt to reach the door. Leave the door alone. Land as soon as practicable, and close the door once safely on the ground.
- Remember that most doors do not stay wide open. They usually bang open and then settle partly closed. A slip towards the door may cause it to open wider; a slip away from the door may push it closed.
- Do not panic. Try to ignore the unfamiliar noise and vibration. Also, do not rush. Attempting to get the airplane on the ground as quickly as possible may result in steep turns at low altitude.
- Complete all items on the landing checklist.
- Remember that accidents are almost never caused by an open door. Rather, an open door accident is caused by the pilot's distraction or failure to maintain control of the airplane.

## Inadvertent VFR Flight Into IMC

It is beyond the scope of this handbook to incorporate a course of training in basic attitude instrument flying. This information is contained in the Instrument Flying Handbook (FAA-H-8083-15). Certain pilot certificates and/or associated ratings require training in instrument flying and a demonstration of specific instrument flying tasks on the practical test.

Pilots and flight instructors should refer to the Instrument Flying Handbook (FAA-H-8083-15) for guidance in the performance of these tasks and to the appropriate airman certification standards (ACS) for information on the evaluation of tasks performed for the particular certificate level and/or rating. The pilot should remember, however, that unless these tasks are practiced on a continuing and regular basis, skill erosion begins almost immediately. In a very short time, the pilot's assumed level of confidence is much higher than the performance he or she is actually able to demonstrate should the need arise.

Accident statistics show that the pilot who has not been trained in attitude instrument flying, or one whose instrument skills have eroded, lose control of the airplane in about 10 minutes once forced to rely solely on instrument references. The purpose of this section is to provide guidance on practical emergency measures to maintain airplane control for a limited period of time in the event a VFR pilot encounters instrument meteorological conditions (IMC). The main goal is not precision instrument flying; rather, it is to help the VFR pilot keep the airplane under adequate control until suitable visual references are regained.

The first steps necessary for surviving an encounter with IMC by a VFR pilot are as follows:

- Recognition and acceptance of the seriousness of the situation and the need for immediate remedial action
- Maintaining control of the airplane
- Obtaining the appropriate assistance to get the airplane safely on the ground

### Recognition

Anytime a VFR pilot is unable to maintain airplane attitude control by reference to the natural horizon, the condition is considered to be IMC regardless of the circumstances or the prevailing weather conditions. Whether the cause is inadvertent or intentional, the VFR pilot is, in effect, in IMC if unable to navigate or establish geographical position by visual reference to landmarks on the surface. These situations should be accepted by the pilot involved as a genuine emergency requiring appropriate action.

Pilots should understand that unless they are trained, qualified, and current in the control of an airplane solely by reference to flight instruments, they will be unable to do so for any length of time. Many hours of VFR flying using the attitude indicator as a reference for airplane control may lull pilots into a false sense of security based on an overestimation of their personal ability to control the airplane solely by instrument references. In VFR conditions, even though the pilot believes the instrument references will be easy to use, the pilot also receives an overview of the natural horizon and may subconsciously rely on it more than the attitude indicator. If the natural horizon were to suddenly disappear, the untrained instrument pilot would be subject to vertigo, spatial disorientation, and inevitable control loss.

## **Maintaining Airplane Control**

Once the pilot recognizes and accepts the situation, he or she should understand that the only way to control the airplane safely is by using and trusting the flight instruments. Attempts to control the airplane partially by reference to flight instruments while searching outside of the airplane for visual confirmation of the information provided by those instruments results in inadequate airplane control. This may be followed by spatial disorientation and complete control loss.

The most important point to be stressed is that the pilot should not panic. The task at hand may seem overwhelming, and the situation may be compounded by extreme apprehension. However, the pilot should make a conscious effort to relax. The pilot needs to understand the most important concern—in fact the only concern at this point—is to keep the wings level. An uncontrolled turn or bank usually leads to difficulty in achieving the objectives of any desired flight condition, but good bank control has the effect of making pitch control much easier.

The pilot should remember that a person cannot feel control pressures with a tight grip on the controls. Relaxing and learning to “control with the eyes and the brain,” instead of only the muscles usually takes considerable conscious effort.

The pilot needs to believe what the flight instruments show about the airplane’s attitude regardless of what the natural senses tell. The vestibular sense (motion sensing by the inner ear) can and will confuse the pilot. Because of inertia, the sensory areas of the inner ear cannot detect slight changes in airplane attitude, nor can they accurately sense attitude changes that occur at a uniform rate over a period of time. On the other hand, false sensations are often generated, leading the pilot to believe the attitude of the airplane has changed when, in fact, it has not. These false sensations result in the pilot experiencing spatial disorientation.

## **Attitude Control**

An airplane is, by design, an inherently stable platform and, except in turbulent air, maintains approximately straight-and-level flight if properly trimmed and left alone. It is designed to maintain a state of equilibrium in pitch, roll, and yaw. The pilot should be aware, however, that a change about one axis affects the stability of the others. The typical light airplane exhibits a good deal of stability in the yaw axis, slightly less in the pitch axis, and even lesser still in the roll axis. The key to emergency airplane attitude control, therefore, is to:

- Trim the airplane with the elevator trim so that it maintains hands-off level flight at cruise airspeed.
- Resist the tendency to over-control the airplane. Fly the attitude indicator with fingertip control. No attitude changes should be made unless the flight instruments indicate a definite need for a change.
- Make all attitude changes smooth and small, yet with positive pressure. Remember that a small change as indicated on the horizon bar corresponds to a proportionately much larger change in actual airplane attitude.
- Make use of any available aid in attitude control, such as autopilot or wing leveler.

The primary instrument for attitude control is the attitude indicator. *[Figure 18-12]* Once the airplane is trimmed so that it maintains hands-off level flight at cruise airspeed, that airspeed need not vary until the airplane is slowed for landing. All turns, climbs, and descents can and should be made at this airspeed. Straight flight is maintained by keeping the wings level using “fingertip pressure” on the control wheel. Any pitch attitude change should be made by using no more than one bar width up or down.

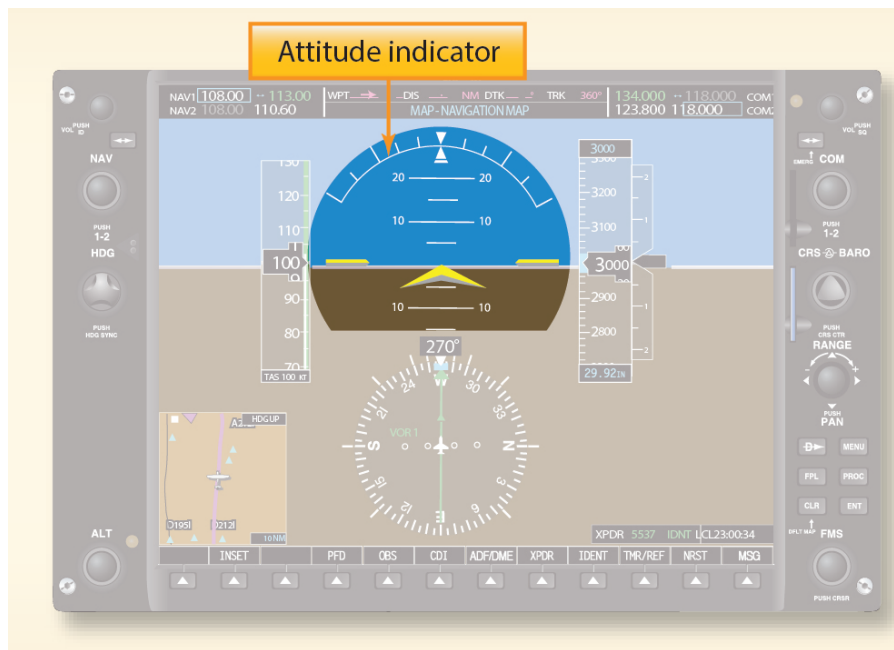


Figure 18-12. Attitude indicator.

## Turns

Turns are perhaps the most potentially dangerous maneuver for the untrained instrument pilot for two reasons:

- The normal tendency of the pilot to over-control, leading to steep banks and the possibility of a “graveyard spiral.”
- The inability of the pilot to cope with the instability resulting from the turn.

When a turn is to be made, the pilot should anticipate and cope with the relative instability of the roll axis. The smallest practical bank angle should be used—in any case no more than 10° bank angle. [Figure 18-13] A shallow bank takes very little vertical lift from the wings resulting in little if any deviation in altitude. It may be helpful to turn a few degrees and then return to level flight if a large change in heading is necessary. Repeat the process until the desired heading is reached. This process may relieve the progressive overbanking that often results from prolonged turns.

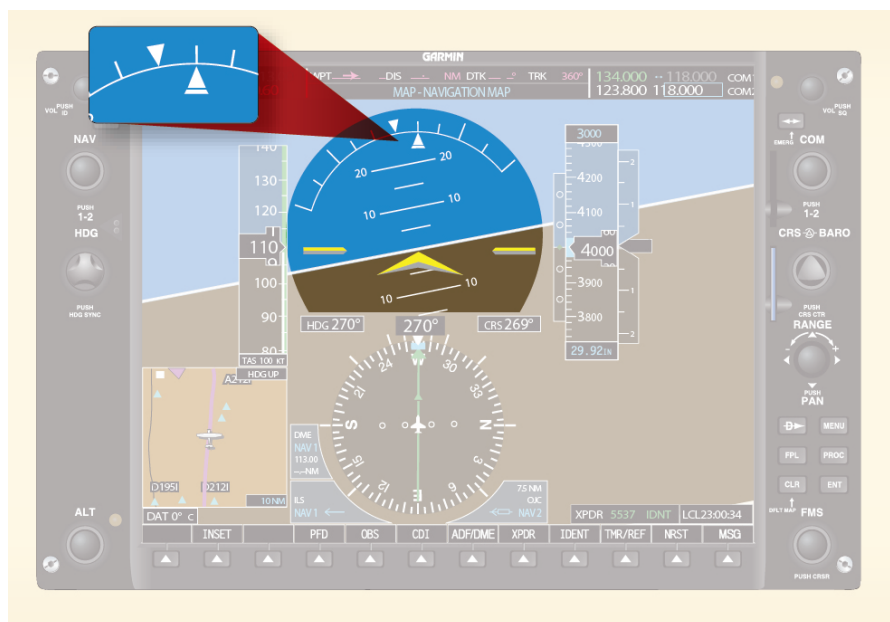


Figure 18-13. Level turn.

## Climbs

If a climb is necessary, the pilot should raise the miniature airplane on the attitude indicator no more than one bar width and apply power. [Figure 18-14] The pilot should not attempt to attain a specific climb speed but accept whatever speed results. The objective is to deviate as little as possible from level flight attitude in order to disturb the airplane's equilibrium as little as possible. If the airplane is properly trimmed, it assumes a nose-up attitude on its own commensurate with the amount of power applied. Torque and P-factor cause the airplane to have a tendency to bank and turn to the left. This should be anticipated and compensated for. If the initial power application results in an inadequate rate of climb, power should be increased in increments of 100 rpm or 1 inch of manifold pressure until the desired rate of climb is attained. Maximum available power is seldom necessary. The more power that is used, the more the airplane wants to bank and turn to the left. Resuming level flight is accomplished by first decreasing pitch attitude to level on the attitude indicator using slow but deliberate pressure, allowing airspeed to increase to near cruise value and then decreasing power.

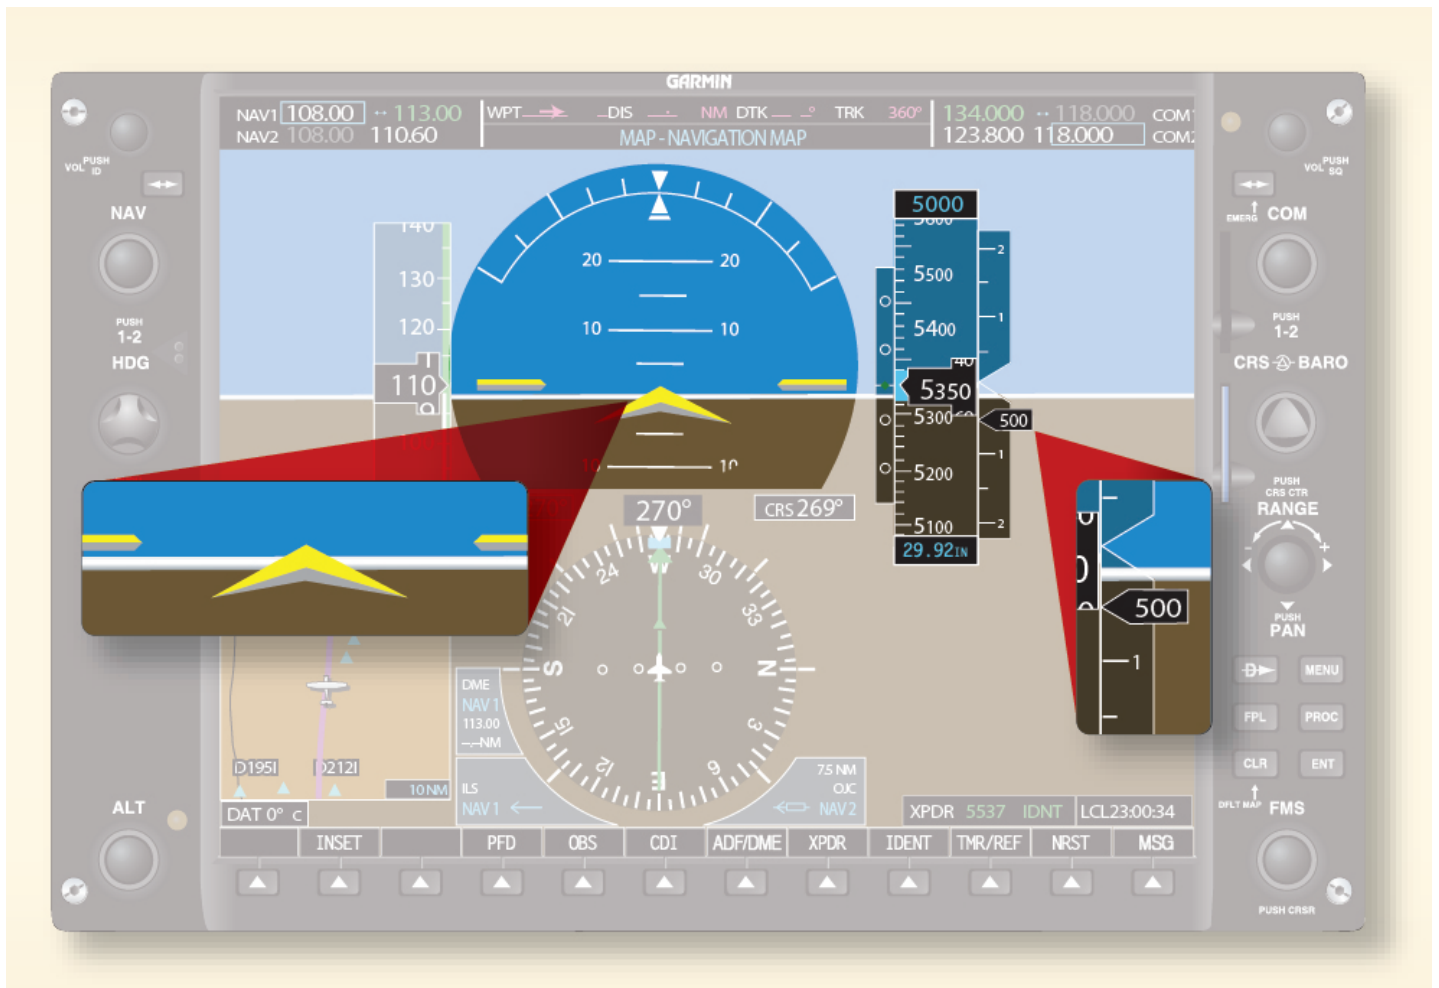


Figure 18-14. Level climb.

## Descents

Descents are very much the opposite of the climb procedure if the airplane is properly trimmed for hands-off straight-and-level flight. In this configuration, the airplane requires a certain amount of thrust to maintain altitude. The pitch attitude is controlling the airspeed. The engine power, therefore, (translated into thrust by the propeller) is maintaining the selected altitude. Following a power reduction, however slight, there is an almost imperceptible decrease in airspeed. However, even a slight change in speed results in less down load on the tail, whereupon the designed nose heaviness of the airplane causes it to pitch down just enough to maintain the airspeed for which it was trimmed. The airplane then descends at a rate directly proportionate to the amount of thrust that has been removed. Power reductions should be made in increments of 100 rpm or 1 inch of manifold pressure and the resulting rate of descent should never exceed 500 fpm. The wings should be held level on the attitude indicator, and the pitch attitude should not exceed one bar width below level. [Figure 18-15]



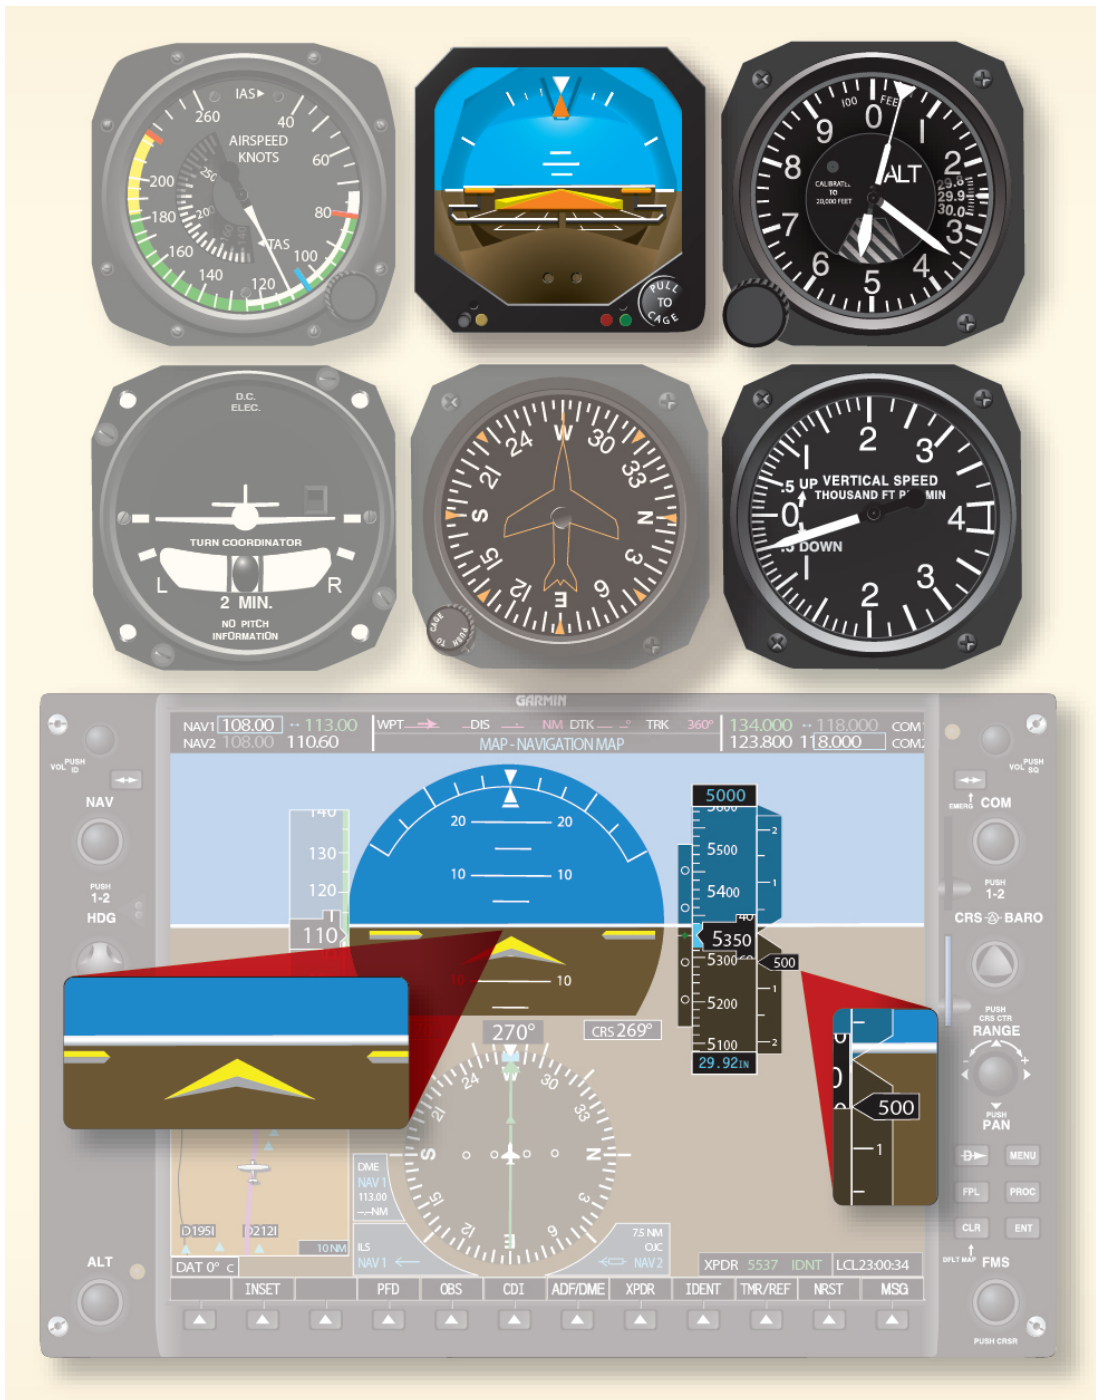


Figure 18-15. Level descent.

### Combined Maneuvers

Combined maneuvers, such as climbing or descending turns, should be avoided if at all possible by an untrained instrument pilot. Combining maneuvers only compounds the problems encountered in individual maneuvers and increases the risk of control loss. The objective is to keep the airplane under control by maintaining as much of the airplane's natural equilibrium as possible. Deviating as little as possible from straight-and-level flight attitude makes this much easier.

When being assisted by ATC, the pilot may detect a sense of urgency while being directed to change heading and/or altitude. This sense of urgency reflects a normal concern for safety on the part of the controller. Nevertheless, the pilot should not let this prompting lead to rushing into a maneuver that could result in loss of control. It's reasonable to ask the controller to slow down, if this becomes an issue.

## **Transition to Visual Flight**

One of the most difficult tasks a trained and qualified instrument pilot contends with is the transition from instrument to visual flight prior to landing. For the untrained instrument pilot, these difficulties are magnified.

The difficulties center around acclimatization and orientation. On an instrument approach, the trained instrument pilot prepares in advance for the transition to visual flight. The pilot has a mental picture of what to expect when the transition to visual flight is made and will quickly acclimate to the new environment. Geographical orientation also begins before the transition, as the pilot visualizes where the airplane is in relation to the airport/runway.

In an ideal situation, the transition to visual flight is made with ample time, at a sufficient altitude above terrain, and to visibility conditions sufficient to accommodate acclimatization and geographical orientation. This, however, is not always the case. The untrained instrument pilot may find the visibility still limited, the terrain completely unfamiliar, and altitude above terrain such that a “normal” airport traffic pattern and landing approach is not possible. Additionally, the pilot is most likely under considerable self-induced psychological pressure to get the airplane on the ground. The pilot should take this into account and, if possible, allow time to become acclimatized and geographically oriented before attempting an approach and landing, even if it means flying straight and level for a time or circling the airport. This is especially true at night.

## **Emergency Response Systems**

Airplanes may have installed systems that provide alternatives in certain emergency situations. For example, ballistic parachute systems, if installed, may be deployed in an emergency allowing an airplane to descend slowly enough toward the ground such that occupants usually survive the resulting impact with minor or no injuries. Airplanes may also have an Emergency Autoland (EAL) system, which can take over control of the aircraft when necessary for a safe outcome.

### **Ballistic Parachutes**

Deployment of an airplane ballistic parachute system results in the loss of the airframe, but deploying such systems within an acceptable flight regime prevents injuries and saves lives. Pilots need to understand and follow the procedures for arming and disarming these systems before and after flight, and understand the conditions under which the system would be deployed. For example, a catastrophic loss of controllability due to a collision or mechanical failure, actual loss of control, or pilot incapacitation would qualify. Pilots should brief passengers with access to any deployment mechanism regarding the conditions for a safe deployment. Generally, the passenger would deploy the system only if the pilot were incapacitated. At a minimum, the pilot should also brief the passengers regarding the basic sequence of steps for deployment. Pilots should study the information provided by manufacturers and suppliers of these systems and follow the guidance provided.

The system design may include airplane components designed to absorb the forces of vertical impact. The design of landing gear and seats maximize the protection afforded to the occupants and extend the time over which impact forces are absorbed. Once on the ground, there are hazards associated with a deployed parachute and the effect of surface winds, and the occupants should know the procedures for evacuation.

### **Autoland**

If the EAL senses erratic flying, it stabilizes the aircraft, and checks for pilot responsiveness. Without further input, the EAL initiates an emergency descent. Without pilot responsiveness after an emergency descent, EAL initiates the process for an automated landing. The system also allows for manual activation by a pilot or a passenger.

Once activated, the EAL system transmits automated radio broadcasts on the aircraft’s last selected frequency and on Guard (121.5 MHz) to alert controllers or pilots in the area of the EAL aircraft’s imminent arrival to the selected runway. The system repeatedly transmits the call sign and intention to divert to a particular airport and runway using a recognizable non-human synthesized voice. Additionally, EAL sets the transponder to squawk 7700 to indicate an emergency. After the initial broadcast, the system pauses for 25 seconds to allow air traffic control (ATC) to communicate with potential conflicting traffic. Once the EAL aircraft is within 12 miles of the selected runway and at or below 12,000 feet MSL, it broadcasts on the tower frequency or Common Traffic Advisory Frequency (CTAF), and continues to broadcast its position via ADS-B. It announces its call sign, “pilot incapacitation,” its position relative to the destination airport, gives the airport and airport identifier, and the time to landing on a specific runway at that airport. The system makes a similar “one-minute out” broadcast prior to landing.

The EAL system selects a suitable landing airfield based on several factors. These factors include weather, wind, runway length, and towered/non-towered airport status. EAL only considers airports with an area navigation (RNAV) or Global Positioning System (GPS) approach, selects towered airports over non-towered airports where possible, and uses runway requirements that depend on the aircraft type. EAL systems also utilize obstacle and a terrain databases. If the system loses GPS coverage, the airplane continues straight flight without attempting to land until GPS coverage resumes.

Currently EAL system capabilities do not include detecting and avoiding other aircraft; receiving or reacting to ATC instructions or Notices to Airmen (NOTAMs); avoiding military operations areas (MOAs), special use airspace (SUA), Restricted Areas, or Temporary Flight Restrictions (TFRs); or turning on aircraft lights.

## **Chapter Summary**

This chapter provided general guidance and recommended procedures that may apply to light single-engine airplanes involved in certain emergency situations. The information presented is intended to enhance the general knowledge of emergency operations with the clear understanding that the manufacturer's recommended emergency procedures take precedence.

Information was provided concerning failure of the pitot-static system in aircraft with EFIS. The redundancy of backup systems for IFR flight may be less than desired if both the primary and backup instrumentation may receive signal data input from the same pitot-static source. The failure indications of EFIS may be entirely different from conventional instruments making recognition of system malfunction much more difficult for the pilot. Lack of system standardization compounds the problem making equipment specific information and knowledge an important asset when analyzing electronic display malfunctions. The inability to simulate certain failure modes during training and evaluation could make the pilot less prepared for an actual emergency. As electronic avionics become more advanced, the training and proficiency needed to safely operate these systems should receive careful analysis.

# Airplane Flying Handbook (FAA-H-8083-3A)

## Glossary

### Numbers and Symbols

**14 CFR.** (Title 14 of the Code of Federal Regulations. Federal regulations pertaining to aviation activity. Previously known as Federal Aviation Regulations.

**100-Hour Inspection.** An inspection, identical in scope to an annual inspection. Must be conducted every 100 hours of flight on aircraft of under 12,500 pounds that are used for hire.

### A

**Absolute altitude.** The vertical distance of an airplane above the terrain or above ground level (AGL).

**Absolute ceiling.** The altitude at which a climb is no longer possible.

**Accelerate-go distance.** The distance required to accelerate to  $V_1$  with all engines at takeoff power, experience an engine failure at  $V_1$  and continue the takeoff on the remaining engine(s). The runway required includes the distance required to climb to 35 feet by which time  $V_2$  speed must be attained.

**Accelerate-stop distance.** The distance required to accelerate to  $V_1$  with all engines at takeoff power, experience an engine failure at  $V_1$ , and abort the takeoff and bring the airplane to a stop using braking action only (use of thrust reversing is not considered).

**Acceleration.** Force involved in overcoming inertia, and which may be defined as a change in velocity per unit of time.

**Accessories.** Components that are used with an engine, but are not a part of the engine itself. Units such as magnetos, carburetors, generators, and fuel pumps are commonly installed engine accessories.

**Adjustable stabilizer.** A stabilizer that can be adjusted in flight to trim the airplane, thereby allowing the airplane to fly hands-off at any given airspeed.

**Adverse yaw.** A condition of flight in which the nose of an airplane tends to yaw toward the outside of the turn. This is caused by the higher induced drag on the outside wing, which is also producing more lift. Induced drag is a by-product of the lift associated with the outside wing.

**Aerodynamic ceiling.** The point (altitude) at which, as the indicated airspeed decreases with altitude, it progressively merges with the low speed buffet boundary where pre-stall buffet occurs for the airplane at a load factor of 1.0 G.

**Aerodynamics.** The science of the action of air on an object, and with the motion of air on other gases. Aerodynamics deals with the production of lift by the aircraft, the relative wind, and the atmosphere.

**Ailerons.** Primary flight control surfaces mounted on the trailing edge of an airplane wing, near the tip. Ailerons control roll about the longitudinal axis.

**Air start.** The act or instance of starting an aircraft's engine while in flight, especially a jet engine after flameout.

**Aircraft energy management.** The process of planning, monitoring and controlling altitude and airspeed in relation to the airplane's energy state. Note that this definition is concerned with managing mechanical energy (altitude and airspeed) and addresses the safety (flight control) side of energy management. It does not address the efficiency (aircraft performance) side of energy management, which is concerned with how efficiently the engine generates mechanical energy from fuel and how efficiently the airframe spends that energy in flight.

**Aircraft logbooks.** Journals containing a record of total operating time, repairs, alterations or inspections performed, and all Airworthiness Directive (AD) notes complied with. A maintenance logbook should be kept for the airframe, each engine, and each propeller.

**Airfoil.** An airfoil is any surface, such as a wing, propeller, rudder, or even a trim tab, which provides aerodynamic force when it interacts with a moving stream of air.

**Airmanship.** A sound acquaintance with the principles of flight, the ability to operate an airplane with competence and precision both on the ground and in the air, and the exercise of sound judgment that results in optimal operational safety and efficiency.

**Airplane Flight Manual (AFM).** A document developed by the airplane manufacturer and approved by the Federal Aviation Administration (FAA). It is specific to a particular make and model airplane by serial number and it contains operating procedures and limitations.

**Airplane Owner/Information Manual.** A document developed by the airplane manufacturer containing general information about the make and model of an airplane. The airplane owner's manual is not FAA-approved and is not specific to a particular serial numbered airplane. This manual is not kept current, and therefore cannot be substituted for the AFM/POH.

**Airworthiness Certificate.** A certificate issued by the FAA to all aircraft that have been proven to meet the minimum standards set down by the Code of Federal Regulations.



**Airworthiness Directive.** A regulatory notice sent out by the FAA to the registered owner of an aircraft informing the owner of a condition that prevents the aircraft from continuing to meet its conditions for airworthiness. Airworthiness Directives (AD) must be complied with within the required time limit, and the fact of compliance, the date of compliance, and the method of compliance must be recorded in the aircraft's maintenance records.

**Airworthiness.** A condition in which the aircraft conforms to its type certificated design including supplemental type certificates and field-approved alterations. The aircraft must also be in a condition for safe flight as determined by annual, 100-hour, preflight and any other required inspections.

**Alpha mode of operation.** The operation of a turboprop engine that includes all of the flight operations, from takeoff to landing. Alpha operation is typically between 95 percent to 100 percent of the engine operating speed.

**Alternate air.** A device which opens, either automatically or manually, to allow induction airflow to continue should the primary induction air opening become blocked.

**Alternate static source.** A manual port that when opened allows the pitot static instruments to sense static pressure from an alternate location should the primary static port become blocked.

**Alternator/generator.** A device that uses engine power to generate electrical power.

**Altimeter.** A flight instrument that indicates altitude by sensing pressure changes.

**Altitude (AGL).** The actual height above ground level (AGL) at which the aircraft is flying.

**Altitude (MSL).** The actual height above mean sea level (MSL) at which the aircraft is flying.

**Altitude chamber.** A device that simulates high altitude conditions by reducing the interior pressure. The occupants will suffer from the same physiological conditions as flight at high altitude in an unpressurized aircraft.

**Altitude engine.** A reciprocating aircraft engine having a rated takeoff power that is producible from sea level to an established higher altitude.

**Angle of attack.** The acute angle between the chord line of the airfoil and the direction of the relative wind.

**Angle of incidence.** The angle formed by the chord line of the wing and a line parallel to the longitudinal axis of the airplane.

**Annual inspection.** Except as provided in regulation, no person may operate an aircraft unless, within the preceding 12 calendar months, it has had an annual inspection, per 14 CFR part 91, section 91.409(a). This inspection is normally performed every 12 calendar months by an A&P technician holding an Inspection Authorization (14 CFR part 65, section 65.95(a)(2)).

**Anti-icing.** The prevention of the formation of ice on a surface. Ice may be prevented by using heat or by covering the surface with a chemical that prevents water from reaching the surface. Anti-icing should not be confused with deicing, which is the removal of ice after it has formed on the surface.

**Attitude indicator.** An instrument which uses an artificial horizon and miniature airplane to depict the position of the airplane in relation to the true horizon. The attitude indicator senses roll as well as pitch, which is the up and down movement of the airplane's nose.

**Attitude.** The position of an aircraft as determined by the relationship of its axes and a reference, usually the earth's horizon.

**Autokinesis.** This is caused by staring at a single point of light against a dark background for more than a few seconds. After a few moments, the light appears to move on its own.

**Autopilot.** An automatic flight control system which keeps an aircraft in level flight or on a set course. Automatic pilots can be directed by the pilot, or they may be coupled to a radio navigation signal.

**Axes of an aircraft.** Three imaginary lines that pass through an aircraft's center of gravity. The axes can be considered as imaginary axes around which the aircraft turns. The three axes pass through the center of gravity at 90° angles to each other. The axis from nose to tail is the longitudinal axis, the axis that passes from wingtip to wingtip is the lateral axis, and the axis that passes vertically through the center of gravity is the vertical axis.

**Axial flow compressor.** A type of compressor used in a turbine engine in which the airflow through the compressor is essentially linear. An axial-flow compressor is made up of several stages of alternate rotors and stators. The compressor ratio is determined by the decrease in area of the succeeding stages.

## **B**

**Back side of the power curve.** Flight regime in which flight at a higher airspeed requires a lower power setting and a lower airspeed requires a higher power setting in order to maintain altitude.

**Balked landing.** A go-around.

**Ballast.** Removable or permanently installed weight in an aircraft used to bring the center of gravity into the allowable range.

**Balloon.** The result of a too aggressive flare during landing causing the aircraft to climb.

**Basic empty weight (GAMA).** Basic empty weight includes the standard empty weight plus optional and special equipment that has been installed.

**Best angle of climb ( $V_X$ ).** The speed at which the aircraft will produce the most gain in altitude in a given distance.

**Best glide.** The airspeed in which the aircraft glides the furthest for the least altitude lost when in non-powered flight.

**Best rate of climb ( $V_Y$ ).** The speed at which the aircraft will produce the most gain in altitude in the least amount of time.

**Blade face.** The flat portion of a propeller blade, resembling the bottom portion of an airfoil.

**Bleed air.** Compressed air tapped from the compressor stages of a turbine engine by use of ducts and tubing. Bleed air can be used for deice, anti-ice, cabin pressurization, heating, and cooling systems.

**Bleed valve.** In a turbine engine, a flapper valve, a pop off valve, or a bleed band designed to bleed off a portion of the compressor air to the atmosphere. Used to maintain blade angle of attack and provide stall-free engine acceleration and deceleration.

**Boost pump.** An electrically driven fuel pump, usually of the centrifugal type, located in one of the fuel tanks. It is used to provide fuel to the engine for starting and providing fuel pressure in the event of failure of the engine driven pump. It also pressurizes the fuel lines to prevent vapor lock.

**Buffeting.** The beating of an aerodynamic structure or surface by unsteady flow, gusts, etc.; the irregular shaking or oscillation of a vehicle component owing to turbulent air or separated flow.

**Bus bar.** An electrical power distribution point to which several circuits may be connected. It is often a solid metal strip having a number of terminals installed on it.

**Bus tie.** A switch that connects two or more bus bars. It is usually used when one generator fails and power is lost to its bus. By closing the switch, the operating generator powers both buses.

**Bypass air.** The part of a turbofan's induction air that bypasses the engine core.

**Bypass ratio.** The ratio of the mass airflow in pounds per second through the fan section of a turbofan engine to the mass airflow that passes through the gas generator portion of the engine. Or, the ratio between fan mass airflow (lb/sec.) and core engine mass airflow (lb/sec.).

## C

**Cabin pressurization.** A condition where pressurized air is forced into the cabin simulating pressure conditions at a much lower altitude and increasing the aircraft occupants comfort.

**Calibrated airspeed (CAS).** Indicated airspeed corrected for installation error and instrument error. Although manufacturers attempt to keep airspeed errors to a minimum, it is not possible to eliminate all errors throughout the airspeed operating range. At certain airspeeds and with certain flap settings, the installation and instrument errors may total several knots. This error is generally greatest at low airspeeds. In the cruising and higher airspeed ranges, indicated airspeed and calibrated airspeed are approximately the same. Refer to the airspeed calibration chart to correct for possible airspeed errors.

**Cambered.** The camber of an airfoil is the characteristic curve of its upper and lower surfaces. The upper camber is more pronounced, while the lower camber is comparatively flat. This causes the velocity of the airflow immediately above the wing to be much higher than that below the wing.

**Carburetor ice.** Ice that forms inside the carburetor due to the temperature drop caused by the vaporization of the fuel. Induction system icing is an operational hazard because it can cut off the flow of the fuel/air charge or vary the fuel/air ratio.

**Carburetor.** 1. Pressure: A hydromechanical device employing a closed feed system from the fuel pump to the discharge nozzle. It meters fuel through fixed jets according to the mass airflow through the throttle body and discharges it under a positive pressure. Pressure carburetors are distinctly different from float-type carburetors, as they do not incorporate a vented float chamber or suction pickup from a discharge nozzle located in the venturi tube. 2. Float-type: Consists essentially of a main air passage through which the engine draws its supply of air, a mechanism to control the quantity of fuel discharged in relation to the flow of air, and a means of regulating the quantity of fuel/air mixture delivered to the engine cylinders.

**Cascade reverser.** A thrust reverser normally found on turbofan engines in which a blocker door and a series of cascade vanes are used to redirect exhaust gases in a forward direction.

**Center of gravity (CG).** The point at which an airplane would balance if it were possible to suspend it at that point. It is the mass center of the airplane, or the theoretical point at which the entire weight of the airplane is assumed to be concentrated. It may be expressed in inches from the reference datum, or in percent of mean aerodynamic chord (MAC). The location depends on the distribution of weight in the airplane.

**Center-of-gravity limits.** The specified forward and aft points within which the CG must be located during flight. These limits are indicated on pertinent airplane specifications.

**Center-of-gravity range.** The distance between the forward and aft CG limits indicated on pertinent airplane specifications.

**Centrifugal flow compressor.** An impeller-shaped device that receives air at its center and slings air outward at high velocity into a diffuser for increased pressure. Also referred to as a radial outflow compressor.

**Chart Supplements.** A listing of data on record with the FAA on all open-to-the-public airports, seaplane bases, heliports, military facilities and selected private use airports specifically requested by the Department of Defense (DOD) for which a DOD instrument approach procedure has been published in the U.S. Terminal Procedures Publication, airport sketches, NAVAIDs, communications data, weather data sources, airspace, special notices, VFR waypoints, Airport Diagrams and operational procedures.

**Chord line.** An imaginary straight line drawn through an airfoil from the leading edge to the trailing edge.

**Circuit breaker.** A circuit-protecting device that opens the circuit in case of excess current flow. A circuit breaker differs from a fuse in that it can be reset without having to be replaced.

**Clear air turbulence.** Turbulence not associated with any visible moisture.

**Climb gradient.** The ratio between distance traveled and altitude gained.

**Cockpit resource management.** Techniques designed to reduce pilot errors and manage errors that do occur utilizing cockpit human resources. The assumption is that errors are going to happen in a complex system with error-prone humans.

**Coefficient of lift.** See lift coefficient.

**Coffin corner.** The flight regime where any increase in airspeed will induce high speed Mach buffet and any decrease in airspeed will induce low speed Mach buffet.

**Combustion chamber.** The section of the engine into which fuel is injected and burned.

**Common traffic advisory frequency (CTAF).** The common frequency used by airport traffic to announce position reports in the vicinity of the airport.

**Complex aircraft.** An aircraft with retractable landing gear, flaps, and a controllable-pitch propeller, or one that is turbine-powered.

**Compression ratio.** 1. In a reciprocating engine, the ratio of the volume of an engine cylinder with the piston at the bottom center to the volume with the piston at top center. 2. In a turbine engine, the ratio of the pressure of the air at the discharge to the pressure of air at the inlet.

**Compressor bleed air.** See bleed air.

**Compressor bleed valves.** See bleed valve.

**Compressor section.** The section of a turbine engine that increases the pressure and density of the air flowing through the engine.

**Compressor stall.** In gas turbine engines, a condition in an axial-flow compressor in which one or more stages of rotor blades fail to pass air smoothly to the succeeding stages. A stall condition is caused by a pressure ratio that is incompatible with the engine rpm. Compressor stall will be indicated by a rise in exhaust temperature or rpm fluctuation, and if allowed to continue, may result in flameout and physical damage to the engine.

**Compressor surge.** A severe compressor stall across the entire compressor that can result in severe damage if not quickly corrected. This condition occurs with a complete stoppage of airflow or a reversal of airflow.

**Condition lever.** In a turbine engine, a powerplant control that controls the flow of fuel to the engine. The condition lever sets the desired engine rpm within a narrow range between that appropriate for ground and flight operations.

**Configuration.** This is a general term, which normally refers to the position of the landing gear and flaps.

**Constant speed propeller.** A controllable-pitch propeller whose pitch is automatically varied in flight by a governor to maintain a constant rpm in spite of varying air loads.

**Control touch.** The ability to sense the action of the airplane and its probable actions in the immediate future, with regard to attitude and speed variations, by sensing and evaluation of varying pressures and resistance of the control surfaces transmitted through the cockpit flight controls.

**Controllability.** A measure of the response of an aircraft relative to the pilot's flight control inputs.

**Controllable-pitch propeller.** A propeller in which the blade angle can be changed during flight by a control in the cockpit.

**Conventional landing gear.** Landing gear employing a third rear-mounted wheel. These airplanes are also sometimes referred to as tailwheel airplanes.

**Coordinated flight.** Application of all appropriate flight and power controls to prevent slipping or skidding in any flight condition.

**Coordination.** The ability to use the hands and feet together subconsciously and in the proper relationship to produce desired results in the airplane.

**Core airflow.** Air drawn into the engine for the gas generator.

**Cowl flaps.** Devices arranged around certain air-cooled engine cowlings which may be opened or closed to regulate the flow of air around the engine.

**Crab.** A flight condition in which the nose of the airplane is pointed into the wind a sufficient amount to counteract a crosswind and maintain a desired track over the ground.

**Crazing.** Small fractures in aircraft windshields and windows caused from being exposed to the ultraviolet rays of the sun and temperature extremes.

**Critical altitude.** The maximum altitude under standard atmospheric conditions at which a turbocharged engine can produce its rated horsepower.

**Critical angle of attack.** The angle of attack at which a wing stalls regardless of airspeed, flight attitude, or weight.

**Critical engine.** The engine whose failure has the most adverse effect on directional control.

**Cross controlled.** A condition where aileron deflection is in the opposite direction of rudder deflection.

**Crossfeed.** A system that allows either engine on a twin-engine airplane to draw fuel from any fuel tank.

**Crosswind component.** The wind component, measured in knots, at 90° to the longitudinal axis of the runway.

**Current limiter.** A device that limits the generator output to a level within that rated by the generator manufacturer.

## D

**Datum (reference datum).** An imaginary vertical plane or line from which all measurements of moment arm are taken. The datum is established by the manufacturer. Once the datum has been selected, all moment arms and the location of CG range are measured from this point.

**Decompression sickness.** A condition where the low pressure at high altitudes allows bubbles of nitrogen to form in the blood and joints causing severe pain. Also known as the bends.

**Deicer boots.** Inflatable rubber boots attached to the leading edge of an airfoil. They can be sequentially inflated and deflated to break away ice that has formed over their surface.

**Deicing.** Removing ice after it has formed.

**Delamination.** The separation of layers.

**Density altitude.** This altitude is pressure altitude corrected for variations from standard temperature. When conditions are standard, pressure altitude and density altitude are the same. If the temperature is above standard, the density altitude is higher than pressure altitude. If the temperature is below standard, the density altitude is lower than pressure altitude. This is an important altitude because it is directly related to the airplane's performance.

**Designated pilot examiner (DPE).** An individual designated by the FAA to administer practical tests to pilot applicants.

**Detonation.** The sudden release of heat energy from fuel in an aircraft engine caused by the fuel-air mixture reaching its critical pressure and temperature. Detonation occurs as a violent explosion rather than a smooth burning process.

**Dewpoint.** The temperature at which air can hold no more water.

**Differential ailerons.** Control surface rigged such that the aileron moving up moves a greater distance than the aileron moving down. The up aileron produces extra parasite drag to compensate for the additional induced drag caused by the down aileron. This balancing of the drag forces helps minimize adverse yaw.

**Diffusion.** Reducing the velocity of air causing the pressure to increase.

**Directional stability.** Stability about the vertical axis of an aircraft, whereby an aircraft tends to return, on its own, to flight aligned with the relative wind when disturbed from that equilibrium state. The vertical tail is the primary contributor to directional stability, causing an airplane in flight to align with the relative wind.

**Ditching.** Emergency landing in water.

**Downwash.** Air deflected perpendicular to the motion of the airfoil.

**Drag curve.** A visual representation of the amount of drag of an aircraft at various airspeeds.

**Drag.** An aerodynamic force on a body acting parallel and opposite to the relative wind. The resistance of the atmosphere to the relative motion of an aircraft. Drag opposes thrust and limits the speed of the airplane.

**Drift angle.** Angle between heading and track.

**Ducted-fan engine.** An engine-propeller combination that has the propeller enclosed in a radial shroud. Enclosing the propeller improves the efficiency of the propeller.

**Dutch roll.** A combination of rolling and yawing oscillations that normally occurs when the dihedral effects of an aircraft are more powerful than the directional stability. Usually dynamically stable but objectionable in an airplane because of the oscillatory nature.

**Dynamic hydroplaning.** A condition that exists when landing on a surface with standing water deeper than the tread depth of the tires. When the brakes are applied, there is a possibility that the brake will lock up and the tire will ride on the surface of the water, much like a water ski. When the tires are hydroplaning, directional control and braking action are virtually impossible. An effective anti-skid system can minimize the effects of hydroplaning.

**Dynamic stability.** The property of an aircraft that causes it, when disturbed from straight-and-level flight, to develop forces or moments that restore the original condition of straight and level.

## E

**Electrical bus.** See bus bar.

**Electrohydraulic.** Hydraulic control which is electrically actuated.

**Elevator.** The horizontal, movable primary control surface in the tail section, or empennage, of an airplane. The elevator is hinged to the trailing edge of the fixed horizontal stabilizer.

**Emergency locator transmitter.** A small, self-contained radio transmitter that will automatically, upon the impact of a crash, transmit an emergency signal on 121.5, 243.0, or 406.0 MHz.

**Empennage.** The section of the airplane that consists of the vertical stabilizer, the horizontal stabilizer, and the associated control surfaces.

**Energy balance equation:** According to this equation, the net transfer of mechanical energy into and out of the airplane (a function of thrust minus drag) is always equal to the change in its total mechanical energy (a function of altitude and airspeed).

**Energy distribution error.** An energy error where the total mechanical energy is correct, but the distribution between potential (altitude) and kinetic energy (airspeed) is not correct relative to the intended altitude-speed profile. When this error occurs, the pilot will observe that altitude and airspeed deviate in opposite directions (e.g., higher and slower than desired; or lower and faster than desired). An example would be an airplane on final approach that is above the desired glide slope and at a slower airspeed than desired.

**Energy error.** An altitude and/or airspeed deviation from an intended target expressed in terms of energy. Depending on the airplane's total amount of energy and its distribution between altitude and airspeed, energy errors are classified as total energy errors, energy distribution errors, or a combination of both errors.

**Energy exchange.** Trading one form of energy (e.g., altitude) for another form (e.g., airspeed).

**Energy height or total specific energy ( $E_S$ ).** Measured in units of height (e.g., feet), it represents the airplane's total energy per unit weight. It is found by dividing the sum of potential energy and kinetic energy by the airplane's weight. It also represents the maximum height that an airplane would reach from its current altitude, if it were to trade all its speed for altitude.

**Energy state.** The airplane's total mechanical energy *and* its distribution between altitude and airspeed.

**Energy system.** A flying airplane is an *open* energy system. That means that the airplane can gain energy from some source (e.g., fuel) and lose energy to the environment (e.g., surrounding air). In addition, energy can be added to or removed from the airplane's total mechanical energy stored as altitude and airspeed.

**Engine pressure ratio (EPR).** The ratio of turbine discharge pressure divided by compressor inlet pressure that is used as an indication of the amount of thrust being developed by a turbine engine.

**Environmental systems.** In an aircraft, the systems, including the supplemental oxygen systems, air conditioning systems, heaters, and pressurization systems, which make it possible for an occupant to function at high altitude.

**Equilibrium.** A condition that exists within a body when the sum of the moments of all of the forces acting on the body is equal to zero. In aerodynamics, equilibrium is when all opposing forces acting on an aircraft are balanced (steady, unaccelerated flight conditions).

**Equivalent shaft horsepower (ESHP).** A measurement of the total horsepower of a turboprop engine, including that provided by jet thrust.

**Exhaust gas temperature (EGT).** The temperature of the exhaust gases as they leave the cylinders of a reciprocating engine or the turbine section of a turbine engine.

**Exhaust manifold.** The part of the engine that collects exhaust gases leaving the cylinders.

**Exhaust.** The rear opening of a turbine engine exhaust duct. The nozzle acts as an orifice, the size of which determines the density and velocity of the gases as they emerge from the engine.

## F

**False horizon.** An optical illusion where the pilot confuses a row of lights along a road or other straight line as the horizon.

**False start.** See hung start.

**Feathering propeller (feathered).** A controllable pitch propeller with a pitch range sufficient to allow the blades to be turned parallel to the line of flight to reduce drag and prevent further damage to an engine that has been shut down after a malfunction.

**Fixation.** A psychological condition where the pilot fixes attention on a single source of information and ignores all other sources.

**Fixed-shaft turboprop engine.** A turboprop engine where the gas producer spool is directly connected to the output shaft.



**Fixed-pitch propellers.** Propellers with fixed blade angles. Fixed-pitch propellers are designed as climb propellers, cruise propellers, or standard propellers.

**Flaps.** Hinged portion of the trailing edge between the ailerons and fuselage. In some aircraft, ailerons and flaps are interconnected to produce full-span “flaperons.” In either case, flaps change the lift and drag on the wing.

**Flat pitch.** A propeller configuration when the blade chord is aligned with the direction of rotation.

**Flicker vertigo.** A disorienting condition caused from flickering light off the blades of the propeller.

**Flight director.** An automatic flight control system in which the commands needed to fly the airplane are electronically computed and displayed on a flight instrument. The commands are followed by the human pilot with manual control inputs or, in the case of an autopilot system, sent to servos that move the flight controls.

**Flight idle.** Engine speed, usually in the 70-80 percent range, for minimum flight thrust.

**Floating.** A condition when landing where the airplane does not settle to the runway due to excessive airspeed.

**Force (F).** The energy applied to an object that attempts to cause the object to change its direction, speed, or motion. In aerodynamics, it is expressed as F, T (thrust), L (lift), W (weight), or D (drag), usually in pounds.

**Form drag.** The part of parasite drag on a body resulting from the integrated effect of the static pressure acting normal to its surface resolved in the drag direction.

**Forward slip.** A slip in which the airplane’s direction of motion continues the same as before the slip was begun. In a forward slip, the airplane’s longitudinal axis is at an angle to its flightpath.

**Free power turbine engine.** A turboprop engine where the gas producer spool is on a separate shaft from the output shaft. The free power turbine spins independently of the gas producer and drives the output shaft.

**Friction drag.** The part of parasitic drag on a body resulting from viscous shearing stresses over its wetted surface.

**Frise-type aileron.** Aileron having the nose portion projecting ahead of the hinge line. When the trailing edge of the aileron moves up, the nose projects below the wing’s lower surface and produces some parasite drag, decreasing the amount of adverse yaw.

**Fuel control unit.** The fuel-metering device used on a turbine engine that meters the proper quantity of fuel to be fed into the burners of the engine. It integrates the parameters of inlet air temperature, compressor speed, compressor discharge pressure, and exhaust gas temperature with the position of the cockpit power control lever.

**Fuel efficiency.** Defined as the amount of fuel used to produce a specific thrust or horsepower divided by the total potential power contained in the same amount of fuel.

**Fuel heater.** A radiator-like device which has fuel passing through the core. A heat exchange occurs to keep the fuel temperature above the freezing point of water so that entrained water does not form ice crystals, which could block fuel flow.

**Fuel injection.** A fuel metering system used on some aircraft reciprocating engines in which a constant flow of fuel is fed to injection nozzles in the heads of all cylinders just outside of the intake valve. It differs from sequential fuel injection in which a timed charge of high-pressure fuel is sprayed directly into the combustion chamber of the cylinder.

**Fuel load.** The expendable part of the load of the airplane. It includes only usable fuel, not fuel required to fill the lines or that which remains trapped in the tank sumps.

**Fuel tank sump.** A sampling port in the lowest part of the fuel tank that the pilot can utilize to check for contaminants in the fuel.

**Fuselage.** The section of the airplane that consists of the cabin and/or cockpit, containing seats for the occupants and the controls for the airplane.

## G

**Gas generator.** The basic power producing portion of a gas turbine engine and excluding such sections as the inlet duct, the fan section, free power turbines, and tailpipe. Each manufacturer designates what is included as the gas generator, but generally consists of the compressor, diffuser, combustor, and turbine.

**Gas turbine engine.** A form of heat engine in which burning fuel adds energy to compressed air and accelerates the air through the remainder of the engine. Some of the energy is extracted to turn the air compressor, and the remainder accelerates the air to produce thrust. Some of this energy can be converted into torque to drive a propeller or a system of rotors for a helicopter.

**Glide ratio.** The ratio between distance traveled and altitude lost during non-powered flight.

**Glidepath.** The path of an aircraft relative to the ground while approaching a landing.

**Global position system (GPS).** A satellite-based radio positioning, navigation, and time-transfer system.

**Go-around.** Terminating a landing approach.

**Governing range.** The range of pitch a propeller governor can control during flight.

**Governor.** A control which limits the maximum rotational speed of a device.

**Gross weight.** The total weight of a fully loaded aircraft including the fuel, oil, crew, passengers, and cargo.

**Ground adjustable trim tab.** A metal trim tab on a control surface that is not adjustable in flight. Bent in one direction or another while on the ground to apply trim forces to the control surface.

**Ground effect.** A condition of improved performance encountered when an airplane is operating very close to the ground. When an airplane's wing is under the influence of ground effect, there is a reduction in upwash, downwash, and wingtip vortices. As a result of the reduced wingtip vortices, induced drag is reduced.

**Ground idle.** Gas turbine engine speed usually 60-70 percent of the maximum rpm range, used as a minimum thrust setting for ground operations.

**Ground loop.** A sharp, uncontrolled change of direction of an airplane on the ground.

**Ground power unit (GPU).** A type of small gas turbine whose purpose is to provide electrical power, and/or air pressure for starting aircraft engines. A ground unit is connected to the aircraft when needed. Similar to an aircraft-installed auxiliary power unit.

**Ground track.** The aircraft's path over the ground when in flight.

**Groundspeed (GS).** The actual speed of the airplane over the ground. It is true airspeed adjusted for wind. Groundspeed decreases with a headwind, and increases with a tailwind.

**Gust penetration speed.** The speed that gives the greatest margin between the high and low Mach speed buffets.

**Gyroscopic precession.** An inherent quality of rotating bodies, which causes an applied force to be manifested 90° in the direction of rotation from the point where the force is applied.

## H

**Hand propping.** Starting an engine by rotating the propeller by hand.

**Heading bug.** A marker on the heading indicator that can be rotated to a specific heading for reference purposes, or to command an autopilot to fly that heading.

**Heading indicator.** An instrument which senses airplane movement and displays heading based on a 360° azimuth, with the final zero omitted. The heading indicator, also called a directional gyro, is fundamentally a mechanical instrument designed to facilitate the use of the magnetic compass. The heading indicator is not affected by the forces that make the magnetic compass difficult to interpret.

**Heading.** The direction in which the nose of the aircraft is pointing during flight.

**Headwind component.** The component of atmospheric winds that acts opposite to the aircraft's flightpath.

**High performance aircraft.** An aircraft with an engine of more than 200 horsepower.

**Horizon.** The line of sight boundary between the earth and the sky.

**Horsepower.** The term, originated by inventor James Watt, means the amount of work a horse could do in one second. One horsepower equals 550 foot-pounds per second, or 33,000 foot-pounds per minute.

**Hot start.** In gas turbine engines, a start which occurs with normal engine rotation, but exhaust temperature exceeds prescribed limits. This is usually caused by an excessively rich mixture in the combustor. The fuel to the engine must be terminated immediately to prevent engine damage.

**Hung start.** In gas turbine engines, a condition of normal light off but with rpm remaining at some low value rather than increasing to the normal idle rpm. This is often the result of insufficient power to the engine from the starter. In the event of a hung start, the engine should be shut down.

**Hydraulics.** The branch of science that deals with the transmission of power by incompressible fluids under pressure.

**Hydroplaning.** A condition that exists when landing on a surface with standing water deeper than the tread depth of the tires. When the brakes are applied, there is a possibility that the brake will lock up and the tire will ride on the surface of the water, much like a water ski. When the tires are hydroplaning, directional control and braking action are virtually impossible. An effective anti-skid system can minimize the effects of hydroplaning.

**Hypoxia.** A lack of sufficient oxygen reaching the body tissues.

## I

**Igniter plugs.** The electrical device used to provide the spark for starting combustion in a turbine engine. Some igniters resemble spark plugs, while others, called glow plugs, have a coil of resistance wire that glows red hot when electrical current flows through the coil.

**Impact ice.** Ice that forms on the wings and control surfaces or on the carburetor heat valve, the walls of the air scoop, or the carburetor units during flight. Impact ice collecting on the metering elements of the carburetor may upset fuel metering or stop carburetor fuel flow.

**Inclinometer.** An instrument consisting of a curved glass tube, housing a glass ball, and damped with a fluid similar to kerosene. It may be used to indicate inclination, as a level, or, as used in the turn indicators, to show the relationship between gravity and centrifugal force in a turn.

**Indicated airspeed (IAS).** The direct instrument reading obtained from the airspeed indicator, uncorrected for variations in atmospheric density, installation error, or instrument error. Manufacturers use this airspeed as the basis for determining airplane performance. Takeoff, landing, and stall speeds listed in the AFM or POH are indicated airspeeds and do not normally vary with altitude or temperature.

**Indicated altitude.** The altitude read directly from the altimeter (uncorrected) when it is set to the current altimeter setting.

**Induced drag.** That part of total drag which is created by the production of lift. Induced drag increases with a decrease in airspeed.

**Induction manifold.** The part of the engine that distributes intake air to the cylinders.

**Inertia.** The opposition which a body offers to a change of motion.

**Initial climb.** This stage of the climb begins when the airplane leaves the ground and a pitch attitude has been established to climb away from the takeoff area.

**Instrument Flight Rules (IFR).** Rules that govern the procedure for conducting flight in weather conditions below VFR weather minimums. The term “IFR” also is used to define weather conditions and the type of flight plan under which an aircraft is operating.

**Integral fuel tank.** A portion of the aircraft structure, usually a wing, which is sealed off and used as a fuel tank. When a wing is used as an integral fuel tank, it is called a “wet wing.”

**Intercooler.** A device used to reduce the temperature of the compressed air before it enters the fuel metering device. The resulting cooler air has a higher density, which permits the engine to be operated with a higher power setting.

**Internal combustion engine.** An engine that produces power as a result of expanding hot gases from the combustion of fuel and air within the engine itself. A steam engine where coal is burned to heat up water inside the engine is an example of an external combustion engine.

**International Standard Atmosphere (ISA).** Standard atmospheric conditions consisting of a temperature of 59 °F (15 °C), and a barometric pressure of 29.92 "Hg. (1013.2 mb) at sea level. ISA values can be calculated for various altitudes using a standard lapse rate of approximately 2 °C per 1,000 feet.

**Interstage turbine temperature (ITT).** The temperature of the gases between the high pressure and low pressure turbines.

**Inverter.** An electrical device that changes DC to AC power.

**Irreversible Deceleration and/or Sink Rate.** Unrecoverable depletion of mechanical energy as a result of continuous loss of airspeed and/or altitude coupled with insufficient excess power available under a given flight condition. Failure to recover above a certain critical AGL altitude results in the airplane hitting the ground regardless of what the pilot does.

## J

**Jet-powered airplane.** An aircraft powered by a turbojet or turbofan engine.

## K

**Kinesthesia.** The sensing of movements by feel.

**Kinetic energy.** Amount of energy due to the airspeed, expressed as  $\frac{1}{2}mV^2$  where m = airplane’s mass and V = airspeed.

## L

**Lateral axis.** An imaginary line passing through the center of gravity of an airplane and extending across the airplane from wingtip to wingtip.

**Lateral stability (rolling).** The stability about the longitudinal axis of an aircraft. Rolling stability or the ability of an airplane to return to level flight due to a disturbance that causes one of the wings to drop.

**Lead-acid battery.** A commonly used secondary cell having lead as its negative plate and lead peroxide as its positive plate. Sulfuric acid and water serve as the electrolyte.

**Leading edge devices.** High lift devices which are found on the leading edge of the airfoil. The most common types are fixed slots, movable slats, and leading edge flaps.

**Leading edge flap.** A portion of the leading edge of an airplane wing that folds downward to increase the camber, lift, and drag of the wing. The leading-edge flaps are extended for takeoffs and landings to increase the amount of aerodynamic lift that is produced at any given airspeed.

**Leading edge.** The part of an airfoil that meets the airflow first.

**Licensed empty weight.** The empty weight that consists of the airframe, engine(s), unusable fuel, and undrainable oil plus standard and optional equipment as specified in the equipment list. Some manufacturers used this term prior to GAMA standardization.

**Lift coefficient.** A coefficient representing the lift of a given airfoil. Lift coefficient is obtained by dividing the lift by the free-stream dynamic pressure and the representative area under consideration.

**Lift.** One of the four main forces acting on an aircraft. On a fixed-wing aircraft, an upward force created by the effect of airflow as it passes over and under the wing.

**Lift/drag ratio (L/D).** The efficiency of an airfoil section. It is the ratio of the coefficient of lift to the coefficient of drag for any given angle of attack.

**Lift-off.** The act of becoming airborne as a result of the wings lifting the airplane off the ground, or the pilot rotating the nose up, increasing the angle of attack to start a climb.

**Limit load factor.** Amount of stress, or load factor, that an aircraft can withstand before structural damage or failure occurs.

**Load factor.** The ratio of the load supported by the airplane's wings to the actual weight of the aircraft and its contents. Also referred to as G-loading.

**Longitudinal axis.** An imaginary line through an aircraft from nose to tail, passing through its center of gravity. The longitudinal axis is also called the roll axis of the aircraft. Movement of the ailerons rotates an airplane about its longitudinal axis.

**Longitudinal stability (pitching).** Stability about the lateral axis. A desirable characteristic of an airplane whereby it tends to return to its trimmed angle of attack after displacement.

## M

**Mach buffet.** Airflow separation behind a shock-wave pressure barrier caused by airflow over flight surfaces exceeding the speed of sound.

**Mach compensating device.** A device to alert the pilot of inadvertent excursions beyond its certified maximum operating speed.

**Mach critical.** The Mach speed at which some portion of the airflow over the wing first equals Mach 1.0. This is also the speed at which a shock wave first appears on the airplane.

**Mach tuck.** A condition that can occur when operating a swept-wing airplane in the transonic speed range. A shock wave could form in the root portion of the wing and cause the air behind it to separate. This shock-induced separation causes the center of pressure to move aft. This, combined with the increasing amount of nose down force at higher speeds to maintain level flight, causes the nose to "tuck." If not corrected, the airplane could enter a steep, sometimes unrecoverable dive.

**Mach.** Speed relative to the speed of sound. Mach 1 is the speed of sound.

**Magnetic compass.** A device for determining direction measured from magnetic north.

**Main gear.** The wheels of an aircraft's landing gear that supports the major part of the aircraft's weight.

**Maneuverability.** Ability of an aircraft to change directions along a flightpath and withstand the stresses imposed upon it.

**Maneuvering speed ( $V_A$ ).** The maximum speed where full, abrupt control movement can be used without overstressing the airframe.

**Manifold pressure (MP).** The absolute pressure of the fuel/ air mixture within the intake manifold, usually indicated in inches of mercury.

**Maximum allowable takeoff power.** The maximum power an engine is allowed to develop for a limited period of time; usually about one minute.

**Maximum landing weight.** The greatest weight that an airplane normally is allowed to have at landing.

**Maximum ramp weight.** The total weight of a loaded aircraft, including all fuel. It is greater than the takeoff weight due to the fuel that will be burned during the taxi and run-up operations. Ramp weight may also be referred to as taxi weight.

**Maximum takeoff weight.** The maximum allowable weight for takeoff.

**Maximum weight.** The maximum authorized weight of the aircraft and all of its equipment as specified in the Type Certificate Data Sheets (TCDS) for the aircraft.

**Maximum zero fuel weight (GAMA).** The maximum weight, exclusive of usable fuel.

**Minimum controllable airspeed.** An airspeed at which any further increase in angle of attack, increase in load factor, or reduction in power, would result in an immediate stall.

**Minimum drag speed ( $L/D_{MAX}$ ).** The point on the total drag curve where the lift-to-drag ratio is the greatest. At this speed, total drag is minimized.

**Mixture.** The ratio of fuel to air entering the engine's cylinders.

**$M_{MO}$ .** Maximum operating speed expressed in terms of a decimal of Mach speed.

**Moment arm.** The distance from a datum to the applied force.

**Moment index (or index).** A moment divided by a constant such as 100, 1,000, or 10,000. The purpose of using a moment index is to simplify weight and balance computations of airplanes where heavy items and long arms result in large, unmanageable numbers.

**Moment.** The product of the weight of an item multiplied by its arm. Moments are expressed in pound-inches (lb-in). Total moment is the weight of the airplane multiplied by the distance between the datum and the CG.

**Movable slat.** A movable auxiliary airfoil on the leading edge of a wing. It is closed in normal flight but extends at high angles of attack. This allows air to continue flowing over the top of the wing and delays airflow separation.

**Mushing.** A flight condition caused by slow speed where the control surfaces are marginally effective.

## N

**N<sub>1</sub>, N<sub>2</sub>, N<sub>3</sub>.** Spool speed expressed in percent rpm. N<sub>1</sub> on a turboprop is the gas producer speed. N<sub>1</sub> on a turbofan or turbojet engine is the fan speed or low pressure spool speed. N<sub>2</sub> is the high pressure spool speed on engine with 2 spools and medium pressure spool on engines with 3 spools with N<sub>3</sub> being the high pressure spool.

**Nacelle.** A streamlined enclosure on an aircraft in which an engine is mounted. On multiengine propeller-driven airplanes, the nacelle is normally mounted on the leading edge of the wing.

**Negative static stability.** The initial tendency of an aircraft to continue away from the original state of equilibrium after being disturbed.

**Negative torque sensing (NTS).** A system in a turboprop engine that prevents the engine from being driven by the propeller. The NTS increases the blade angle when the propellers try to drive the engine.

**Neutral static stability.** The initial tendency of an aircraft to remain in a new condition after its equilibrium has been disturbed.

**Nickel-cadmium battery (NiCad).** A battery made up of alkaline secondary cells. The positive plates are nickel hydroxide, the negative plates are cadmium hydroxide, and potassium hydroxide is used as the electrolyte.

**Normal category.** An airplane that has a seating configuration, excluding pilot seats, of nine or less, a maximum certificated takeoff weight of 12,500 pounds or less, and intended for nonacrobatic operation.

**Normalizing (turbonormalizing).** A turbocharger that maintains sea level pressure in the induction manifold at altitude.

## O

**Octane.** The rating system of aviation gasoline with regard to its antidetonating qualities.

**Overboost.** A condition in which a reciprocating engine has exceeded the maximum manifold pressure allowed by the manufacturer. Can cause damage to engine components.

**Overspeed.** A condition in which an engine has produced more rpm than the manufacturer recommends, or a condition in which the actual engine speed is higher than the desired engine speed as set on the propeller control.

**Overtemp.** A condition in which a device has reached a temperature above that approved by the manufacturer or any exhaust temperature that exceeds the maximum allowable for a given operating condition or time limit. Can cause internal damage to an engine.

**Overtorque.** A condition in which an engine has produced more torque (power) than the manufacturer recommends, or a condition in a turboprop or turboshaft engine where the engine power has exceeded the maximum allowable for a given operating condition or time limit. Can cause internal damage to an engine.

## P

**Parasite drag.** That part of total drag created by the design or shape of airplane parts. Parasite drag increases with an increase in airspeed.

**Payload (GAMA).** The weight of occupants, cargo, and baggage.

**P-factor.** A tendency for an aircraft to yaw to the left due to the descending propeller blade on the right producing more thrust than the ascending blade on the left. This occurs when the aircraft's longitudinal axis is in a climbing attitude in relation to the relative wind. The P-factor would be to the right if the aircraft had a counterclockwise rotating propeller.

**Pilot's Operating Handbook (POH).** A document developed by the airplane manufacturer and contains the FAA-approved Airplane Flight Manual (AFM) information.

**Piston engine.** A reciprocating engine.

**Pitch.** The rotation of an airplane about its lateral axis, or on a propeller, the blade angle as measured from plane of rotation.

**Pivotal altitude.** A specific altitude at which, when an airplane turns at a given groundspeed, a projecting of the sighting reference line to a selected point on the ground will appear to pivot on that point.



**Pneumatic system.** The power system in an aircraft used for operating such items as landing gear, brakes, and wing flaps with compressed air as the operating fluid.

**Porpoising.** Oscillating around the lateral axis of the aircraft during landing.

**Position lights.** Lights on an aircraft consisting of a red light on the left wing, a green light on the right wing, and a white light on the tail. CFRs require that these lights be displayed in flight from sunset to sunrise.

**Positive static stability.** The initial tendency to return to a state of equilibrium when disturbed from that state.

**Potential energy.** Amount of energy due to the altitude, expressed as  $mgh$ , where  $m$  = airplane's mass, and  $g$  = gravitational constant, and  $h$  = altitude.

**Power available.** The airplane's rate of energy gain due to maximum available engine thrust at a given airspeed. Expressed as  $TV$ , where  $T$  = engine thrust, and  $V$  = airspeed. Usually measured in horsepower, foot-pound per minute, or foot-pound per second.

**Power distribution bus.** See bus bar.

**Power lever.** The cockpit lever connected to the fuel control unit for scheduling fuel flow to the combustion chambers of a turbine engine.

**Power required.** The airplane's rate of energy loss due to total drag at a given airspeed. Expressed as  $DV$ , where  $D$  = total drag, and  $V$  = airspeed. Usually measured in horsepower, foot-pound per minute, or foot-pound per second.

**Power.** Implies work rate or units of work per unit of time, and as such, it is a function of the speed at which the force is developed. The term "power required" is generally associated with reciprocating engines.

**Powerplant.** A complete engine and propeller combination with accessories.

**Practical slip limit.** The maximum slip an aircraft is capable of performing due to rudder travel limits.

**Precession.** The tilting or turning of a gyro in response to deflective forces causing slow drifting and erroneous indications in gyroscopic instruments.

**Preignition.** Ignition occurring in the cylinder before the time of normal ignition. Preignition is often caused by a local hot spot in the combustion chamber igniting the fuel/air mixture.

**Pressure altitude.** The altitude indicated when the altimeter setting window (barometric scale) is adjusted to 29.92. This is the altitude above the standard datum plane, which is a theoretical plane where air pressure (corrected to 15 °C) equals 29.92 "Hg. Pressure altitude is used to compute density altitude, true altitude, true airspeed, and other performance data.

**Profile drag.** The total of the skin friction drag and form drag for a two-dimensional airfoil section.

**Propeller blade angle.** The angle between the propeller chord and the propeller plane of rotation.

**Propeller lever.** The control on a free power turbine turboprop that controls propeller speed and the selection for propeller feathering.

**Propeller slipstream.** The volume of air accelerated behind a propeller producing thrust.

**Propeller synchronization.** A condition in which all of the propellers have their pitch automatically adjusted to maintain a constant rpm among all of the engines of a multiengine aircraft.

**Propeller.** A device for propelling an aircraft that, when rotated, produces by its action on the air, a thrust approximately perpendicular to its plane of rotation. It includes the control components normally supplied by its manufacturer.

## R

**Ramp weight.** The total weight of the aircraft while on the ramp. It differs from takeoff weight by the weight of the fuel that will be consumed in taxiing to the point of takeoff.

**Rate of turn.** The rate in degrees/second of a turn.

**Reciprocating engine.** An engine that converts the heat energy from burning fuel into the reciprocating movement of the pistons. This movement is converted into a rotary motion by the connecting rods and crankshaft.

**Reduction gear.** The gear arrangement in an aircraft engine that allows the engine to turn at a faster speed than the propeller.

**Region of reverse command.** Flight regime in which flight at a higher airspeed requires a lower power setting and a lower airspeed requires a higher power setting in order to maintain altitude.

**Registration certificate.** A State and Federal certificate that documents aircraft ownership.

**Relative wind.** The direction of the airflow with respect to the wing. If a wing moves forward horizontally, the relative wind moves backward horizontally. Relative wind is parallel to and opposite the flightpath of the airplane.

**Reverse thrust.** A condition where jet thrust is directed forward during landing to increase the rate of deceleration.

**Reversing propeller.** A propeller system with a pitch change mechanism that includes full reversing capability. When the pilot moves the throttle controls to reverse, the blade angle changes to a pitch angle and produces a reverse thrust, which slows the airplane down during a landing.

**Roll.** The motion of the aircraft about the longitudinal axis. It is controlled by the ailerons.

**Roundout (flare).** A pitch-up during landing approach to reduce rate of descent and forward speed prior to touchdown.

**Rudder.** The movable primary control surface mounted on the trailing edge of the vertical fin of an airplane. Movement of the rudder rotates the airplane about its vertical axis.

**Ruddervator.** A pair of control surfaces on the tail of an aircraft arranged in the form of a V. These surfaces, when moved together by the control wheel, serve as elevators, and when moved differentially by the rudder pedals, serve as a rudder.

**Runway centerline lights.** Runway centerline lights are installed on some precision approach runways to facilitate landing under adverse visibility conditions. They are located along the runway centerline and are spaced at 50-foot intervals. When viewed from the landing threshold, the runway centerline lights are white until the last 3,000 feet of the runway. The white lights begin to alternate with red for the next 2,000 feet, and for the last 1,000 feet of the runway, all centerline lights are red.

**Runway centerline markings.** The runway centerline identifies the center of the runway and provides alignment guidance during takeoff and landings. The centerline consists of a line of uniformly spaced stripes and gaps.

**Runway edge lights.** Runway edge lights are used to outline the edges of runways during periods of darkness or restricted visibility conditions. These light systems are classified according to the intensity or brightness they are capable of producing: they are the High Intensity Runway Lights (HIRL), Medium Intensity Runway Lights (MIRL), and the Low Intensity Runway Lights (LIRL). The HIRL and MIRL systems have variable intensity controls, whereas the LIRLs normally have one intensity setting.

**Runway end identifier lights (REIL).** One component of the runway lighting system. These lights are installed at many airfields to provide rapid and positive identification of the approach end of a particular runway.

**Runway incursion.** Any occurrence at an airport involving an aircraft, vehicle, person, or object on the ground that creates a collision hazard or results in loss of separation with an aircraft taking off, intending to takeoff, landing, or intending to land.

**Runway threshold markings.** Runway threshold markings come in two configurations. They either consist of eight longitudinal stripes of uniform dimensions disposed symmetrically about the runway centerline, or the number of stripes is related to the runway width. A threshold marking helps identify the beginning of the runway that is available for landing. In some instances, the landing threshold may be displaced.

## S

**Safety (SQUAT) switch.** An electrical switch mounted on one of the landing gear struts. It is used to sense when the weight of the aircraft is on the wheels.

**Scan.** A procedure used by the pilot to visually identify all resources of information in flight.

**Sea level.** A reference height used to determine standard atmospheric conditions and altitude measurements.

**Segmented circle.** A visual ground based structure to provide traffic pattern information.

**Service ceiling.** The maximum density altitude where the best rate-of-climb airspeed will produce a 100 feet-per-minute climb at maximum weight while in a clean configuration with maximum continuous power.

**Servo tab.** An auxiliary control mounted on a primary control surface, which automatically moves in the direction opposite the primary control to provide an aerodynamic assist in the movement of the control.

**Shaft horse power (SHP).** Turboshaft engines are rated in shaft horsepower and calculated by use of a dynamometer device. Shaft horsepower is exhaust thrust converted to a rotating shaft.

**Shock waves.** A compression wave formed when a body moves through the air at a speed greater than the speed of sound.

**Sideslip.** A slip in which the airplane's longitudinal axis remains parallel to the original flightpath, but the airplane no longer flies straight ahead. Instead, the horizontal component of wing lift forces the airplane to move sideways toward the low wing.

**Single engine absolute ceiling.** The altitude that a twin engine airplane can no longer climb with one engine inoperative.

**Single engine service ceiling.** The altitude that a twin engine airplane can no longer climb at a rate greater than 50 fpm with one engine inoperative.

**Skid.** A condition where the tail of the airplane follows a path outside the path of the nose during a turn.

**Slip.** An intentional maneuver to decrease airspeed or increase rate of descent, and to compensate for a crosswind on landing. A slip can also be unintentional when the pilot fails to maintain the aircraft in coordinated flight.

**Specific excess power ( $P_S$ ).** Measured in feet per minute or feet per second, it represents rate of energy change—the ability of an airplane to climb or accelerate from a given flight condition. Available specific excess power is found by dividing the difference between power available and power required by the airplane's weight.

**Specific fuel consumption.** Number of pounds of fuel consumed in 1 hour to produce 1 HP.

**Speed brakes.** A control system that extends from the airplane structure into the airstream to produce drag and slow the airplane.

**Speed instability.** A condition in the region of reverse command where a disturbance that causes the airspeed to decrease causes total drag to increase, which in turn, causes the airspeed to decrease further.

**Speed sense.** The ability to sense instantly and react to any reasonable variation of airspeed.

**Speed.** The distance traveled in a given time.

**Spin.** An aggravated stall that results in what is termed an “autorotation” wherein the airplane follows a downward corkscrew path. As the airplane rotates around the vertical axis, the rising wing is less stalled than the descending wing creating a rolling, yawing, and pitching motion.

**Spiral instability.** A condition that exists when the static directional stability of the airplane is very strong as compared to the effect of its dihedral in maintaining lateral equilibrium.

**Spiraling slipstream.** The slipstream of a propeller-driven airplane rotates around the airplane. This slipstream strikes the left side of the vertical fin, causing the airplane to yaw slightly. Vertical stabilizer offset is sometimes used by aircraft designers to counteract this tendency.

**Split shaft turbine engine.** See free power turbine engine.

**Spoilers.** High-drag devices that can be raised into the air flowing over an airfoil, reducing lift and increasing drag. Spoilers are used for roll control on some aircraft. Deploying spoilers on both wings at the same time allows the aircraft to descend without gaining speed. Spoilers are also used to shorten the ground roll after landing.

**Spool.** A shaft in a turbine engine which drives one or more compressors with the power derived from one or more turbines.

**Stabilator.** A single-piece horizontal tail surface on an airplane that pivots around a central hinge point. A stabilator serves the purposes of both the horizontal stabilizer and the elevator.

**Stability.** The inherent quality of an airplane to correct for conditions that may disturb its equilibrium, and to return or to continue on the original flightpath. It is primarily an airplane design characteristic.

**Stabilized approach.** A landing approach in which the pilot establishes and maintains a constant angle glidepath towards a predetermined point on the landing runway. It is based on the pilot’s judgment of certain visual cues, and depends on the maintenance of a constant final descent airspeed and configuration.

**Stall strips.** A spoiler attached to the inboard leading edge of some wings to cause the center section of the wing to stall before the tips. This assures lateral control throughout the stall.

**Stall.** A rapid decrease in lift caused by the separation of airflow from the wing’s surface brought on by exceeding the critical angle of attack. A stall can occur at any pitch attitude or airspeed.

**Standard atmosphere.** At sea level, the standard atmosphere consists of a barometric pressure of 29.92 inches of mercury ("Hg) or 1013.2 millibars, and a temperature of 15 °C (59 °F). Pressure and temperature normally decrease as altitude increases. The standard lapse rate in the lower atmosphere for each 1,000 feet of altitude is approximately 1 "Hg and 2 °C (3.5 °F). For example, the standard pressure and temperature at 3,000 feet mean sea level (MSL) is 26.92 "Hg (29.92 – 3) and 9 °C (15 °C – 6 °C).

**Standard day.** See standard atmosphere.

**Standard empty weight (GAMA).** This weight consists of the airframe, engines, and all items of operating equipment that have fixed locations and are permanently installed in the airplane; including fixed ballast, hydraulic fluid, unusable fuel, and full engine oil.

**Standard weights.** These have been established for numerous items involved in weight and balance computations. These weights should not be used if actual weights are available.

**Standard-rate turn.** A turn at the rate of 3° per second which enables the airplane to complete a 360° turn in 2 minutes.

**Starter/generator.** A combined unit used on turbine engines. The device acts as a starter for rotating the engine, and after running, internal circuits are shifted to convert the device into a generator.

**Static stability.** The initial tendency an aircraft displays when disturbed from a state of equilibrium.

**Station.** A location in the airplane that is identified by a number designating its distance in inches from the datum. The datum is, therefore, identified as station zero. An item located at station +50 would have an arm of 50 inches.

**Stick puller.** A device that applies aft pressure on the control column when the airplane is approaching the maximum operating speed.

**Stick pusher.** A device that applies an abrupt and large forward force on the control column when the airplane is nearing an angle of attack where a stall could occur.

**Stick shaker.** An artificial stall warning device that vibrates the control column.

**Stress risers.** A scratch, groove, rivet hole, forging defect, or other structural discontinuity that causes a concentration of stress.

**Subsonic.** Speed below the speed of sound.

**Supercharger.** An engine- or exhaust-driven air compressor used to provide additional pressure to the induction air so the engine can produce additional power.

**Supersonic.** Speed above the speed of sound.

**Supplemental Type Certificate (STC).** A certificate authorizing an alteration to an airframe, engine, or component that has been granted an approved type certificate.

**Swept-wing.** A wing planform in which the tips of the wing are farther back than the wing root.

## T

**Tailwheel aircraft.** See conventional landing gear.

**Takeoff roll (ground roll).** The total distance required for an aircraft to become airborne.

**Target reverser.** A thrust reverser in a jet engine in which clamshell doors swivel from the stowed position at the engine tailpipe to block all of the outflow and redirect some component of the thrust forward.

**Taxiway lights.** Omnidirectional lights that outline the edges of the taxiway and are blue in color.

**Taxiway turnoff lights.** Flush lights which emit a steady green color.

**Tetrahedron.** A large, triangular-shaped, kite-like object installed near the runway. Tetrahedrons are mounted on a pivot and are free to swing with the wind to show the pilot the direction of the wind as an aid in takeoffs and landings.

**Throttle.** The valve in a carburetor or fuel control unit that determines the amount of fuel-air mixture that is fed to the engine.

**Thrust line.** An imaginary line passing through the center of the propeller hub, perpendicular to the plane of the propeller rotation.

**Thrust reversers.** Devices which redirect the flow of jet exhaust to reverse the direction of thrust.

**Thrust.** The force which imparts a change in the velocity of a mass. This force is measured in pounds but has no element of time or rate. The term, thrust required, is generally associated with jet engines. A forward force which propels the airplane through the air.

**Timing.** The application of muscular coordination at the proper instant to make flight, and all maneuvers incident thereto, a constant smooth process.

**Tire cord.** Woven metal wire laminated into the tire to provide extra strength. A tire showing any cord must be replaced prior to any further flight.

**Torque meter.** An indicator used on some large reciprocating engines or on turboprop engines to indicate the amount of torque the engine is producing.

**Torque sensor.** See torque meter.

**Torque.** 1. A resistance to turning or twisting. 2. Forces that produce a twisting or rotating motion. 3. In an airplane, the tendency of the aircraft to turn (roll) in the opposite direction of rotation of the engine and propeller.

**Total drag.** The sum of the parasite and induced drag.

**Total energy error.** An energy error where the total amount of mechanical energy is not correct. The airplane has too much or too little total energy relative to the intended altitude-speed profile. When this error occurs, the pilot will observe that altitude and airspeed deviate in the *same* direction (e.g., higher and faster than desired; or lower and slower than desired). An example would be an airplane on final approach that is above the desired glide slope and at a faster airspeed than desired.

**Total mechanical energy.** Sum of the energy in altitude (potential energy) and the energy in airspeed (kinetic energy).

**Touchdown zone lights.** Two rows of transverse light bars disposed symmetrically about the runway centerline in the runway touchdown zone.

**Track.** The actual path made over the ground in flight.

**Trailing edge.** The portion of the airfoil where the airflow over the upper surface rejoins the lower surface airflow.

**Transition liner.** The portion of the combustor that directs the gases into the turbine plenum.

**Transonic.** At the speed of sound.

**Transponder.** The airborne portion of the secondary surveillance radar system. The transponder emits a reply when queried by a radar facility.

**Tricycle gear.** Landing gear employing a third wheel located on the nose of the aircraft.

**Trim tab.** A small auxiliary hinged portion of a movable control surface that can be adjusted during flight to a position resulting in a balance of control forces.

**Triple spool engine.** Usually a turbofan engine design where the fan is the  $N_1$  compressor, followed by the  $N_2$  intermediate compressor, and the  $N_3$  high pressure compressor, all of which rotate on separate shafts at different speeds.

**Tropopause.** The boundary layer between the troposphere and the mesosphere which acts as a lid to confine most of the water vapor, and the associated weather, to the troposphere.

**Troposphere.** The layer of the atmosphere extending from the surface to a height of 20,000 to 60,000 feet depending on latitude.

**True airspeed (TAS).** Calibrated airspeed corrected for altitude and nonstandard temperature. Because air density decreases with an increase in altitude, an airplane has to be flown faster at higher altitudes to cause the same pressure difference between pitot impact pressure and static pressure. Therefore, for a given calibrated airspeed, true airspeed increases as altitude increases; or for a given true airspeed, calibrated airspeed decreases as altitude increases.

**True altitude.** The vertical distance of the airplane above sea level—the actual altitude. It is often expressed as feet above mean sea level (MSL). Airport, terrain, and obstacle elevations on aeronautical charts are true altitudes.

**T-tail.** An aircraft with the horizontal stabilizer mounted on the top of the vertical stabilizer, forming a T.

**Turbine blades.** The portion of the turbine assembly that absorbs the energy of the expanding gases and converts it into rotational energy.

**Turbine outlet temperature (TOT).** The temperature of the gases as they exit the turbine section.

**Turbine plenum.** The portion of the combustor where the gases are collected to be evenly distributed to the turbine blades.

**Turbine rotors.** The portion of the turbine assembly that mounts to the shaft and holds the turbine blades in place.

**Turbine section.** The section of the engine that converts high pressure high temperature gas into rotational energy.

**Turbocharger.** An air compressor driven by exhaust gases, which increases the pressure of the air going into the engine through the carburetor or fuel injection system.

**Turbofan engine.** A turbojet engine in which additional propulsive thrust is gained by extending a portion of the compressor or turbine blades outside the inner engine case. The extended blades propel bypass air along the engine axis but between the inner and outer casing. The air is not combusted but does provide additional thrust.

**Turbojet engine.** A jet engine incorporating a turbine-driven air compressor to take in and compress air for the combustion of fuel, the gases of combustion being used both to rotate the turbine and create a thrust producing jet.

**Turboprop engine.** A turbine engine that drives a propeller through a reduction gearing arrangement. Most of the energy in the exhaust gases is converted into torque, rather than its acceleration being used to propel the aircraft.

**Turbulence.** An occurrence in which a flow of fluid is unsteady.

**Turn coordinator.** A rate gyro that senses both roll and yaw due to the gimbal being canted. Has largely replaced the turn-and-slip indicator in modern aircraft.

**Turn-and-slip indicator.** A flight instrument consisting of a rate gyro to indicate the rate of yaw and a curved glass inclinometer to indicate the relationship between gravity and centrifugal force. The turn-and-slip indicator indicates the relationship between angle of bank and rate of yaw. Also called a turn-and-bank indicator.

**Turning error.** One of the errors inherent in a magnetic compass caused by the dip compensating weight. It shows up only on turns to or from northerly headings in the Northern Hemisphere and southerly headings in the Southern Hemisphere. Turning error causes the compass to lead turns to the north or south and lag turns away from the north or south.

## U

**Ultimate load factor.** In stress analysis, the load that causes physical breakdown in an aircraft or aircraft component during a strength test, or the load that according to computations, should cause such a breakdown.

**Unfeathering accumulator.** Tanks that hold oil under pressure which can be used to unfeather a propeller.

**UNICOM.** A nongovernment air/ground radio communication station which may provide airport information at public use airports where there is no tower or FSS.

**Unusable fuel.** Fuel that cannot be consumed by the engine. This fuel is considered part of the empty weight of the aircraft.

**Useful load.** The weight of the pilot, copilot, passengers, baggage, usable fuel, and drainable oil. It is the basic empty weight subtracted from the maximum allowable gross weight. This term applies to general aviation aircraft only.

**Utility category.** An airplane that has a seating configuration, excluding pilot seats, of nine or less, a maximum certificated takeoff weight of 12,500 pounds or less, and intended for limited acrobatic operation.



## V

**V<sub>1</sub>.** Critical engine failure speed or takeoff decision speed. It is the speed at which the pilot is to continue the takeoff in the event of an engine failure or other serious emergency. At speeds less than V<sub>1</sub>, it is considered safer to stop the aircraft within the accelerate-stop distance. It is also the minimum speed in the takeoff, following a failure of the critical engine at V<sub>EF</sub>, at which the pilot can continue the takeoff and achieve the required height above the takeoff surface within the takeoff distance.

**V<sub>2</sub>.** takeoff safety speed, or a referenced airspeed obtained after lift-off at which the required one engine-inoperative climb performance can be achieved.

**V<sub>A</sub>.** The design maneuvering speed. This is the “rough air” speed and the maximum speed for abrupt maneuvers. If during flight, rough air or severe turbulence is encountered, reduce the airspeed to maneuvering speed or less to minimize stress on the airplane structure. It is important to consider weight when referencing this speed. For example, V<sub>A</sub> may be 100 knots when an airplane is heavily loaded, but only 90 knots when the load is light.

**Vapor lock.** A condition in which air enters the fuel system and it may be difficult, or impossible, to restart the engine. Vapor lock may occur as a result of running a fuel tank completely dry, allowing air to enter the fuel system. On fuel-injected engines, the fuel may become so hot it vaporizes in the fuel line, not allowing fuel to reach the cylinders.

**V-bars.** The flight director displays on the attitude indicator that provide control guidance to the pilot.

**Vector.** A force vector is a graphic representation of a force and shows both the magnitude and direction of the force.

**Velocity.** The speed or rate of movement in a certain direction.

**Vertical axis.** An imaginary line passing vertically through the center of gravity of an aircraft. The vertical axis is called the z-axis or the yaw axis.

**Vertical card compass.** A magnetic compass that consists of an azimuth on a vertical card, resembling a heading indicator with a fixed miniature airplane to accurately present the heading of the aircraft. The design uses eddy current damping to minimize lead and lag during turns.

**Vertical speed indicator (VSI).** An instrument that uses static pressure to display a rate of climb or descent in feet per minute. The VSI can also sometimes be called a vertical velocity indicator (VVI).

**Vertical stability.** Stability about an aircraft’s vertical axis. Also called yawing or directional stability.

**V<sub>FE</sub>.** The maximum speed with the flaps extended. The upper limit of the white arc.

**V<sub>FO</sub>.** The maximum speed that the flaps can be extended or retracted.

**VFR Terminal Area Charts (1:250,000).** Depict Class B airspace which provides for the control or segregation of all the aircraft within the Class B airspace. The chart depicts topographic information and aeronautical information which includes visual and radio aids to navigation, airports, controlled airspace, restricted areas, obstructions, and related data.

**V-G diagram.** A chart that relates velocity to load factor. It is valid only for a specific weight, configuration, and altitude and shows the maximum amount of positive or negative lift the airplane is capable of generating at a given speed. Also shows the safe load factor limits and the load factor that the aircraft can sustain at various speeds.

**Visual approach slope indicator (VASI).** The most common visual glidepath system in use. The VASI provides obstruction clearance within 10° of the extended runway centerline, and to 4 nautical miles (NM) from the runway threshold.

**Visual Flight Rules (VFR).** Code of Federal Regulations that govern the procedures for conducting flight under visual conditions.

**V<sub>LE</sub>.** Landing gear extended speed. The maximum speed at which an airplane can be safely flown with the landing gear extended.

**V<sub>LO</sub>.** Landing gear operating speed. The maximum speed for extending or retracting the landing gear if using an airplane equipped with retractable landing gear.

**V<sub>LOF</sub>.** Lift-off speed. The speed at which the aircraft departs the runway during takeoff.

**V<sub>MC</sub>.** Minimum control airspeed. This is the minimum flight speed at which a twin-engine airplane can be satisfactorily controlled when an engine suddenly becomes inoperative and the remaining engine is at takeoff power.

**V<sub>MD</sub>.** Minimum drag speed.

**V<sub>MO</sub>.** Maximum operating speed expressed in knots.

**V<sub>NE</sub>.** Never-exceed speed. Operating above this speed is prohibited since it may result in damage or structural failure. The red line on the airspeed indicator.

**V<sub>NO</sub>.** Maximum structural cruising speed. Do not exceed this speed except in smooth air. The upper limit of the green arc.

**V<sub>P</sub>.** Minimum dynamic hydroplaning speed. The minimum speed required to start dynamic hydroplaning.

**V<sub>R</sub>.** Rotation speed. The speed that the pilot begins rotating the aircraft prior to lift-off.

**V<sub>S0</sub>.** Stalling speed or the minimum steady flight speed in the landing configuration. In small airplanes, this is the power-off stall speed at the maximum landing weight in the landing configuration (gear and flaps down). The lower limit of the white arc.

**V<sub>S1</sub>.** Stalling speed or the minimum steady flight speed obtained in a specified configuration. For most airplanes, this is the power-off stall speed at the maximum takeoff weight in the clean configuration (gear up, if retractable, and flaps up). The lower limit of the green arc.

**V-speeds.** Designated speeds for a specific flight condition.

**V<sub>SSE</sub>.** Safe, intentional one-engine inoperative speed. The minimum speed to intentionally render the critical engine inoperative.

**V-tail.** A design which utilizes two slanted tail surfaces to perform the same functions as the surfaces of a conventional elevator and rudder configuration. The fixed surfaces act as both horizontal and vertical stabilizers.

**V<sub>X</sub>.** Best angle-of-climb speed. The airspeed at which an airplane gains the greatest amount of altitude in a given distance. It is used during a short-field takeoff to clear an obstacle.

**V<sub>XSE</sub>.** Best angle of climb speed with one engine inoperative. The airspeed at which an airplane gains the greatest amount of altitude in a given distance in a light, twin-engine airplane following an engine failure.

**V<sub>Y</sub>.** Best rate-of-climb speed. This airspeed provides the most altitude gain in a given period of time.

**V<sub>YSE</sub>.** Best rate-of-climb speed with one engine inoperative. This airspeed provides the most altitude gain in a given period of time in a light, twin-engine airplane following an engine failure.

## W

**Wake turbulence.** Wingtip vortices that are created when an airplane generates lift. When an airplane generates lift, air spills over the wingtips from the high pressure areas below the wings to the low pressure areas above them. This flow causes rapidly rotating whirlpools of air called wingtip vortices or wake turbulence.

**Waste gate.** A controllable valve in the tailpipe of an aircraft reciprocating engine equipped with a turbocharger. The valve is controlled to vary the amount of exhaust gases forced through the turbocharger turbine.

**Weathervane.** The tendency of the aircraft to turn into the relative wind.

**Weight and balance.** The aircraft is said to be in weight and balance when the gross weight of the aircraft is under the max gross weight, and the center of gravity is within limits and will remain in limits for the duration of the flight.

**Weight.** A measure of the heaviness of an object. The force by which a body is attracted toward the center of the earth (or another celestial body) by gravity. Weight is equal to the mass of the body times the local value of gravitational acceleration. One of the four main forces acting on an aircraft. Equivalent to the actual weight of the aircraft. It acts downward through the aircraft's center of gravity toward the center of the earth. Weight opposes lift.

**Wheelbarrowing.** A condition caused when forward yoke or stick pressure during takeoff or landing causes the aircraft to ride on the nose-wheel alone.

**Wind correction angle.** Correction applied to the course to establish a heading so that track will coincide with course.

**Wind direction indicators.** Indicators that include a wind sock, wind tee, or tetrahedron. Visual reference will determine wind direction and runway in use.

**Wind shear.** A sudden, drastic shift in wind speed, direction, or both that may occur in the horizontal or vertical plane.

**Windmilling.** When the air moving through a propeller creates the rotational energy.

**Windsock.** A truncated cloth cone open at both ends and mounted on a freewheeling pivot that indicates the direction from which the wind is blowing.

**Wing area.** The total surface of the wing (square feet), which includes control surfaces and may include wing area covered by the fuselage (main body of the airplane), and engine nacelles.

**Wing span.** The maximum distance from wingtip to wingtip.

**Wing twist.** A design feature incorporated into some wings to improve aileron control effectiveness at high angles of attack during an approach to a stall.

**Wing.** Airfoil attached to each side of the fuselage and are the main lifting surfaces that support the airplane in flight.

**Wingtip vortices.** The rapidly rotating air that spills over an airplane's wings during flight. The intensity of the turbulence depends on the airplane's weight, speed, and configuration. It is also referred to as wake turbulence. Vortices from heavy aircraft may be extremely hazardous to small aircraft.

## Y

**Yaw string.** A string on the nose or windshield of an aircraft in view of the pilot that indicates any slipping or skidding of the aircraft.

**Yaw.** Rotation about the vertical axis of an aircraft.

## **Z**

**Zero fuel weight.** The weight of the aircraft to include all useful load except fuel.

**Zero sideslip.** A maneuver in a twin-engine airplane with one engine inoperative that involves a small amount of bank and slightly uncoordinated flight to align the fuselage with the direction of travel and minimize drag.

**Zero thrust (simulated feather).** An engine configuration with a low power setting that simulates a propeller feathered condition.

# Airplane Flying Handbook (FAA-H-8083-3C)

## Index

### A

|                                                                 |                                                                                                                             |
|-----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Abnormal engine instrument indication                           | 18-16                                                                                                                       |
| Absence of propeller:                                           |                                                                                                                             |
| Drag                                                            | 16-4                                                                                                                        |
| Effect                                                          | 16-4                                                                                                                        |
| Slipstream                                                      | 16-4                                                                                                                        |
| Academic material (knowledge and risk management)               | 5-5                                                                                                                         |
| Prevention through ADM and risk management                      | 5-6                                                                                                                         |
| Prevention through proportional counter-response                | 5-6                                                                                                                         |
| Recovery                                                        | 5-6                                                                                                                         |
| Accelerated stalls                                              | 5-19                                                                                                                        |
| Accelerate-go distance                                          | 13-10, 13-12                                                                                                                |
| Accelerate-stop distance                                        | 13-10, 13-12, 13-15, 16-12                                                                                                  |
| After-landing                                                   | 1-15, 2-22                                                                                                                  |
| After-landing roll                                              | 2-22, 9-2, 9-9, 9-10, 9-16, 9-18, 9-21, 9-22, 9-23, 9-36, 9-38, 14-6, 14-7, 14-8                                            |
| Aircraft energy management                                      | 4-18                                                                                                                        |
| Airframe and systems                                            | 17-5                                                                                                                        |
| Airplane-based UPRT                                             | 5-7                                                                                                                         |
| Airplane configuration                                          | 3-21, 5-19, 6-1, 9-1, 18-4                                                                                                  |
| Airplane equipment and lighting                                 | 11-5                                                                                                                        |
| Airport and navigation lighting aids                            | 11-6                                                                                                                        |
| Airport traffic patterns and operations                         | 8-1                                                                                                                         |
| All-attitude/all-envelope flight training methods               | 5-8                                                                                                                         |
| All-engine service ceiling of multiengine airplanes             | 13-11                                                                                                                       |
| Alternator/generator                                            | 2-12, 13-6, 13-9, 18-10                                                                                                     |
| Angle of attack                                                 | 1-13, 1-14, 4-5, 5-1, 5-9, 5-10, 5-11, 5-12, 6-1, 9-8, 10-2, 12-1, 12-6, 13-19, 13-25, 13-26, 14-1, 15-8, 16-6, 16-7, 17-15 |
| Anti-icing/deicing                                              | 13-9, 13-10                                                                                                                 |
| Approach (in an emergency)                                      | 18-4                                                                                                                        |
| Approach and landing (night)                                    | 11-10                                                                                                                       |
| Night emergencies                                               | 11-13                                                                                                                       |
| Approach and landing (sport)                                    | 17-14                                                                                                                       |
| Approaches to stalls (impending stalls), power-on, or power-off | 5-17                                                                                                                        |
| Attitude and sink rate control                                  | 18-4                                                                                                                        |
| Attitude flying                                                 | 3-4                                                                                                                         |

|                                    |                                                                                                                                                                                                                                                                  |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Autoland systems                   | <b>18-22</b>                                                                                                                                                                                                                                                     |
| <b>B</b>                           |                                                                                                                                                                                                                                                                  |
| Ballistic parachute systems        | <b>18-22</b>                                                                                                                                                                                                                                                     |
| Ballooning during round out        | <b>9-32</b>                                                                                                                                                                                                                                                      |
| Bank control                       | 3-5, 6-5, 18-18                                                                                                                                                                                                                                                  |
| Basic safety concepts              | <b>18-2</b>                                                                                                                                                                                                                                                      |
| Before start and starting engine   | <b>17-12</b>                                                                                                                                                                                                                                                     |
| Before-take-off check              | <b>2-21, 13-11, 13-15, 17-4</b>                                                                                                                                                                                                                                  |
| Avionics                           | 2-22                                                                                                                                                                                                                                                             |
| Electrical system                  | 2-21                                                                                                                                                                                                                                                             |
| Engine operation                   | 2-21                                                                                                                                                                                                                                                             |
| Flight controls                    | 2-21                                                                                                                                                                                                                                                             |
| Flight instruments                 | 2-22                                                                                                                                                                                                                                                             |
| Fuel system                        | 2-21                                                                                                                                                                                                                                                             |
| Takeoff briefing                   | 2-22                                                                                                                                                                                                                                                             |
| Trim                               | 2-21                                                                                                                                                                                                                                                             |
| Vacuum system                      | 2-22                                                                                                                                                                                                                                                             |
| Bouncing during touchdown          | <b>9-33</b>                                                                                                                                                                                                                                                      |
| Brakes                             | <b>2-10, 2-11, 2-16, 2-17, 2-19, 2-20, 2-21, 2-22, 2-23, 6-3, 6-11, 9-9, 9-10, 9-18, 9-20, 9-23, 9-24, 9-36, 9-37, 9-38, 11-8, 13-14, 13-15, 13-16, 13-17, 13-21, 14-1, 14-2, 14-3, 14-7, 14-8, 16-9, 16-10, 16-12, 16-14, 16-15, 16-16, 16-19, 16-24, 17-12</b> |
| <b>C</b>                           |                                                                                                                                                                                                                                                                  |
| Cabin fire                         | <b>18-9, 18-10</b>                                                                                                                                                                                                                                               |
| Captain's briefing                 | <b>16-13, 16-14</b>                                                                                                                                                                                                                                              |
| Cascade reversers                  | 16-11                                                                                                                                                                                                                                                            |
| Chandelle                          | <b>10-4, 10-5, 10-6</b>                                                                                                                                                                                                                                          |
| Climb gradient                     | 12-16, 13-2, 13-3, 13-10, 13-11, 13-12, 16-20                                                                                                                                                                                                                    |
| Climbs and climbing turns          | <b>3-17</b>                                                                                                                                                                                                                                                      |
| Climbing turns                     | <b>3-20</b>                                                                                                                                                                                                                                                      |
| Establishing a climb               | <b>3-19</b>                                                                                                                                                                                                                                                      |
| Best angle of climb ( $V_X$ )      | 3-17, 3-18, 4-17, 13-1, 16-17                                                                                                                                                                                                                                    |
| Best rate of climb ( $V_Y$ )       | 3-17, 3-18, 4-17, 6-4, 6-6, 13-1, 13-16, 16-17                                                                                                                                                                                                                   |
| Normal climb                       | 3-17, 6-12, 6-13, 11-8                                                                                                                                                                                                                                           |
| Combustion heater                  | <b>13-8</b>                                                                                                                                                                                                                                                      |
| Constant radius turn during flight | <b>7-3</b>                                                                                                                                                                                                                                                       |
| Construction                       | <b>17-5</b>                                                                                                                                                                                                                                                      |
| Aluminum                           | 17-5                                                                                                                                                                                                                                                             |
| Composite                          | 17-5                                                                                                                                                                                                                                                             |



|                                                   |                                                                                                                                                   |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Steel tube and fabric                             | 17-5                                                                                                                                              |
| Continuous ignition                               | 15-1                                                                                                                                              |
| Controllable-pitch propeller                      | 3-19, 12-1, <b>12-5</b> , 12-6                                                                                                                    |
| Blade angle control                               | 12-6, <b>12-7</b>                                                                                                                                 |
| Climb                                             | 12-6, 12-7                                                                                                                                        |
| Constant-speed propeller                          | 10-5, <b>12-5</b> , 12-6, 12-7, 12-8, 13-3, 13-5, 13-9, 15-6, 18-9                                                                                |
| Constant-speed propeller operation                | <b>12-8</b>                                                                                                                                       |
| Cruise                                            | 12-7                                                                                                                                              |
| Fixed-pitch propellers                            | 3-3, 10-5, 12-5, 12-8, 13-9                                                                                                                       |
| Governing range                                   | <b>12-8</b> , 15-5                                                                                                                                |
| Takeoff                                           | 12-6                                                                                                                                              |
| Control touch                                     | 1-1, 16-16                                                                                                                                        |
| Coordinated flight                                | 3-11, 3-12, 3-13, 3-23, 5-1, 5-6, <b>5-8</b> , 5-9, 5-11, 5-13, 5-16, 5-17, 5-18, 5-20, 6-5, 6-6, 6-14, 7-17, 9-3, 9-13, 10-5, 10-7, 13-21, 13-27 |
| Coordination                                      | 1-1                                                                                                                                               |
| Correcting drift during straight-and-level flight | <b>7-2</b>                                                                                                                                        |
| Cross-control stall                               | <b>5-20</b>                                                                                                                                       |
| Crosswind after-landing roll (tailwheel)          | <b>14-7</b>                                                                                                                                       |
| Crosswind approach and landing                    | 9-3, 9-10, <b>9-15</b> , 9-17, <b>13-21</b> , 17-4                                                                                                |
| Crosswind after landing roll                      | <b>9-18</b>                                                                                                                                       |
| Crosswind final approach                          | <b>9-15</b>                                                                                                                                       |
| Crab method                                       | 9-15                                                                                                                                              |
| Wing-low (sideslip) method                        | 9-15, 9-16                                                                                                                                        |
| Crosswind round out (flare)                       | <b>9-17</b>                                                                                                                                       |
| Crosswind touchdown                               | <b>9-17</b>                                                                                                                                       |
| Maximum safe crosswind velocities                 | <b>9-18</b>                                                                                                                                       |
| Crosswind takeoff                                 | <b>6-6</b> , <b>13-15</b> , <b>14-3</b>                                                                                                           |
| Initial climb                                     | <b>6-8</b> , 13-15, 13-16                                                                                                                         |
| Lift-off                                          | <b>6-7</b>                                                                                                                                        |
| Takeoff roll                                      | <b>6-6</b>                                                                                                                                        |
| Cruise                                            | <b>17-13</b>                                                                                                                                      |

## D

|                                  |                                                     |
|----------------------------------|-----------------------------------------------------|
| Defining an airplane upset       | <b>5-1</b>                                          |
| Descents and descending turns    | <b>3-20</b> , 3-24, 5-10                            |
| Descent at minimum safe airspeed | 3-21                                                |
| Emergency descent                | 3-21, 10-3, 15-15, <b>18-8</b> , 18-9, 18-10, 18-22 |
| Partial power descent            | 3-21                                                |
| Detonation                       | 2-7, 2-8, 12-8, 12-11                               |

|                                                  |                                                                                                                                                                                                                                                                        |
|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Directional control                              | 2-19, 3-9, 5-11, 5-17, 5-22, 6-1, 6-14, 9-9, 9-18, 9-23, 9-33, 9-34, 9-37, 9-38, 13-2, 13-15, 13-17, 13-18, 13-23, 13-25, 13-26, 13-29, 13-30, 13-31, 13-32, 13-33, 13-36, 13-37, 14-1, 14-2, <b>14-3</b> , 14-5, 14-6, 14-7, 16-11, 16-14, 16-16, 16-24, 18-12, 18-13 |
| Door opening in-flight                           | <b>18-17</b>                                                                                                                                                                                                                                                           |
| Drag devices                                     | 4-4, <b>16-9</b> , 16-11                                                                                                                                                                                                                                               |
| Drift and ground track control                   | <b>7-2</b>                                                                                                                                                                                                                                                             |
| <b>E</b>                                         |                                                                                                                                                                                                                                                                        |
| Effect and use of flight controls                | <b>3-1</b>                                                                                                                                                                                                                                                             |
| Feel of the airplane                             | <b>3-3</b>                                                                                                                                                                                                                                                             |
| Electrical fires                                 | 18-9                                                                                                                                                                                                                                                                   |
| Elementary eights                                | <b>7-10</b> , 7-13,                                                                                                                                                                                                                                                    |
| Eights across a road                             | 7-10, <b>7-12</b>                                                                                                                                                                                                                                                      |
| Eights along a road                              | 7-10, <b>7-11</b> , 7-12                                                                                                                                                                                                                                               |
| Eights around pylons                             | 7-10, <b>7-13</b> , 7-14                                                                                                                                                                                                                                               |
| Eights-on-pylons                                 | <b>7-14</b> , 7-15, 7-16, 7-17, 7-18                                                                                                                                                                                                                                   |
| Elevator trim stall                              | <b>5-20</b> , 5-21                                                                                                                                                                                                                                                     |
| Emergencies                                      | 3-23, 9-29, 11-5, 11-13, 13-35, 13-36, 15-13, 15-14, 15-15, <b>17-14</b> ,                                                                                                                                                                                             |
| Emergency approaches and landings (simulated)    | <b>9-28</b>                                                                                                                                                                                                                                                            |
| Emergency descents                               | 3-21, 10-3, 15-15, <b>18-8</b> , 18-9, 18-10, 18-22                                                                                                                                                                                                                    |
| Emergency landings                               | 9-28, <b>18-1</b>                                                                                                                                                                                                                                                      |
| Psychological hazards                            | <b>18-1</b>                                                                                                                                                                                                                                                            |
| Types of emergency landings                      | <b>18-1</b>                                                                                                                                                                                                                                                            |
| Ditching                                         | 3-23, 18-1, <b>18-7</b>                                                                                                                                                                                                                                                |
| Forced landing                                   | 7-2, 9-12, 11-13, 12-6                                                                                                                                                                                                                                                 |
| Precautionary landing                            | 18-1, 18-8                                                                                                                                                                                                                                                             |
| Emergency situations                             | 11-1, 17-14, 18-1, 18-22, 18-23                                                                                                                                                                                                                                        |
| Energy balance equation                          | 4-3, 4-4, 4-18                                                                                                                                                                                                                                                         |
| Energy error                                     | 4-12, 4-14, 4-19                                                                                                                                                                                                                                                       |
| Energy distribution error                        | 4-12, 4-13, 4-19                                                                                                                                                                                                                                                       |
| Total energy error                               | 4-12, 4-19                                                                                                                                                                                                                                                             |
| Energy exchange                                  | 4-2, 4-4, 4-5, 4-6, 4-8, 4-10, 4-18                                                                                                                                                                                                                                    |
| Energy height or total specific energy ( $E_s$ ) | 4-7, 4-9, 4-19                                                                                                                                                                                                                                                         |
| Energy state                                     | 4-1, 4-2, 4-3, 4-6, 4-7, 4-8, 4-9, 4-10, 4-11, 4-12, 4-14, 4-18, 4-19, 5-13, 16-18                                                                                                                                                                                     |
| Energy system                                    | 4-1, 4-18                                                                                                                                                                                                                                                              |
| Engine and propeller                             | <b>2-11</b> , 3-3, 6-1, 6-3, 13-12, 13-34, 15-3, 15-6                                                                                                                                                                                                                  |
| Engine failure:                                  |                                                                                                                                                                                                                                                                        |
| After lift-off                                   | 13-11                                                                                                                                                                                                                                                                  |
| After takeoff                                    | 13-31, 13-32, 13-33                                                                                                                                                                                                                                                    |

|                                         |                                                                                  |
|-----------------------------------------|----------------------------------------------------------------------------------|
| After takeoff (single-engine)           | <b>18-7</b>                                                                      |
| During flight                           | <b>13-34</b>                                                                     |
| Engine fire                             | 13-32, 18-8, <b>18-9</b>                                                         |
| Engine inoperative approach and landing | <b>13-34</b>                                                                     |
| Engine inoperative flight principles    | <b>13-23</b>                                                                     |
| Engines                                 | <b>17-6</b>                                                                      |
| Engine shutdown                         | <b>2-23</b>                                                                      |
| Engine starting                         | <b>2-16</b>                                                                      |
| Environmental factors                   | 2-13, <b>5-2</b>                                                                 |
| Exhaust gas temperature (EGT)           | 12-10, 12-11, 13-15                                                              |
| <b>F</b>                                |                                                                                  |
| False start                             | 15-12                                                                            |
| Faulty approaches and landings          | <b>9-30</b>                                                                      |
| Feathering                              | 2-21, 9-25, 13-3, 13-5, 13-6, 13-7, 13-29, 13-30, 13-35, 13-36, 15-1, 15-5, 18-9 |
| Flap effectiveness                      | <b>12-3</b>                                                                      |
| Flap control malfunction/failure        | <b>18-10</b>                                                                     |
| Asymmetric (split) flap                 | <b>18-11</b>                                                                     |
| Landing gear malfunction                | <b>18-12</b>                                                                     |
| Loss of elevator control                | <b>18-11</b>                                                                     |
| Total flap failure                      | <b>18-10</b>                                                                     |
| Flight director/autopilot               | <b>13-8</b>                                                                      |
| Flight environment                      | 2-1, 15-13, 15-14, <b>17-8</b>                                                   |
| Flight standards service                | <b>1-5</b>                                                                       |
| Floating during round out               | <b>9-32</b>                                                                      |
| Forward slip                            | 9-4, 9-12, 9-13, 9-14, <b>9-15</b> , 9-26, 9-30                                  |
| Four fundamentals                       | <b>3-1</b> , 7-1                                                                 |
| Climbs                                  | <b>3-17</b>                                                                      |
| Descents                                | <b>3-20</b>                                                                      |
| Straight-and-level                      | <b>3-6</b>                                                                       |
| Turns                                   | <b>3-11</b>                                                                      |
| Fowler flap                             | 12-4                                                                             |
| Fuel and oil                            | <b>2-7</b>                                                                       |
| Fuel crossfeed                          | <b>13-7</b>                                                                      |
| Full stalls:                            |                                                                                  |
| Power-off                               | <b>5-17</b>                                                                      |
| Power-on                                | <b>5-18</b>                                                                      |
| Function of flaps                       | <b>12-1</b>                                                                      |
| Fundamentals of stall recovery          | <b>5-15</b>                                                                      |

## G

|                    |                                                                                                                                                                                                                |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gas turbine engine | <b>15-1</b> , 15-2, 15-8, 16-2                                                                                                                                                                                 |
| Glides             | <b>3-21</b> , 3-23, 9-24                                                                                                                                                                                       |
| Gliding turns      | <b>3-23</b> , 3-24                                                                                                                                                                                             |
| Go-around          | <b>4-17</b> , 5-9, 5-17, 5-20, 5-21, 8-4, 9-6, <b>9-10</b> , 9-11, 9-12, 9-22, 9-30, 9-31, 9-32, 9-33, 9-34, 9-35, 12-4, 12-5, <b>13-22</b> , 13-23, 13-30, 13-33, 13-35, 14-5, 14-6, 16-4, 16-20, 16-22, 17-4 |
| Rejected landings  | <b>9-10</b> , 9-12                                                                                                                                                                                             |
| Attitude           | <b>9-11</b>                                                                                                                                                                                                    |
| Configuration      | <b>9-11</b>                                                                                                                                                                                                    |
| Ground effect      | <b>9-12</b>                                                                                                                                                                                                    |
| Power              | <b>9-11</b>                                                                                                                                                                                                    |
| Ground loop        | 2-19, 9-9, <b>9-36</b> , 9-37, 14-6, <b>14-8</b> , 18-5                                                                                                                                                        |
| Ground operation   | 2-1, 2-12, <b>2-14</b> , <b>13-14</b> , 14-1, 14-8, 15-3, 15-6, 17-4                                                                                                                                           |

## H

|                              |                                                           |
|------------------------------|-----------------------------------------------------------|
| Hand propping                | <b>2-16</b> , 2-17                                        |
| Hard landing                 | 9-20, 9-22, 9-23, <b>9-35</b> , 12-4, 13-22, 16-23, 17-15 |
| High final approach          | <b>9-30</b>                                               |
| High-performance airplane    | 12-1, 12-17, 12-18                                        |
| High round out               | 9-10, <b>9-31</b>                                         |
| Human factors                | <b>5-2</b>                                                |
| Diversion of attention       | <b>5-2</b>                                                |
| IMC                          | <b>5-2</b>                                                |
| Sensory overload/deprivation | <b>5-3</b>                                                |
| Spatial disorientation       | <b>5-3</b>                                                |
| Startle response             | <b>5-3</b>                                                |
| Surprise response            | <b>5-3</b>                                                |
| Task saturation              | <b>5-3</b>                                                |
| VMC to IMC                   | <b>5-2</b>                                                |
| Hydraulic pump               | 12-12, 12-14, 13-30, 18-9                                 |
| Hydroplaning                 | <b>9-37</b> , 9-38                                        |
| Dynamic hydroplaning         | <b>9-37</b>                                               |
| Reverted rubber hydroplaning | <b>9-37</b>                                               |
| Viscous hydroplaning         | <b>9-37</b>                                               |

## I

|                             |                                   |
|-----------------------------|-----------------------------------|
| Impossible turn             | 18-7                              |
| Inadvertent flight into IMC | 5-1, 5-2, 5-3, 5-26, <b>18-17</b> |
| Attitude control            | 3-5, 18-17, <b>18-18</b>          |

|                                            |                                                                                                                                                              |
|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Climbs                                     | <b>18-20</b>                                                                                                                                                 |
| Combined maneuvers                         | <b>18-21</b>                                                                                                                                                 |
| Descents                                   | <b>18-20</b>                                                                                                                                                 |
| Maintaining airplane control               | <b>18-18</b>                                                                                                                                                 |
| Recognition                                | <b>18-17</b>                                                                                                                                                 |
| Transition to visual flight                | <b>18-22</b>                                                                                                                                                 |
| Turns                                      | <b>18-19</b>                                                                                                                                                 |
| In-flight fire                             | 15-14, <b>18-9</b>                                                                                                                                           |
| Initial climb                              | 6-1, <b>6-5</b> , 6-6, <b>6-8</b> , 6-10, 6-11, <b>6-12</b> , <b>6-13</b> , 6-14, 12-16, 13-15, 13-16, 13-17, 13-29, 14-4, 15-2, 15-15, 16-2, <b>16-17</b> , |
| Inside the airplane                        | 2-21, 6-12, <b>17-9</b>                                                                                                                                      |
| Instrumentation                            | 3-3, 3-5, 5-2, 5-4, 11-4, <b>17-7</b> , 18-15, 18-23                                                                                                         |
| Integrated flight instruction              | <b>3-5</b> , 3-6                                                                                                                                             |
| Intentional slips                          | <b>9-12</b>                                                                                                                                                  |
| Intentional spins                          | <b>5-25</b> , 5-26                                                                                                                                           |
| Interstage turbine temperature (ITT)       | 15-4, 15-5, 15-8                                                                                                                                             |
| Irreversible deceleration and/or sink rate | 4-1, 4-5, 4-11, <b>4-14</b> , 4-17, 4-19                                                                                                                     |

## J

|                                   |                                                        |
|-----------------------------------|--------------------------------------------------------|
| Jet airplane approach and landing | 16-17, 16-18, 16-19, 16-20, 16-21, 16-22, 16-23, 16-24 |
| Approach speed                    | <b>16-22</b>                                           |
| Glidepath control                 | <b>16-22</b>                                           |
| Landing requirements              | 16-19                                                  |
| Landing speeds                    | <b>16-20</b>                                           |
| Approach climb                    | 16-20                                                  |
| Landing climb                     | 16-20                                                  |
| V <sub>REF</sub>                  | 16-20                                                  |
| V <sub>SO</sub>                   | 16-20                                                  |
| Stabilized approach               | <b>16-21</b>                                           |
| The flare                         | <b>16-23</b>                                           |
| Touchdown and rollout             | <b>16-24</b>                                           |
| Jet engine basics                 | <b>16-1</b>                                            |
| Jet engine efficiency             | <b>16-4</b>                                            |
| Jet engine ignition               | 16-1                                                   |

## K

|                |                                                |
|----------------|------------------------------------------------|
| Kinetic energy | 4-1, 4-7, 4-9, 4-18, 4-19, 16-10, 16-18, 16-19 |
|----------------|------------------------------------------------|

## L

|         |            |
|---------|------------|
| Landing | <b>9-2</b> |
|---------|------------|



|                                                                            |                                               |
|----------------------------------------------------------------------------|-----------------------------------------------|
| Landing gear                                                               | <b>2-10, 14-1</b>                             |
| Instability                                                                | <b>14-1</b>                                   |
| Landing gear control selected up, single-engine climb performance adequate | <b>13-31</b>                                  |
| Checklist                                                                  | <b>13-32</b>                                  |
| Climb                                                                      | <b>13-32</b>                                  |
| Configuration                                                              | <b>13-31</b>                                  |
| Control                                                                    | <b>13-31</b>                                  |
| Landing gear selected up, single-engine climb performance inadequate       | 13-30                                         |
| Landing gear down                                                          | 2-5, 13-16, <b>13-30</b>                      |
| Late or rapid round out                                                    | <b>9-31</b>                                   |
| Lazy eight                                                                 | <b>10-6, 10-7</b>                             |
| Level-off and cruise                                                       | 3-20, 12-8                                    |
| Level turns                                                                | <b>3-11</b>                                   |
| Establishing a turn                                                        | <b>3-15</b>                                   |
| Medium turns                                                               | 3-12                                          |
| Shallow turns                                                              | 3-12                                          |
| Steep turns                                                                | 3-12                                          |
| Turn radius                                                                | <b>3-14</b>                                   |
| Liftoff                                                                    | <b>6-4</b>                                    |
| Rotation                                                                   | 6-5                                           |
| Light sport airplane (LSA) background                                      | <b>17-1</b>                                   |
| Loss of control in-flight (LOC-I)                                          | 4-1, 4-19, 5-1, 5-2, 5-3, 5-4, 5-5, 5-6, 5-27 |
| Low final approach                                                         | <b>9-30</b>                                   |
| Low speed flight                                                           | 12-1, <b>16-6</b>                             |
| LSA maintenance                                                            | 17-4, <b>17-5</b>                             |
| LSA synopsis                                                               | <b>17-3</b>                                   |

## M

|                                                         |                     |
|---------------------------------------------------------|---------------------|
| Mach buffet boundaries                                  | 16-6                |
| Maneuvering by reference to ground objects              | <b>7-1</b>          |
| Minimum equipment list and configuration deviation list | 16-24, <b>16-25</b> |
| Multiengine training considerations                     | <b>13-35</b>        |

## N

|                     |              |
|---------------------|--------------|
| Night illusions     | <b>11-4</b>  |
| Black-hole approach | 11-5         |
| Visual autokinesis  | <b>11-4</b>  |
| Night vision        | <b>11-1</b>  |
| Noise abatement     | <b>16-14</b> |

|                                        |                                                                                                          |
|----------------------------------------|----------------------------------------------------------------------------------------------------------|
| Normal and crosswind takeoff and climb | <b>13-15, 17-4</b>                                                                                       |
| Normal approach and landing            | <b>9-2, 13-20</b>                                                                                        |
| After-landing roll                     | <b>9-9</b>                                                                                               |
| Base leg                               | <b>9-2</b>                                                                                               |
| Final approach                         | <b>9-3</b>                                                                                               |
| Estimating height and movement         | <b>9-7</b>                                                                                               |
| Use of flaps                           | <b>9-1</b>                                                                                               |
| Round out (flare)                      | <b>9-8</b>                                                                                               |
| Stabilized approach concept            | <b>9-4</b>                                                                                               |
| Touchdown                              | <b>9-9</b>                                                                                               |
| Wrong surface landing avoidance        | <b>9-4</b>                                                                                               |
| Normal takeoff                         | <b>6-3</b>                                                                                               |
| Initial climb                          | <b>6-5</b>                                                                                               |
| Lift-off                               | <b>6-4</b>                                                                                               |
| Takeoff roll                           | <b>6-3</b>                                                                                               |
| Nose baggage compartment               | <b>13-9</b>                                                                                              |
| <b>O</b>                               |                                                                                                          |
| Operating the jet engine               | <b>16-2</b>                                                                                              |
| Operational considerations             | <b>15-11</b>                                                                                             |
| Operation of systems                   | <b>17-4, 13-3</b>                                                                                        |
| Orientation and navigation             | <b>11-9</b>                                                                                              |
| Outer wing surfaces                    | <b>2-6</b>                                                                                               |
| Outside of the airplane                | <b>2-21, 18-18</b>                                                                                       |
| <b>P</b>                               |                                                                                                          |
| Parking                                | <b>2-18, 7-23, 11-8, 16-1, 17-4</b>                                                                      |
| Performance and limitations            | <b>13-10, 17-4</b>                                                                                       |
| Pilot equipment                        | <b>11-5</b>                                                                                              |
| Pilot sensations in jet flying         | <b>16-11</b>                                                                                             |
| Pitch and power                        | <b>9-2, 9-3, 9-4, 9-20, 11-10, 12-4, 17-14</b>                                                           |
| Pitch control                          | <b>3-2, 3-5, 3-17, 3-23, 3-24, 5-10, 5-21, 10-2, 10-3, 10-4, 13-32, 16-12, 16-24, 18-9, 18-11, 18-18</b> |
| Plain (hinge) flap                     | <b>12-3</b>                                                                                              |
| Porpoising                             | <b>9-34, 9-35, 18-13</b>                                                                                 |
| Post-flight                            | <b>2-23, 17-15</b>                                                                                       |
| Securing and servicing                 | <b>2-23</b>                                                                                              |
| Potential energy                       | <b>4-1, 4-10, 4-18, 4-19, 16-18, 16-19</b>                                                               |
| Power available                        | <b>4-5, 4-14, 4-15, 4-16, 4-17, 4-18, 4-19, 13-3, 13-19, 13-29, 13-34, 16-20, 18-4</b>                   |
| Power control                          | <b>3-5, 4-6, 12-10, 16-2</b>                                                                             |

|                                      |                                                     |
|--------------------------------------|-----------------------------------------------------|
| Power-off accuracy approaches        | <b>9-24</b>                                         |
| 90° Power-off approach               | <b>9-25</b> , 9-26, 9-27                            |
| 180° Power-off approach              | 9-25, <b>9-26</b>                                   |
| Power required                       | 4-5, 4-6, 4-15, 4-16, 4-18, 9-11, 13-3, 16-7, 16-11 |
| Preflight                            | <b>17-9</b>                                         |
| Preflight assessment of the aircraft | <b>2-1</b>                                          |
| Preparation and preflight            | <b>11-7</b>                                         |
| Pre-takeoff procedures               | 2-21, 6-1, 13-12, 13-15                             |
| Prior to takeoff                     | <b>6-1</b>                                          |
| Propellers                           | 3-19, 12-5, 12-7, 12-8, 13-3, 13-5, 13-6, 13-7      |
| Propeller synchronization            | <b>13-7</b>                                         |

## R

|                                           |                                                  |
|-------------------------------------------|--------------------------------------------------|
| Recovery from overspeed conditions        | 5-2                                              |
| Rectangular course                        | <b>7-5</b> , 7-6, 7-7, 7-9                       |
| Rejected takeoff                          | <b>13-17</b> , <b>16-15</b> , 16-16              |
| Rejected takeoff/engine failure           | <b>16-14</b>                                     |
| Retractable landing gear                  | 2-10, 5-17, 5-24, 8-3, 12-1, <b>12-12</b> , 18-4 |
| Controls and position indicator           | <b>12-12</b>                                     |
| Emergency gear extension systems          | <b>12-14</b>                                     |
| Landing gear safety devices               | <b>12-12</b>                                     |
| Landing gear systems                      | <b>12-12</b>                                     |
| Electrical landing gear retraction system | 12-12                                            |
| Hydraulic landing gear retraction system  | 12-12                                            |
| Operational procedures                    | <b>12-14</b>                                     |
| Approach and landing                      | <b>12-16</b>                                     |
| Preflight                                 | <b>12-14</b>                                     |
| Takeoff and climb                         | <b>12-15</b>                                     |
| Reverse thrust and beta range             | <b>15-8</b>                                      |
| Risk and resource management              | <b>2-12</b>                                      |
| Identifying the hazard                    | <b>2-12</b>                                      |
| Resource management                       | <b>2-13</b>                                      |
| Aeronautical decision-making              | <b>2-14</b>                                      |
| Flight deck resource management           | 2-14                                             |
| Situational awareness                     | <b>2-13</b>                                      |
| Task management                           | <b>2-14</b>                                      |
| Risk                                      | <b>2-13</b>                                      |
| Risk assessment                           | <b>2-13</b>                                      |
| Role of the FAA                           | <b>1-2</b>                                       |
| Role of the flight instructor             | <b>1-6</b>                                       |

|                                     |          |
|-------------------------------------|----------|
| Role of the pilot examiner          | 1-6      |
| Role of FSTDs and airplanes in UPRT | 5-7, 5-8 |
| Rotation and lift-off               | 16-16    |

## S

|                                                   |                                                                                                                             |
|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Safety considerations                             | 1-10, 8-5, 11-10                                                                                                            |
| Secondary stall                                   | 5-16, 5-18, 5-21, 5-25, 5-26                                                                                                |
| Setting power                                     | 16-2                                                                                                                        |
| Short-field approach and landing                  | 9-20, 9-21, 13-22                                                                                                           |
| Short-field landing                               | 2-22, 9-24, 12-4, 13-22, 14-8                                                                                               |
| Short-field takeoff                               | 6-12, 13-17, 14-4, 17-4                                                                                                     |
| Short-field takeoff and climb                     | 13-17                                                                                                                       |
| Short-field takeoff and maximum performance climb | 6-8                                                                                                                         |
| Initial Climb                                     | 6-12                                                                                                                        |
| Lift-off                                          | 6-12                                                                                                                        |
| Takeoff roll                                      | 6-11                                                                                                                        |
| Sideslip                                          | 5-22, 5-25, 6-6, 6-7, 6-8, 9-12, 9-13, 9-14, 9-15, 9-16, 9-20, 13-21, 13-22, 13-23, 13-25, 13-27, 13-28, 13-29, 13-32, 14-6 |
| Single-engine service ceiling                     | 13-11, 13-36                                                                                                                |
| Slotted flap                                      | 12-4                                                                                                                        |
| Slow acceleration of the jet engine               | 16-3                                                                                                                        |
| Slow final approach                               | 9-31                                                                                                                        |
| Slow flight                                       | 3-6, 5-1, 5-9, 5-10, 5-11, 5-12, 5-15, 5-27, 13-18, 17-13                                                                   |
| Maneuvering in slow flight                        | 5-11                                                                                                                        |
| Soft-field approach and landing                   | 9-23                                                                                                                        |
| Soft-field landing                                | 14-8                                                                                                                        |
| Soft/rough-field takeoff and climb                | 6-13                                                                                                                        |
| Initial climb                                     | 6-13                                                                                                                        |
| Lift-off                                          | 6-13                                                                                                                        |
| Sources of flight training                        | 1-8                                                                                                                         |
| Airman certification standards (ACS)              | 1-9                                                                                                                         |
| Flight safety practices                           | 1-10<br>1-10                                                                                                                |
| Collision avoidance                               | 1-10                                                                                                                        |
| Positive transfer of controls                     | 1-10                                                                                                                        |
| Runway incursion avoidance                        | 1-12                                                                                                                        |
| Stall awareness                                   | 1-13                                                                                                                        |
| Use of checklists                                 | 1-15                                                                                                                        |
| Practical test standards (PTS)                    | 1-9                                                                                                                         |
| Specific excess power ( $P_S$ )                   | 4-3, 4-8, 4-14, 4-16, 4-17, 4-18                                                                                            |

|                                                              |                                                                                                           |
|--------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| Speed margins                                                | <b>16-4</b>                                                                                               |
| Speed sense                                                  | 1-1                                                                                                       |
| Spin awareness                                               | <b>5-22</b> , 5-27, <b>13-18</b> , 17-4                                                                   |
| Spin procedures                                              | <b>5-23</b>                                                                                               |
| Developed phase                                              | <b>5-24</b>                                                                                               |
| Entry phase                                                  | <b>5-24</b>                                                                                               |
| Incipient phase                                              | <b>5-24</b>                                                                                               |
| Recovery phase                                               | <b>5-24</b>                                                                                               |
| Spiral dive                                                  | 5-24, <b>2-26</b> , 5-27                                                                                  |
| Spilt flap                                                   | 12-4, 17-12                                                                                               |
| Sport pilot certificate                                      | 17-2, <b>17-3</b>                                                                                         |
| Stabilized approach                                          | 9-2, <b>9-4</b> , 9-5, 9-6, 9-21, 9-22, 9-30, 11-10, 12-4, 13-20, 13-22, 15-13, 16-4, 16-18, 16-21, 16-22 |
| Stall characteristics                                        | <b>5-15</b> , 5-18, 5-19, 13-14, 13-19, 16-8                                                              |
| Stall recognition                                            | 5-12, <b>5-13</b> , 5-22                                                                                  |
| Angle of attack indicators                                   | <b>5-13</b>                                                                                               |
| Feel                                                         | 5-13                                                                                                      |
| Hearing                                                      | 5-13                                                                                                      |
| Kinesthesia                                                  | 5-13                                                                                                      |
| Vision                                                       | 5-13                                                                                                      |
| Stalls                                                       | <b>5-12</b>                                                                                               |
| Accelerated approach to stall                                | 13-20                                                                                                     |
| Engine inoperative loss of directional control demonstration | 13-16                                                                                                     |
| Full stall                                                   | 5-12, <b>13-20</b>                                                                                        |
| Impending stall                                              | 5-12, 5-13, 5-15, 5-16, <b>5-17</b> , 5-20, 5-21, 13-18, 13-26, 16-8                                      |
| Power-off stalls                                             | <b>5-17</b>                                                                                               |
| Power-on stalls (takeoff and departure)                      | <b>5-18</b>                                                                                               |
| Spin awareness                                               | <b>5-22</b>                                                                                               |
| Stall training                                               | 1-7, 5-9, <b>5-16</b> , 5-20, <b>13-18</b>                                                                |
| Standard traffic patterns                                    | <b>8-1</b> , 8-2, 8-5                                                                                     |
| Base leg                                                     | 8-3, 8-4                                                                                                  |
| Crosswind leg                                                | 8-4                                                                                                       |
| Departure leg                                                | <b>8-4</b>                                                                                                |
| Downwind leg                                                 | 8-3, 8-4, 8-5                                                                                             |
| Entry leg                                                    | 8-3                                                                                                       |
| Starting, taxiing, and runup                                 | <b>11-8</b>                                                                                               |
| Steep spiral                                                 | 4-17, <b>10-3</b> , 10-4                                                                                  |
| Steep turns                                                  | 3-12, 3-14, 3-16, 5-6, 5-19, <b>10-1</b> , 10-2, 10-3, 11-7, 17-4, 17-13, 18-17                           |



|                                               |                                                                                                                                                                                                                  |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Straight-and-level flight                     | 3-1, 3-3, <b>3-6</b> , 3-7, 3-8, 3-16, 3-19, 3-20, 3-25, 7-2, 7-13, 7-16, 10-4, 10-5, 11-7, 13-19, 18-18, 18-20, 18-21                                                                                           |
| Level flight                                  | <b>3-8</b>                                                                                                                                                                                                       |
| Straight flight                               | <b>3-6</b>                                                                                                                                                                                                       |
| S-turns across a road                         | <b>7-8</b> , 7-9, 7-10                                                                                                                                                                                           |
| System malfunctions                           | 9-29, 18-10, <b>18-13</b>                                                                                                                                                                                        |
| Electical system                              | <b>18-13</b> , 18-14                                                                                                                                                                                             |
| Pitot-static system                           | <b>18-14</b>                                                                                                                                                                                                     |
| <b>T</b>                                      |                                                                                                                                                                                                                  |
| Takeoff and climb                             | 5-18, 6-1, 6-2, 6-6, 6-11, 6-13, <b>11-8</b> , 12-4, <b>12-16</b> , 13-10, 13-12, <b>13-15</b> , <b>13-17</b> , 13-33, 15-2, <b>16-12</b> , 16-14, 16-16, 16-17, 17-4, <b>17-12</b> ,                            |
| Takeoff and departure                         | 6-1, <b>13-9</b> , 15-12, , 16-14                                                                                                                                                                                |
| Takeoff checks                                | <b>2-22</b>                                                                                                                                                                                                      |
| Takeoff roll                                  | 2-22, 6-1, <b>6-3</b> , 6-5, <b>6-6</b> , 6-7, 6-10, <b>6-11</b> , <b>6-13</b> , 6-14, 12-6, 13-14, 13-15, 13-30, <b>14-3</b> , 14-4, 16-2, <b>16-12</b> , 16-14, 16-16                                          |
| Ground roll                                   | 2-20, 3-1, 6-1, 6-3, 6-11, 6-14, 9-10, 13-15, 13-35, 14-4, 4-7, 18-5                                                                                                                                             |
| Takeoffs                                      | 5-9, 5-15, 6-1, 6-5, 6-6, 6-8, 6-10, 6-12, 6-13, 8-1, 9-15, 9-18, 11-1, 11-6, 11-7, 11-8, 12-4, 12-9, 13-15, 13-17, 14-1, 14-3, 14-4, 14-8, 15-12, 15-13, 16-14, 16-15, 16-20,                                   |
| Taxi and Taxiing                              | 1-13, 2-14, 2-15, <b>2-18</b> , 2-19, 2-20, 2-21, 2-22, 6-1, 6-6, 6-10, 9-9, 9-36, 11-5 , <b>11-8</b> , 13-14, 13-15, 13-21, 13-36, 14-1, <b>14-2</b> , 14-3, 14-4, 14-8, 15-9, 16-1, 16-12, 16-24, <b>17-12</b> |
| Terrain selection                             | 18-1, <b>18-4</b>                                                                                                                                                                                                |
| Terrain types                                 | <b>18-5</b>                                                                                                                                                                                                      |
| Confined areas                                | <b>18-5</b>                                                                                                                                                                                                      |
| Trees (forest)                                | <b>18-5</b> , 18-6                                                                                                                                                                                               |
| Water (ditching) and snow                     | <b>18-6</b>                                                                                                                                                                                                      |
| Thrust reversers                              | <b>16-10</b> , 16-11, 16-19, 16-24                                                                                                                                                                               |
| Thrust to thrust lever relationship           | <b>16-2</b>                                                                                                                                                                                                      |
| Timing                                        | 1-1, 7-1, 7-7, 7-10, 7-18, 9-15, 9-32, 14-6, 16-16, 18-4                                                                                                                                                         |
| Tires                                         | 2- <b>10</b> , 2-11, 2-22, 2-23, 9-18, 9-23, 9-33, 9-35, 9-37, 14-4, 16-15, 16-16, 16-24, 17-12,                                                                                                                 |
| Total mechanical energy                       | 4-1, 4-2, 4-3, 4-4, 4-16, 4-18, 4-19                                                                                                                                                                             |
| Touchdown                                     | <b>9-9</b> , <b>9-17</b> , <b>9-33</b> , <b>9-37</b> , <b>9-38</b> , <b>14-4</b> , <b>16-24</b>                                                                                                                  |
| Crosswinds                                    | <b>9-15</b> , 9-16, <b>9-17</b> , <b>9-18</b> , 9-19, 9-20, 9-33, 13-22, 14-2, 14-4, <b>14-6</b> , 17-6, 18-7                                                                                                    |
| Three-point landing                           | 14-4, <b>14-5</b> , 14-6                                                                                                                                                                                         |
| Wheel landing                                 | 14-4, <b>14-5</b> , 14-6                                                                                                                                                                                         |
| Touchdown in a drift or crab                  | <b>9-35</b>                                                                                                                                                                                                      |
| Tracking over and parallel to a straight line | <b>7-5</b>                                                                                                                                                                                                       |
| Training considerations                       | <b>13-35</b> , <b>15-13</b> , 15-15                                                                                                                                                                              |
| Flight training                               | 13-35, 13-36, 15-14, 15-15                                                                                                                                                                                       |

|                                               |                                                              |
|-----------------------------------------------|--------------------------------------------------------------|
| Ground training                               | <b>15-14</b>                                                 |
| Training for night flight                     | <b>11-7</b>                                                  |
| Transition training                           | <b>12-17</b> , 12-18, 14-15, 15-13, 17-4, 17-7, 17-13, 17-15 |
| Transition training considerations            | <b>17-4</b>                                                  |
| Flight instructors                            | <b>17-4</b>                                                  |
| Flight school                                 | <b>17-4</b>                                                  |
| Trim control                                  | 3-5, <b>3-10</b> , 17-12                                     |
| Turbine inlet temperature (TIT)               | 12-10, 12-11                                                 |
| Turbocharging                                 | <b>12-9</b> , 12-10, 12-11                                   |
| Ground boosting versus altitude turbocharging | <b>12-10</b>                                                 |
| Heat management                               | <b>12-10</b> , 12-11                                         |
| Operating characteristics                     | <b>12-10</b>                                                 |
| Turbocharger failure                          | <b>12-11</b>                                                 |
| Low manifold pressure                         | <b>12-11</b>                                                 |
| Over-boost condition                          | <b>12-11</b>                                                 |
| Turboprop airplane electrical systems         | <b>15-10</b> , 15-11                                         |
| Turboprop engines                             | 1-23, 13-9, <b>15-2</b>                                      |
| Turboprop engine types                        | <b>15-2</b>                                                  |
| Fixed shaft                                   | <b>15-2</b> , 15-3, 15-4, 15-5, 15-9, 15-11                  |
| Split shaft/free turbine engine               | <b>15-5</b> , 15-6, 15-7, 15-9, 15-11, 15-13,                |
| Turbulent air approach and landing            | <b>9-20</b>                                                  |

## U

|                                               |                        |
|-----------------------------------------------|------------------------|
| Unusual attitude versus upsets                | <b>5-1</b>             |
| Upset prevention and recovery                 | <b>5-1</b> , 5-5, 5-27 |
| Upset prevention and recovery training (UPRT) | <b>5-4</b> , 5-27      |
| Use of power                                  | <b>9-31</b> , 10-3     |

## V

|                                   |                                                                                                                                |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| V <sub>1</sub>                    | 16-12, 16-14, 16-15, 16-16                                                                                                     |
| Maximum V <sub>1</sub>            | 16-15                                                                                                                          |
| Minimum V <sub>1</sub>            | 16-15                                                                                                                          |
| Reduced V <sub>1</sub>            | 16-15, 16-16                                                                                                                   |
| Variation of thrust with rpm      | <b>16-3</b>                                                                                                                    |
| Visibility                        | 2-4, 3-17, 7-1, 8-4, 8-5, 8-6, 9-2, 11-3, 11-4, 11-6, 11-9, 11-14, 13-16, 13-20, <b>14-3</b> , 14-8, 16-24, 17-12, 18-7, 18-22 |
| Visual inspection of the aircraft | 2-2                                                                                                                            |
| Visual preflight assessment       | 2-1, <b>2-4</b>                                                                                                                |
| V-speeds                          | 13-1, 13-2, <b>16-12</b>                                                                                                       |
| V <sub>LOF</sub>                  | 13-10, 13-15, 16-12, 16-16                                                                                                     |

|           |                                                                                                                               |
|-----------|-------------------------------------------------------------------------------------------------------------------------------|
| $V_{MC}$  | 13-2, 13-15, 13-17, 13-18, 13-20, <b>13-23</b> , 13-24, 13-25, <b>13-26</b> , 13-27, 13-28, 13-29, 13-31, 13-35, 13-37, 16-12 |
| $V_R$     | 2-22, 13-1, 13-10, 13-14, 13-15, 16-12, 16-14, 16-16                                                                          |
| $V_{REF}$ | 13-1, 16-20, 16-22                                                                                                            |
| $V_{SSE}$ | 13-1, 13-18, 13-25, 13-26, 13-35, 15-36,                                                                                      |
| $V_X$     | 3-17, 4-17, 6-10, 6-11, 6-12, 6-13, 13-1, 13-17, 13-19, 13-22,                                                                |
| $V_{XSE}$ | 13-1, 13-17,                                                                                                                  |
| $V_Y$     | 3-17, 4-8, 4-17, 5-26, 6-4, 6-5, 6-6, 6-10, 6-11, 6-12, 6-13, 13-1, 13-15, 13-16, 13-17, 13-19, 13-22, 13-31,                 |
| $V_{YSE}$ | 13-1, 13-12, 13-16, 13-18, 13-20, 13-26, 13-27, 13-29, 13-30, 13-31, 13, 32, 13-34, 13-35, 13-37                              |

## W

|                                                 |                                                                    |
|-------------------------------------------------|--------------------------------------------------------------------|
| Weather considerations                          | 17-4, <b>17-7</b>                                                  |
| Weathervaning                                   | 2-19, 2-20, 6-8, 9-18, 9-36, 14-1, <b>14-2</b> , 14-3, 14-7, 14-8, |
| Weight and balance                              | 2-4, 5-23, 5-26, 13-11, <b>13-12</b> , 13-13, 17-9                 |
| Basic empty weight                              | 13-12, 13-13, 13-14                                                |
| Empty weight                                    | 13-12, 13-13,                                                      |
| Maximum landing weight                          | 13-14                                                              |
| Ramp weight                                     | 13-14                                                              |
| Standard empty weight                           | 13-12, 13-13,                                                      |
| Zero fuel weight                                | 13-13                                                              |
| Weight and balance requirement related to spins | <b>5-26</b>                                                        |
| Wheelbarrowing                                  | 6-12, 9-20, <b>9-35</b> , 9-37, 13-17                              |
| Wing rising after touchdown                     | <b>9-37</b>                                                        |

## Y

|            |                     |
|------------|---------------------|
| Yaw damper | <b>13-8</b> , 13-16 |
| Yaw string | 13-27, 13-29        |